MILITARY SPECIFICATION SHEET

# POST, BINDING, ELECTRICAL (UNINSULATED),

# TYPE PB06NC01

The complete requirements for procuring the binding posts described herein shall consist of this document and the latest issue of Specification MIL-P-55149.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

| INCHES | MM |
|---|---|
| .109 | 2.77 |
| .125 | 3.18 |
| .312 | 7.92 |
| .375 | 9.53 |
| .500 | 12.70 |
| .750 | 19.05 |

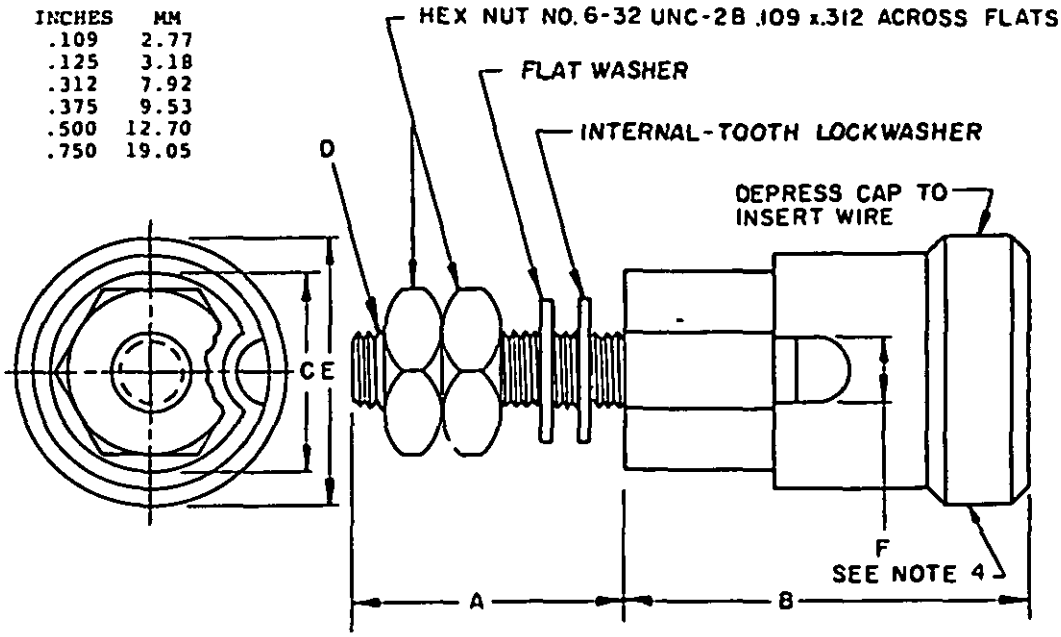


| Type designation | Insulation color | Dimensions | | | | | |
|---|---|---|---|---|---|---|---|
| | | A | B max | C | D | E | F |
| PB06NC01 | Black | .500 | .750 | .375 | 6-32 UNC-2A | .500 | .125 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx ±.015(.38 mm)
4. This is insulated portion.
5. Drawing depicts only general characteristics and is not intended to limit specific manufacturing processes. Shape of insulated portion is optional.



FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Cap spring pressure: 5 pounds minimum; 9 pounds maximum.

Conductor retention: Method I.

Vibration: Applicable.

Shock: Applicable.

Cap retention: Applicable.

Contact resistance: Applicable.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MI, AT
Navy - AS
Air Force -
DSA - GS

User activities:
Army - WC
Navy - OS, SH, MC
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0632)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.