[INCH-POUND]
A-A-55143/2A
January 24, 1996

COMMERCIAL ITEM DESCRIPTION

RELAYS, ELECTROMAGNETIC, GENERAL PURPOSE 10 AMPERES, 1-3PDT, AC AND DC COILS, FLANGE MOUNT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the requirements for 10 ampere, 1,2 and 3PDT, ac and dc coil, flange mounted, general purpose, electromechanical relays. Relays covered by this CID are intended for commercial, industrial, and ground support applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 6.1): AA55143/2- (plus a dash number from table I). Complete PIN example: AA55143/2-01.

3. SALIENT CHARACTERISTICS.

3.1 Contact data.

3.1.1 Contact arrangements. This CID covers relays with 1 form C to 3 form C contacts.

3.1.2 Contact material. The relay contact material shall be Ag alloy or AgCaO.

3.1.3 Contact ratings.

a. 1PDT and 2PDT: 10 amperes at 28 V dc or 240 V ac; 1/3 Hp at 120 V ac; 1/2 Hp at 240 V ac.

b. 3PDT: 10 amperes at 28 V dc or 120 V ac; 6 amperes at 240 V ac.

3.2 Coil data.

3.2.1 Rated coil voltage. See table I.

3.2.2 Rated coil power. The rated coil power shall be 1.2 W (dc), 2 to 2.75 VA (ac).

3.2.3 Operate time. The operate time shall be 25 ms maximum with rated coil voltage.

3.2.4 Release time. The release time shall be 25 ms maximum from rated coil voltage.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-5255, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5945

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

3.3 Ambient temperature. The minimum temperature range shall be -30°C to +40°C (ac), -30°C to +65°C (dc).

3.4 Dimensions and configurations. See figure 1.

3.5 Circuit diagrams. See figure 2.

3.6 Enclosure material. The relay enclosure material shall be clear polycarbonate.

3.7 Weight. The relay weight shall be 100 grams (3.5 ounces) maximum.

3.8 Seal. Nonhermetic.

3.9 Marking. Relays supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55143.

5. PACKAGING. Packaging shall be as specified in A-A-55143.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these relays to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents. This section is not applicable to this CID.

6.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.


b. Quality assurance provisions.


c. If a bid sample is required.

d. Packaging requirements.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

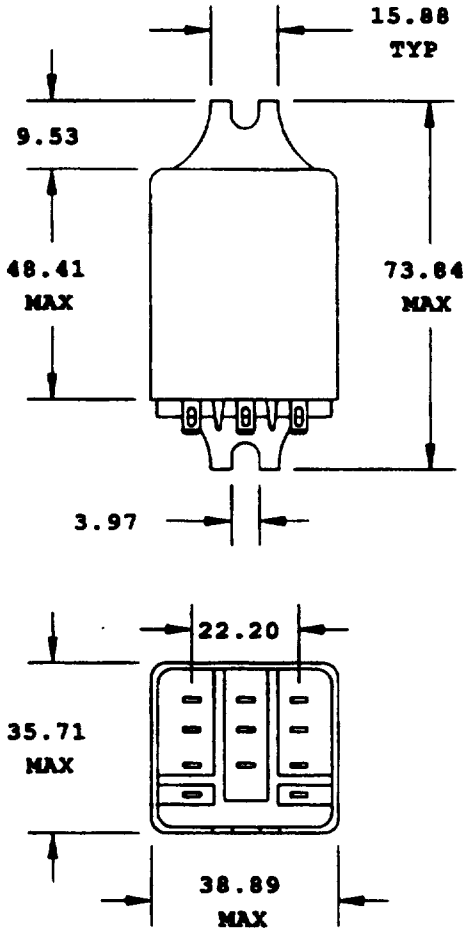

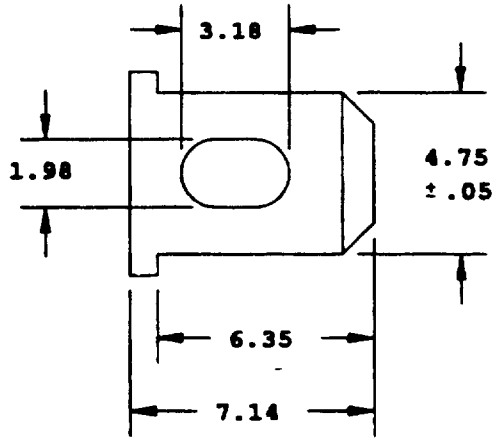

THICKNESS 0.51

TERMINAL DIMENSIONS

mm	Inches
0.05	.002
0.51	.020
1.98	.078
3.18	.125
3.97	.156
4.75	.187
6.35	.250
7.14	.281
9.53	.372
15.88	.625
22.20	.874
35.71	1.406
38.89	1.531
48.41	1.906
73.70	2.902

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.25 millimeter (.010 inch).
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

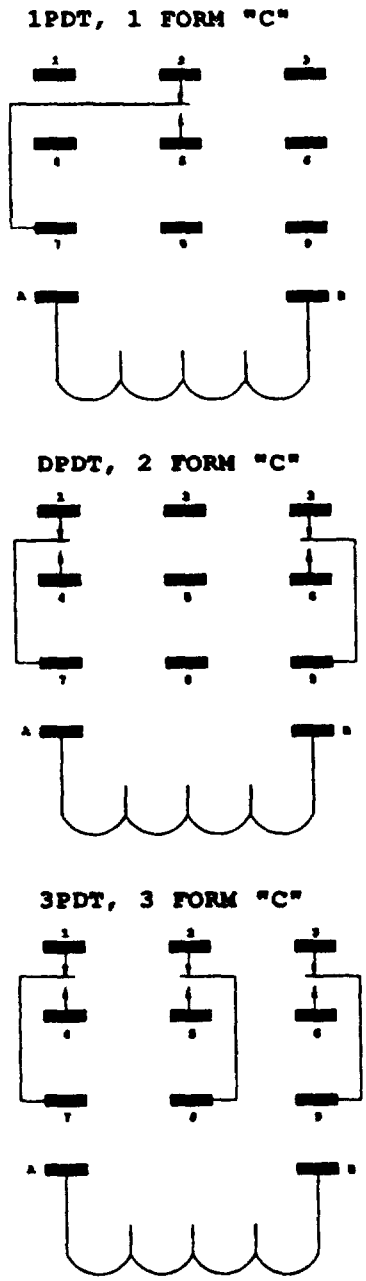


Figure 2 Circuit diagrams (terminal view)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number AA55143/2-	Contact config-uration	Coil voltage		Coil res. ohms ±10%
		V ac	V dc	
01	1PDT	6		6
02	"	12		24
03	"	24		85
04	"	48		
05	"	120		2250
06	"	240		9110
07	"		6	32
08	"		12	120
09	"		24	470
10	"		48	1800
11	"		110	10000
12	2PDT	6		6
13	"	12		24
14	"	24		85
15	"	48		
16	"	120		2250
17	"	240		9110
18	"		6	32
19	"		12	120
20	"		24	470
21	"		48	1800
22	"		110	10000
23	3PDT	6		4.2
24	"	12		18
25	"	24		72
26	"	48		
27	"	120		1700
28	"	240		7200
29	"		6	32
30	"		12	120
31	"		24	470
32	"		48	1800
33	"		110	10000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

6.6 Government users. To acquire information on obtaining these relays from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOP, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

AA55143/2-	Manufacturer's PIN CAGE 77342	Manufacturer's PIN CAGE 94696	Manufacturer's PIN CAGE 00213
01	KUP-5A55-6	388ACQX-1	A283XAXC1-6A
02	KUP-5A55-12	388ACQX-2	A283XAXC1-12A
03	KUP-5A55-24	388ACQX-3	A283XAXC1-24A
04	KUP-5A55-48	388ACQX-16	A283XAXC1-48A
05	KUP-5A55-120	W388ACQX-4	A283XAXC1-120A
06	KUP-5A55-240	W388ACQX-5	A283XAXC1-240A
07	KUP-5D55-6	388CQX-1	A283XAXC1-6D
08	KUP-5D55-12	W388CQX-2	A283XAXC1-12D
09	KUP-5D55-24	W388CQX-3	A283XAXC1-24D
10	KUP-5D55-48	388CQX-13	A283XAXC1-48D
11	KUP-5D55-110	388CQX-4	A283XAXC1-110D
12	KUP-11D55-6	388ACQX-6	A283XBXC1-6A
13	KUP-11D55-12	388ACQX-7	A283XBXC1-12A
14	KUP-11A55-24	388ACQX-8	A283XBXC1-24A
15	KUP-11A55-48	388ACQX-17	A283XBXC1-48A
16	KUP-11A55-120	W388ACQX-9	A283XBXC1-120A
17	KUP-11A55-240	W388ACQX-10	A283XBXC1-240A
18	KUP-11D55-6	388CQX-5	A283XBXC1-6D
19	KUP-11D55-12	W388CQX-6	A283XBXC1-12D
20	KUP-11D55-24	W388CQX-7	A283XBXC1-24D
21	KUP-11D55-48	388CQX-14	A283XBXC1-48D
22	KUP-11D55-110	388CQX-8	A283XBXC1-110D
23	KUP-14A55-6	388CQX-11	A283XCXC1-6A
24	KUP-14A55-12	388ACQX-12	A283XCXC1-12A
25	KUP-14A55-24	388ACQX-13	A283XCXC1-24A
26	KUP-14A55-48	388ACQX-18	A283XCXC1-48A
27	KUP-14A55-120	W388ACQX-14	A283XCXC1-120A
28	KUP-14A55-240	W388ACQX-15	A283XCXC1-240A
29	KUP-14D55-6	388CQX-9	A283XCXC1-6D
30	KUP-14D55-12	388CQX-10	A283XCXC1-12D
31	KUP-14D55-24	W388CQX-11	A283XCXC1-24D
32	KUP-14D55-48	388CQX-15	A283XCXC1-48D
33	KUP-14D55-110	W388CQX-12	A283XCXC1-110D

MFGR's CAGE	MFGR's name and address
94696	Magnecraft Electric Company 700 Orange Street Darlington, SC 29532-9986 (708) 441-2525
00213	MSD, Inc. 700 Orange Street Darlington, SC 29532-9986 (803) 393-5421
77342	Potter & Brumfield 200 S. Richland Creek Dr. Princeton, IN 47671-0001 (800) 225-2550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - ES

Project 5945-D788-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.