[INCH-POUND]
A-A-55171B
September 27, 1995
SUPERSEDING
A-A-55171A
April 29, 1994


COMMERCIAL ITEM DESCRIPTION

FILTER, RADIO FREQUENCY INTERFERENCE

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Federal Specification W-F-2190/11 which is canceled.

1. SCOPE. This CID covers the general requirements for radio frequency interference (RFI) suppression power line filters. These filters consist of capacitors and inductors used in combination with each other and are provided with resistors as a safety feature. This series of RFI filters incorporate the special International Electrotechnical Commission (IEC) power line connector. Filters covered by this CID are intended for commercial/industrial applications and should not be used in military systems needing stringent environmental and electrical requirements.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).



3. SALIENT CHARACTERISTICS

3.1 Design and construction. The case configuration and dimensions shall be as specified on figure 1.

3.2 Voltage rating. The voltage rating shall be 120 V ac at 60 Hz; 250 V ac at 50 Hz.

3.3 Operating frequency. The operating frequency shall be 50/60 Hz.

3.4 Current rating. The current rating shall be as specified in table I.

3.5 Operating ambient temperature range. The operating ambient temperature range shall be -10°C to +40°C at rated current.

3.6 Maximum leakage current, line-to-ground. The maximum leakage current, line-to-ground, shall be 0.25 mA at 120 V ac, 60 Hz; .50 mA at 250 V ac, 50 Hz.

3.7 Hipot rating (1 minute). The hipot rating shall be 2250 V dc line-to-ground; 1450 V dc line-to-line.

3.8 Insertion loss. Insertion loss is given for line-to-ground in a 50-ohm circuit. Values shall be as specified in table I.

3.9 Electrical schematics. The electrical schematics shall be as specified on figure 2.


3.10 Marking. Filters supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-8271, or facsimile (FAX) (513) 296-8868.


AMSC N/A
FSC 5915

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

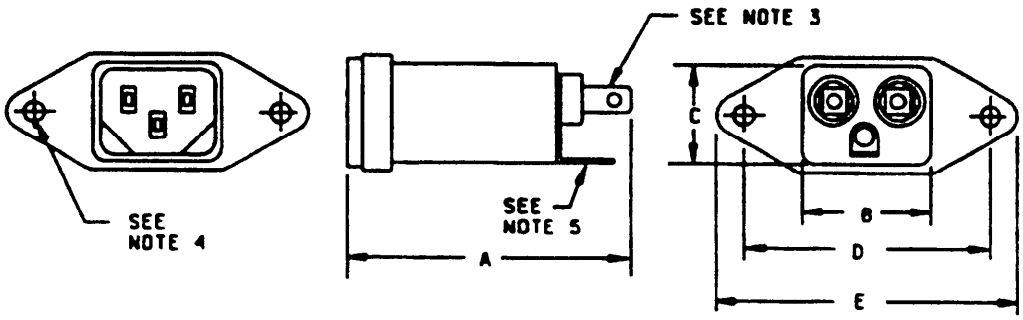

Case style 1

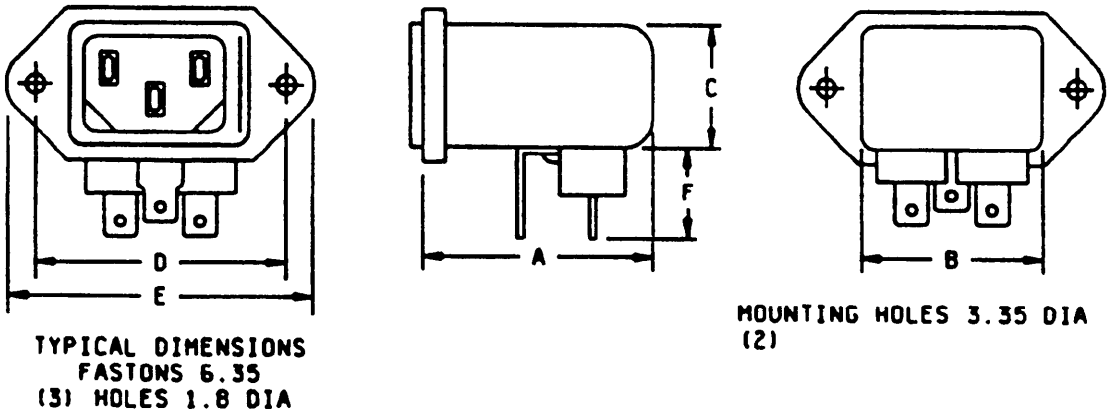

Case style 2

Figure 1. Case configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

PIN A-A-55171-	A (max)		B (max)		C (max)		D ±.015/±.38		E (max)		F (max)	
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
01	55.9	2.20	30.2	1.19	20.6	.81	40.01	1.575	50.3	1.98	---	---
02	55.9	2.20	30.2	1.19	20.6	.81	40.01	1.575	50.3	1.98	---	---
03	55.9	2.20	30.2	1.19	20.6	.81	40.01	1.575	50.3	1.98	---	---
04	66.5	2.62	30.2	1.19	20.6	.81	40.01	1.575	50.3	1.98	---	---
05	66.5	2.62	30.2	1.19	20.6	.81	40.01	1.575	50.3	1.98	---	---
06	39.4	1.55	30.2	1.19	21.6	.85	40.01	1.575	50.3	1.98	16.5	.65
07	39.4	1.55	30.2	1.19	21.6	.85	40.01	1.575	50.3	1.98	16.5	.65
08	39.4	1.55	30.2	1.19	21.6	.85	40.01	1.575	50.3	1.98	16.5	.65

NOTES:
1. Dimensions are in millimeters.
2. The U.S government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.
3. Fastons: (Two) 6.35 mm (.250 inch).
   Holes: 1.8 mm (.07 inch) diameter.
4. Mounting holes: (Two) 3.35 mm (.132 inch) diameter.
5. Ground faston: 1.8 mm (.07 inch) times 3.94 mm (.155 inch) slot.


Figure 1. Case configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.


TABLE I. Current rating and insertion loss.

Dash number A-A-55171-	Current rating	Case style	Minimum insertion loss (dB) line-to-ground in 50-ohm circuit					
			Frequency (MHz)					
			.15	.5	1	5	10	30
01	1 A	1	22	35	40	46	50	49
02	3 A	1	15	25	30	45	50	54
03	6 A	1	9	20	25	41	45	50
04	10 A	1	8	15	20	34	39	44
05 1/	10 A	1	8	15	20	34	39	44
06	1 A	2	22	35	40	46	50	49
07	3 A	2	15	25	30	45	50	54
08	6 A	2	9	20	25	41	45	50

1/ A-A-55171-05 employs schematic B.

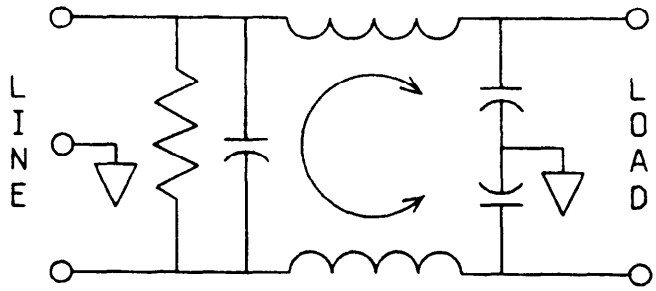

Schematic A

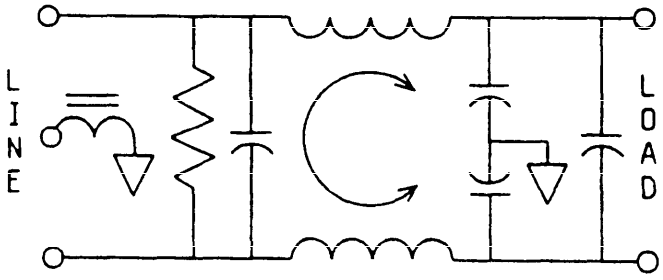

Schematic B

Figure 2. Electrical schematics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Certificate of compliance. Each contractor desiring to be listed as a suggested source of supply shall submit a DESC certificate of compliance to DESC-ELDM. This certificate shall state that the contractor's product meets all the requirements of this CID. In addition, a certificate of compliance shall accompany all filters supplied to this CID.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these filters to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Government users. To acquire information on obtaining these filters from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOP, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-6141.

6.4 Ordering data. The contract or purchase order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. If a bid sample is required.

d. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

6.5 Suggested sources of supply. Suggested sources of supply are listed herein. Additional sources will be added as they become available.

TABLE II. Suggested sources of supply.

CID dash number (PIN)	Vendor CAGE number		
	0S2B1	05245	13050
	Vendor commercial PIN		
A-A-55171-01	RME-AC-101	1EF1F	5004-2026
A-A-55171-02	RME-AC-103	3EF1F	5004-2027
A-A-55171-03	RME-AC-106	6EF1F	5004-2028
A-A-55171-04	RME-AC-110	10EF1F	5004-2145
A-A-55171-05	RME-AC-110-1	10EF1FC	5004-2145-A
A-A-55171-06	RME-AC-201	1EF2F	5004-2146
A-A-55171-07	RME-AC-203	3EF2F	5004-2147
A-A-55171-08	RME-AC-206	6EF2F	5004-2148

Vendor CAGE number	Vendor name and address
0S2B1	RME Filters, Incorporated P.O. Box 838 98 Route 101 A Amherst, NH 03031-0838
05245	CORCOM, Incorporated 1600 Winchester Road Libertyville, IL 60048-1298
13050	Potter Production Corporation 3004 Highway 51 North P.O. Box 337 Wesson, MS 39191-9138

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - ES

Project 5915-D488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

KEEP FROZEN OR KEEP REFRIGERATED