INCH-POUND

A-A-55175
1 March 1993

COMMERCIAL ITEM DESCRIPTION

TRUNKS, PHYSICAL FITNESS UNIFORM

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-T-44213.

Abstract. This commercial item description covers one type of cotton/polyester blend trunks used by Military personnel of the Department of Defense as a component of the Physical Fitness Uniform.

Salient Characteristics. The trunks shall be a boxer style, having a covered elastic waistband with three rows of stitching, 3/4 ± 1.4 inch hemmed leg openings, leg vents at side seams, a full, pre-assembled liner, and a key/change pocket with rounded corners located on the upper right front waistband. The pocket shall be 3 ± 1/2 inches in width at top folded edge and 4 ± 1/2 inches in length from the bottom edge of waistband to bottom edge of pocket (see Figure 1). All seams shall be overedged stitched and the gage of the stitching shall be 3/16 ± 1/16 inch. Figure 1 is furnished solely for guidance and information.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Material. The cloth for the body of the trunks shall be a jersey knit using a cotton/polyester blended yarn of 50 ± 5 percent cotton and the remaining percent polyester. The cloth shall match the standard sample for color heather grey 467 when viewed under filtered tungsten lamps that approximate artificial daylight and that have a correlated color temperature of 7500 ± 200 K, with illumination of 100 ± 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight of 2300 ± 200K, and conform to the characteristics in Table I below.

Table I. Basic Material Testing

Characteristic	Requirement (minimum)	Test Method
Weight, ounces/yard^2	5.8 ± 0.5	ASTM D-3887
Wales per inch	20	ASTM D-3887
Courses per inch	30	ASTM D-3887
Bursting strength (lbs.)	75	ASTM D-3887
Colorfastness:		
Light 1/	4	AATCC 61
Laundering (after 3 cycles	4	AATCC 8
Crocking	3.5	AATCC 16
Perspiration	4	AATCC 15
Ph (Min. to Max.)	5.0 to 8.5	ASTM D-2165

1/ Except that the standard fade hours shall be 40 hours.

Liner. The pre-assembled liner to be used in each of the trunks shall be style #B15 of ADS, Inc. or equal (see NOTES). Liner sizes shall be identified and matched to trunk sizes as shown in the following manner.

Liner color identification	Trunks
Pattern B blue band	Sizes X-small - -Small
Pattern C yellow band	Sizes Medium - Large
Pattern D green band	Size X-large - XX-large

Elastic webbing. The elastic webbing for the waistband shall meet the requirements listed below.

Characteristic	Requirement
Fabrication:	
Width (inches)	1-5/16 +1/4 -1/16
Weight ounces per linear yard	0.50 (minimum)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement
Construction:	
Warp ends/width crocket	16 (minimum)
Elastic strands, full width	14 (minimum)
Filling yarns per inch	46 (minimum)
Fiber content:	
Warp yarn (crocket)	Polyester
Elastic strands	Spandex
Filling yarn	Polyester

Sizes. The trunks shall be provided in the following sizes:

X-Small	(24-26)	Large	(36-38)
Small	(28-30)	X-Large	(40-42)
Medium	(32-34)	XX-Large	(44-46)

NOTE: X-Small, Small, Medium, Large, X-Large, XX-Large may be abbreviated as XSM, SM, MED, LG, XLG and XXLG.

Thread. The thread for the trunks shall be a 50/2 spun polyester, or an equivalent cotton-covered or polyester-covered polyester core, or a high tenacity, textured polyester of approximately 45 Tex. The color of the thread shall be dyed to approximate the shade of the basic material.

Label. A commercial type label is acceptable provided an additional printed cloth label containing the contractor's name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber and laundering information. The body of the instruction label shall be as follows:

CARE INSTRUCTIONS

Hand or machine wash in cold or warm water (maximum 120°F).
Do not Bleach or Iron. Tumble dry at low or medium setting (maximum 160°F).

Patterns. Commercial patterns shall be used. These patterns shall conform to the design cited herein and to the finished measurements listed in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished trunks shall conform to the measurements in Table II below.

Table II. Finished measurements (inches)

Size	Waist Relaxed A/	Waist Extended B/	Front Rise C/	Outseam D/	Thigh E/	Leg Opening F/	Slit G/
X-Small	11	17	12	15-1/2	12-1/2	11	2
Small	12	19	12-1/2	16	13-1/4	12	2
Medium	13	21	13	16-1/2	14	13	2
Large	14	23	13-1/2	17	14-3/4	14	2
X-Large	15	25	14	17-1/2	15-1/2	15	2
XX-Large	16	27	14-1/2	18	16-1/4	16	2
Tolerance	+1 -1/2	Min.	+1 -1/2	+1 -1/2	+1 -1/2	+1 -1/2	± 1/4

A/ Waist relaxed - measure across top of trunks with trunks laying flat.
B/ Waist extended - measure across top of trunks while stretching waist.
C/ Front rise - measure along front center seam from top of elastic waistband to crotch seam
D/ Outseam - measure along side seam from top of trunks to bottom of leg hem.
E/ Thigh - measure parallel to leg opening from crotch point to outside fold of leg. Lay flat, disregard outseam.
F/ Leg opening - measure from side slit to folded edge when trunks are laid down flat.
G/ Slit - measure from beginning of slit to leg bottom.

Workmanship. After completion, the finished trunks shall be clean, and all loose thread, lint, and foreign matter removed. The trunks shall conform to the quality established by this document.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Trunk lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The trunks shall be examined for the defects listed below. The lot size shall be expressed in units of trunks. The sample size is one of the trunks. The inspection level for visual examination shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5.

Defects. The trunks shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; any components missing or other than specified; any seam twisted, puckered or pulled affecting appearance; any needle chews or tight tension; any part of trunks badly pleated, or caught in any unrelated row of stitching; any open seam; any omitted hems; label missing, incorrect, or illegible; measurement of item not as specified.

Dimensional Examination. The finished trunks shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one of the trunks; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Shrinkage. The completed trunks shall not shrink nor elongate more than 10 percent in width or length when tested as specified in end item shrinkage testing, except that the measurement to be taken after testing shall be the outseam and the thigh.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

End item shrinkage testing. The end item shall be tested for shrinkage as specified in Test Method 150 of AATCC using normal machine cycle, ($120^{O} \pm 5^{O}F$) washing temperature and cotton/sturdy dryer setting ($150^{O} \pm 10^{O}F$). The trunks shall not be moistened or pressed before measuring. The measurement shall be taken to the nearest 0.1 inch with the trunks laid flat. Any dimensions not within the specified tolerance shall be classified as a defect. The lot shall be expressed in units of trunks. The sample unit shall be one of the trunks. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 1.0.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Packaging.

Overseas.

Packaging. Each pair of trunks shall be folded and placed in a plastic bag.

Packing. Twenty two pairs of trunks shall be packed in a fiberboard box conforming to style RSC-L, grade 275 of PPP-B-636. The inside dimensions of the box shall be approximately 23-1/2 inches in length, 15 inches in width and 12 inches in depth. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-147.

Domestic.

Packaging, Packing, Palletization and Marking. Packaging, packing, palletization and marking shall be in accordance with ASTM D 3951.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

AATCC Test Methods

(Applications for copies should be addressed to the AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, NC 27709-2215.)

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NOTES:

Suggested source for liner. A suggested source for the liner is ADS, Inc., P. O. Box 1927, Ledbetter Road, Rockingham, NC 28379.

Equal item. Prior to use of an "or equal item", the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

Custodian:

Army - GL

Review Activity:

Army - MD

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0899

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

A RELAXED
B EXTENDED

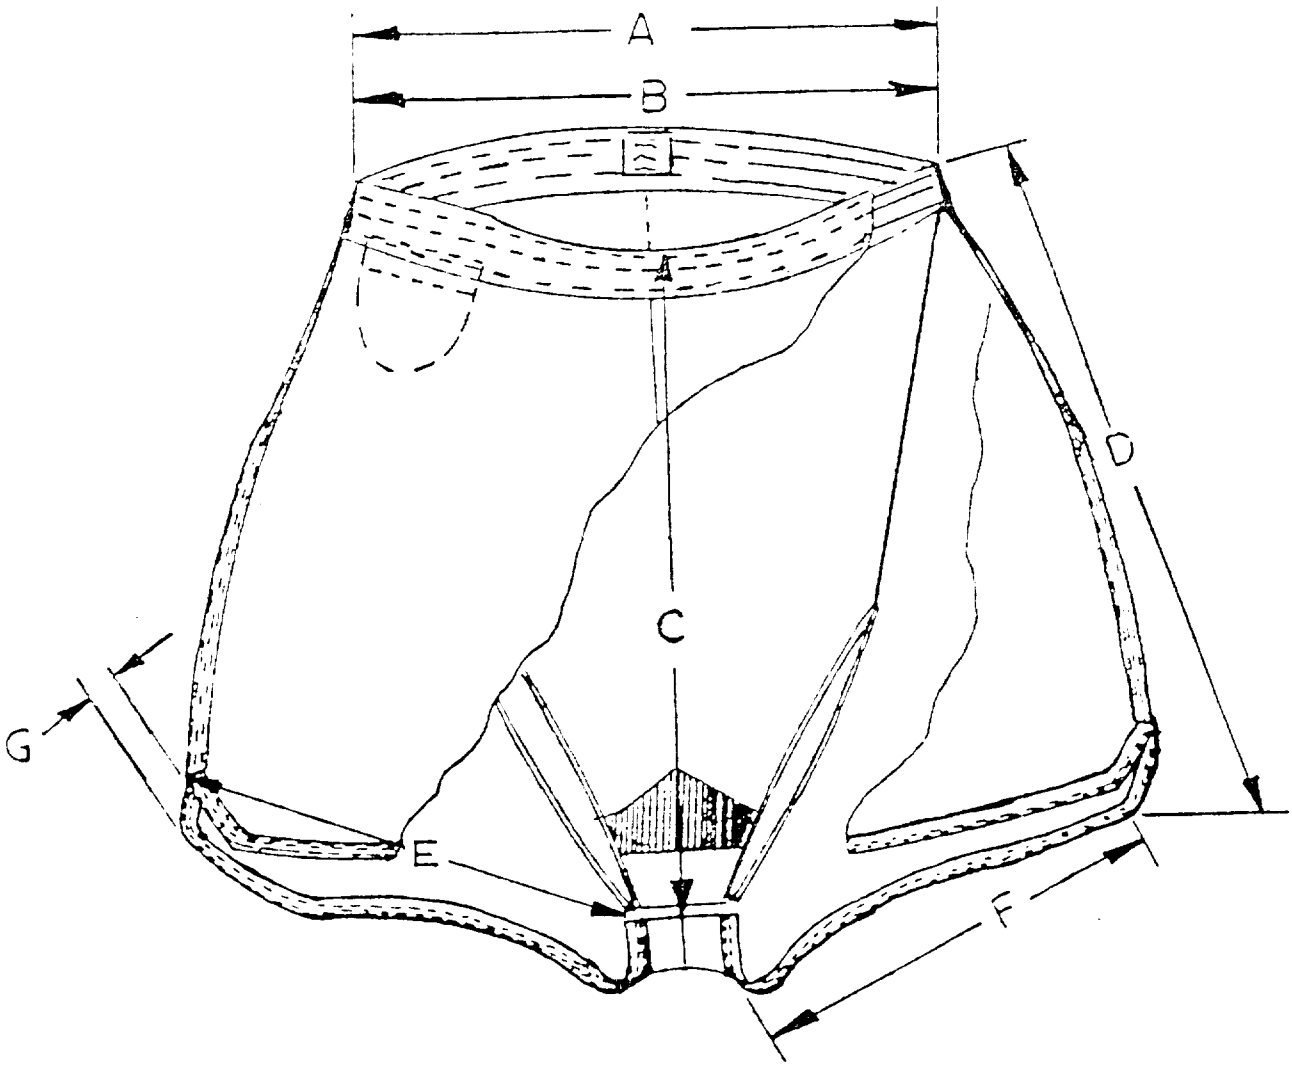


FIGURE 1 - TRUNKS, PHYSICAL FITNESS UNIFORM
(CUT-AWAY VIEW)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55175	93-03-01

3. DOCUMENT TITLE

TRUNKS, PHYSICAL FITNESS UNIFORM

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.