INCH-POUND

A-A-55179
3 March 1993

COMMERCIAL ITEM DESCRIPTION

BAG, MONEY

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-B-87018.

Abstract. This document covers the requirements for a leather bag used for the transportation of money.

Salient Characteristics. The money bag shall be made of leather with a partition, a reinforced bottom, two straps with handles, bottom metal studs and shall be equipped with a padlock and keys. The construction of the money bag shall conform to figures 1 through 4 and shall be as specified herein. The bottom reinforcement panel shall consist of a piece of leather cemented to a reinforcing board. The finished leather side shall face toward the inside of the bag. The straps may be constructed from one or two pieces of leather, joined at the bottom of the bag under one or both strap loops. Each handle shall consist of that portion of the strap which is folded in half lengthwise and stitched together.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Materials.

Leather. The bag shall be constructed of case leather with the grain side dyed black The leather shall be full grain or corrected grain, vegetable tanned cattlehide. Corrected grain leather shall be full grain leather that has been lightly snuffed on the grain side to remove superficial blemishes. The flesh side may be buffed, shaved or split to secure greater uniformity of thickness. The grain side shall be smooth or embossed in fine grain. The leather shall be mildew resistant treated so that the paranitrophenol fungicide content is not less than 0.18 percent nor more than 0 70 percent Thickness of the leather used for the front, bottom, back-top-flap piece, end panels, straps and end flaps shall be 7-1/2 (±1/2) ounces. Thickness of the leather used for the corner reinforcements, loops and handle tab shall be 5 (±1/2) ounces.

Leather, Reinforcing. The leather used for the partition and end and bottom reinforcement panels shall be firm, vegetable tanned, split cattlehide. The color shall be natural. The leather shall be mildew-resistant treated and shall meet the paranitrophenol requirements for leather stated in the Leather paragraph above Thickness of the leather shall be 5 (±1/2) ounces.

Thread. Thread used for stitching operations shall be one of those specified below and shall be black in color. Thread may be linen, 4 ply conforming to A-A-50197. Thread may be nylon, twisted multiple cord, soft finish, 3 ply, 205 nominal Tex No. (g/km) with a breaking force of 27.0 pounds minimum. Thread may be nylon, twisted multiple cord, bonded finish, 3 ply, 268 nominal Tex No. (g/km) with a breaking force of 27 0 pounds minimum. Thread may be polyester, twisted soft multiple cord, normal elongation, general purpose, 3 ply, 210 nominal Tex size with a breaking strength of 24 pounds minimum Thread may be polyester, twisted bonded multiple cord, normal elongation, general purpose, 3 ply, 210 nominal Tex size with a breaking strength of 25 pounds minimum. Thread may be cotton, 4 ply, ticket No 8 of A-A-52094

Adhesive. The adhesive used for bonding any part of the bag shall be any suitable adhesive.

Rivets and Caps. Brass tubular rivets shall have an oval-head. Rivet caps for use with tubular rivets shall be brass. As an alternate, the rivets and caps may be brass-plated steel and lacquered

Studs. The studs used on the bottom of the bag shall be a commercial split type, with a hemispherical shaped head approximately 7/8 inch in diameter The studs shall be brass-plated steel and lacquered. The shank of the stud shall be of sufficient length to firmly attach the parts through which they are driven.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Snap Fasteners. Bright brass snap fasteners shall be regular wire spring clamp type.

Hasp, Staple and Lock. Each bag shall be equipped with a three, four or 6 hole, solid brass hasp and brass staple securely attached by small rivets and washers. The staple shall have an opening of approximately 5/16 inch diameter. The lock shall be a steel or brass, 1 inch pin tumbler padlock furnished with two keys. The hasp, staple and lock shall be sufficiently durable and secure for the intended purpose.

Reinforcing Board. The material used for reinforcing the bottom of the bag shall be a suitable pressboard, a minimum of 0.090 inches thick and of sufficient strength and stiffness to support the bottom of the bag. As an alternate, plywood of a suitable thickness may be used.

Label/marking. Identification marking shall be in a contrasting color on the inside of the top flap. All lettering shall be at least 3/16 inch high. Markings shall contain the following information:

BAG, MONEY
Stock No
Name of Contractor
Contract No.
US

Patterns. Patterns shall be furnished by the contractor.

Sizes and Measurements. Finished dimensions of the bag and components shall be as specified in figures 1 through 4. When no tolerances are given, dimensions are approximate. The dimensions of the bottom reinforcement panel shall finish approximately 5-1/2 by 14-1/2 inches. The handle shall finish approximately 13 inches from rivet to rivet.

Workmanship. After completion, the finished money bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Money bag lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The bags shall be examined for the defects listed below. The lot size shall be expressed in units of bags. The sample unit is one bag. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Defects. The money bags shall be examined for the following defects: color not as specified, not uniform; grain not as specified; hole, cut or torn area on exterior of bag; grub marks, open or badly healed scratches, brands, boney, loose or pipey leather; heavy fat wrinkles, stretchy leather; grain side not finished as specified; finish not as specified; thread shade does not match color of leather; thread not specified type; lock not approved type; finish not as specified on metal components; studs, rivets, caps and washers not as specified; design not as specified; any component not made from material specified; any component missing or operation not performed as specified; any leather component not attached with grain side out (when applicable); caps and rivets or studs not securely clinched and may become detached in use; lock does not function properly; caps and rivets or studs loose but securely attached; keys missing or do not operate lock; rivets reversed; sharp burrs or sliver on metal components; loose stitch tension causing loose seam; lock stitches exposed on surface of leather; tight stitch tension rupturing leather; open seam; thread ends not trimmed or removed; any spot or stain on exterior of bag; any spot, stain, or foreign matter clearly noticeable; staple does not align properly with hasp; marking missing, incomplete, incorrect, not legible, improper location, not specified size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Dimensional Examination. The finished bags shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one bag; the inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 1.0.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodian:
Navy - NU

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

User Activity:
Navy - MC

Project No. 8460-0084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.



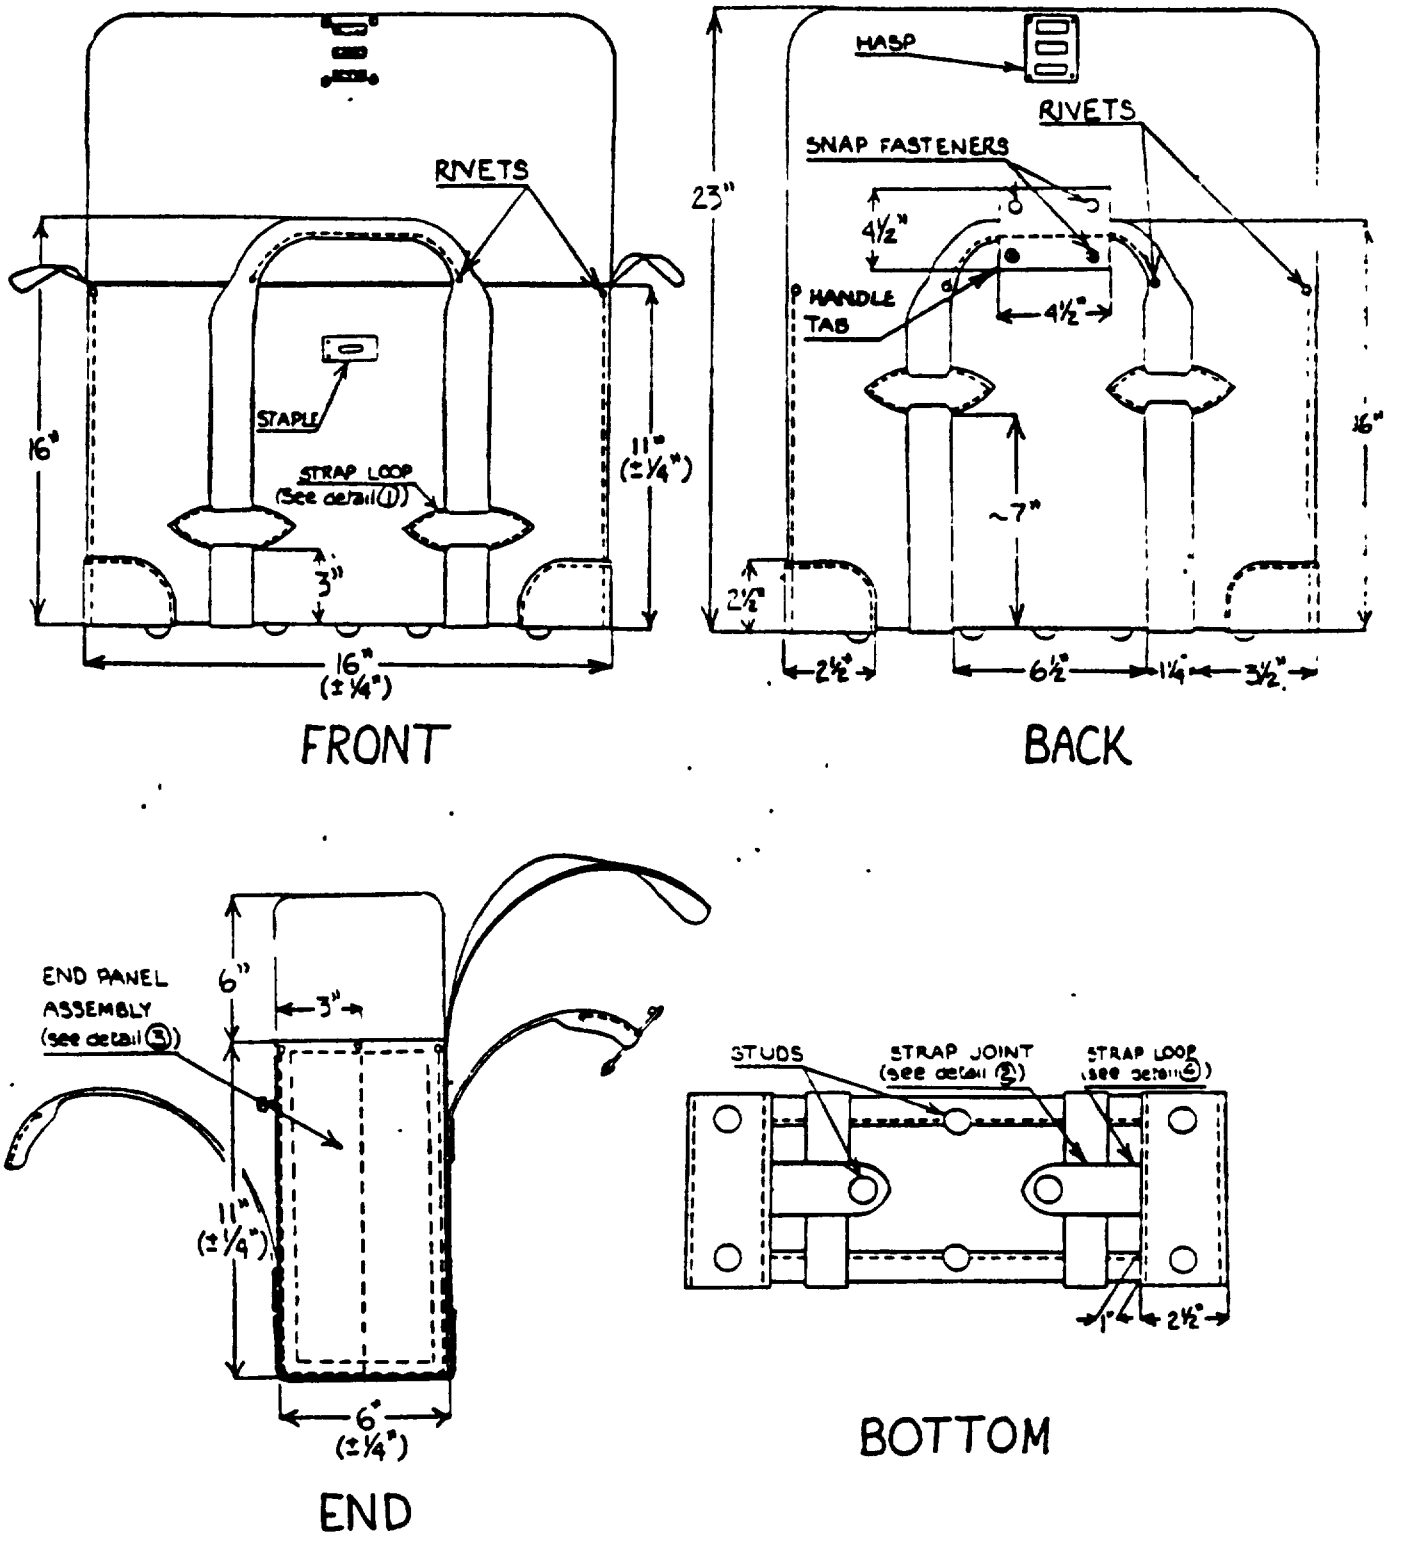


Figure 1. Bag, Money


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

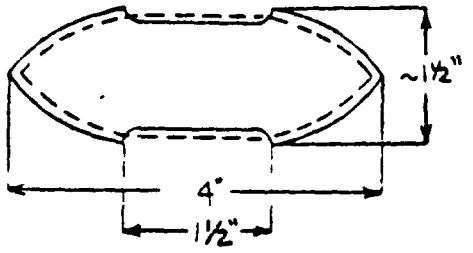


STRAP LOOP ①

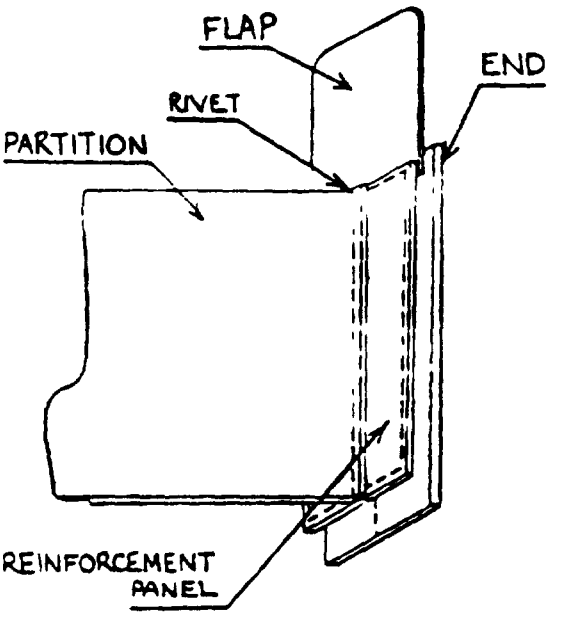

END PANEL ASSEMBLY ③

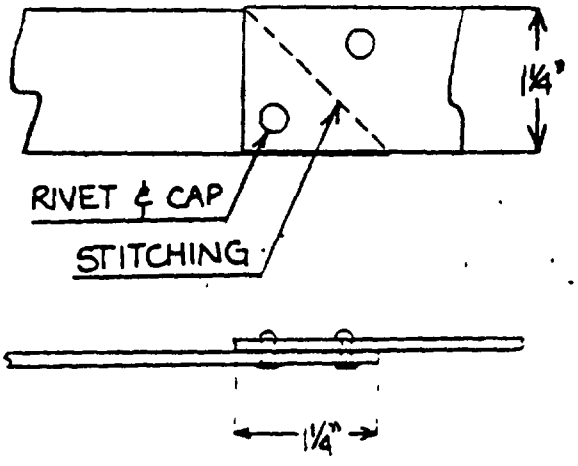

JOINING OF STRAPS AT BOTTOM OF BAG ②

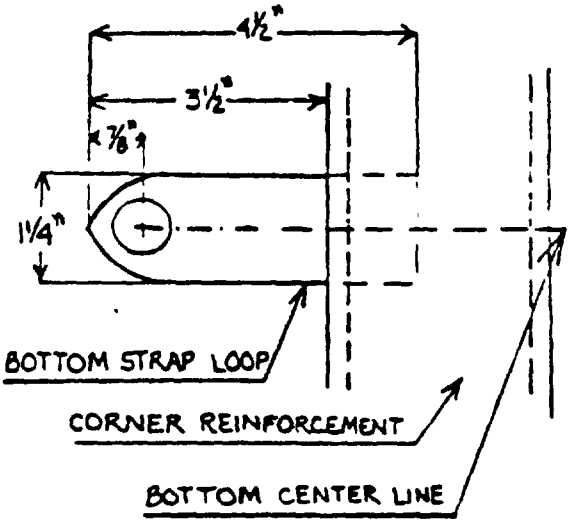

INSERTION OF BOTTOM LOOP ④

Figure 2. Bag, Money (Details)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

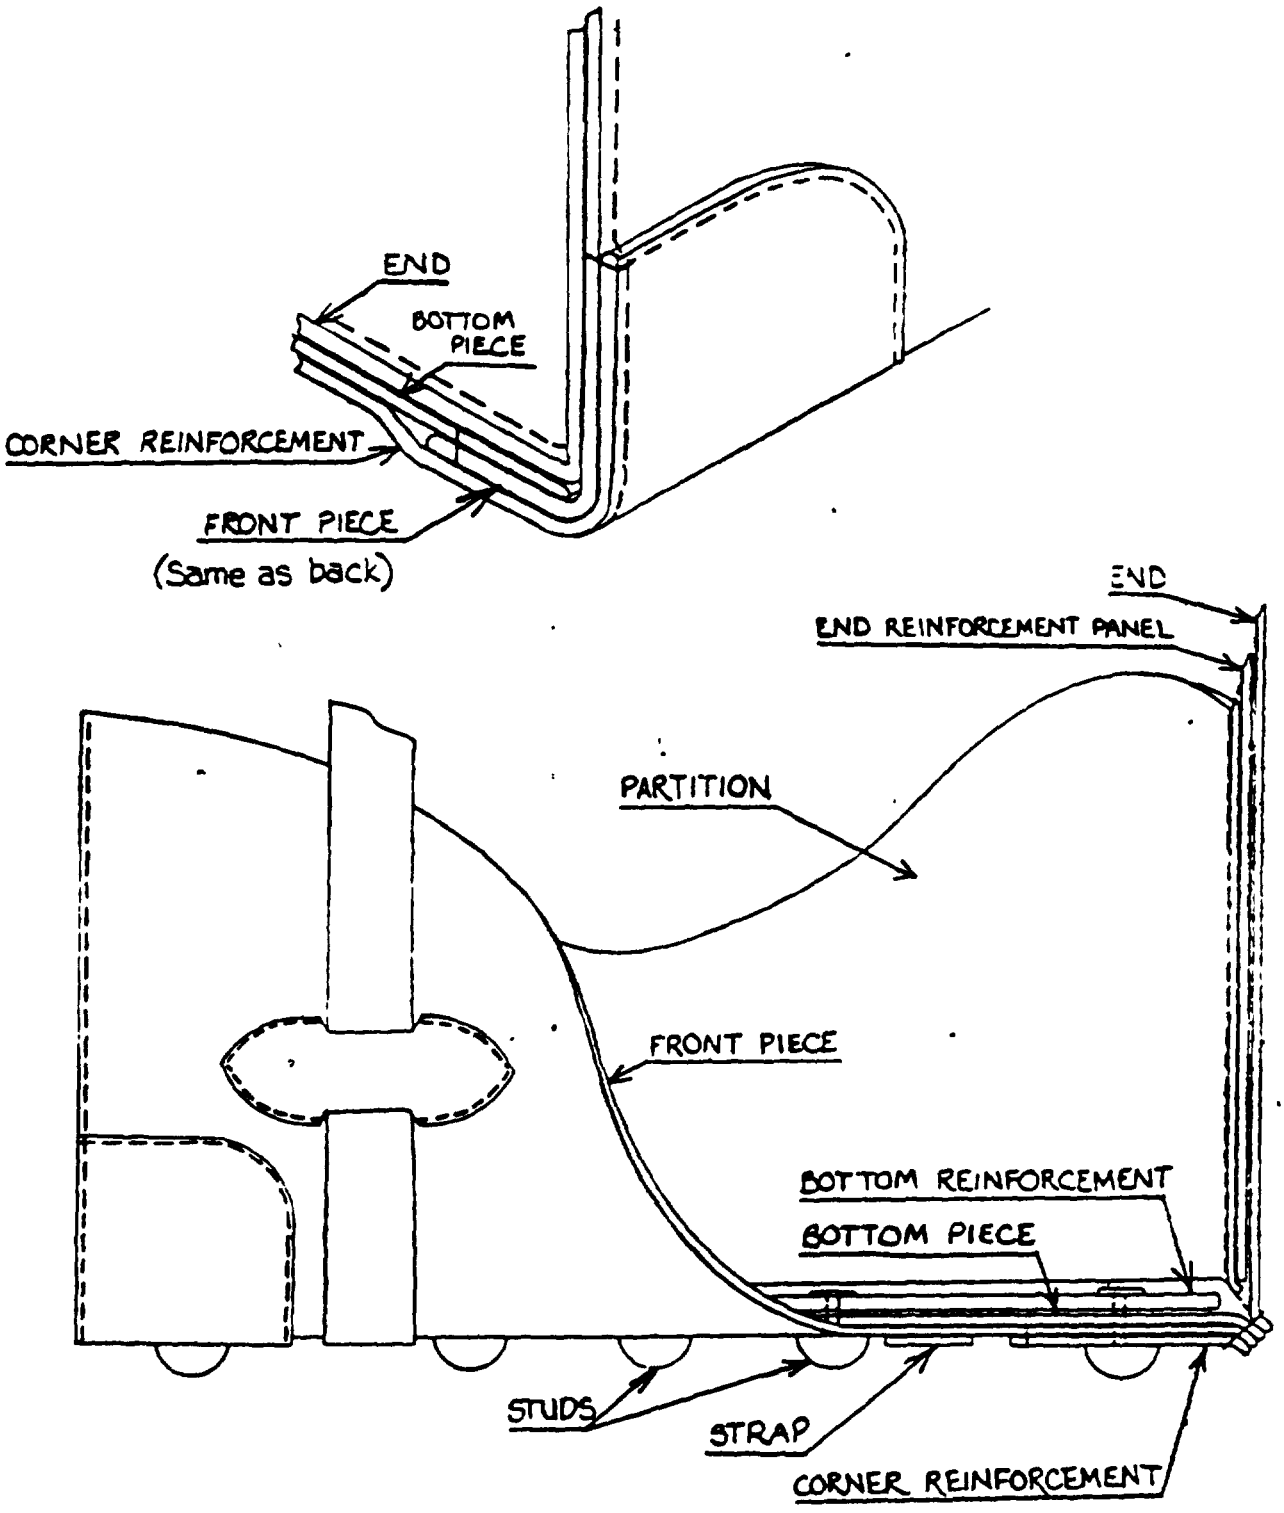


Figure 3. Bag, Money (Bottom/End Assemblies)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

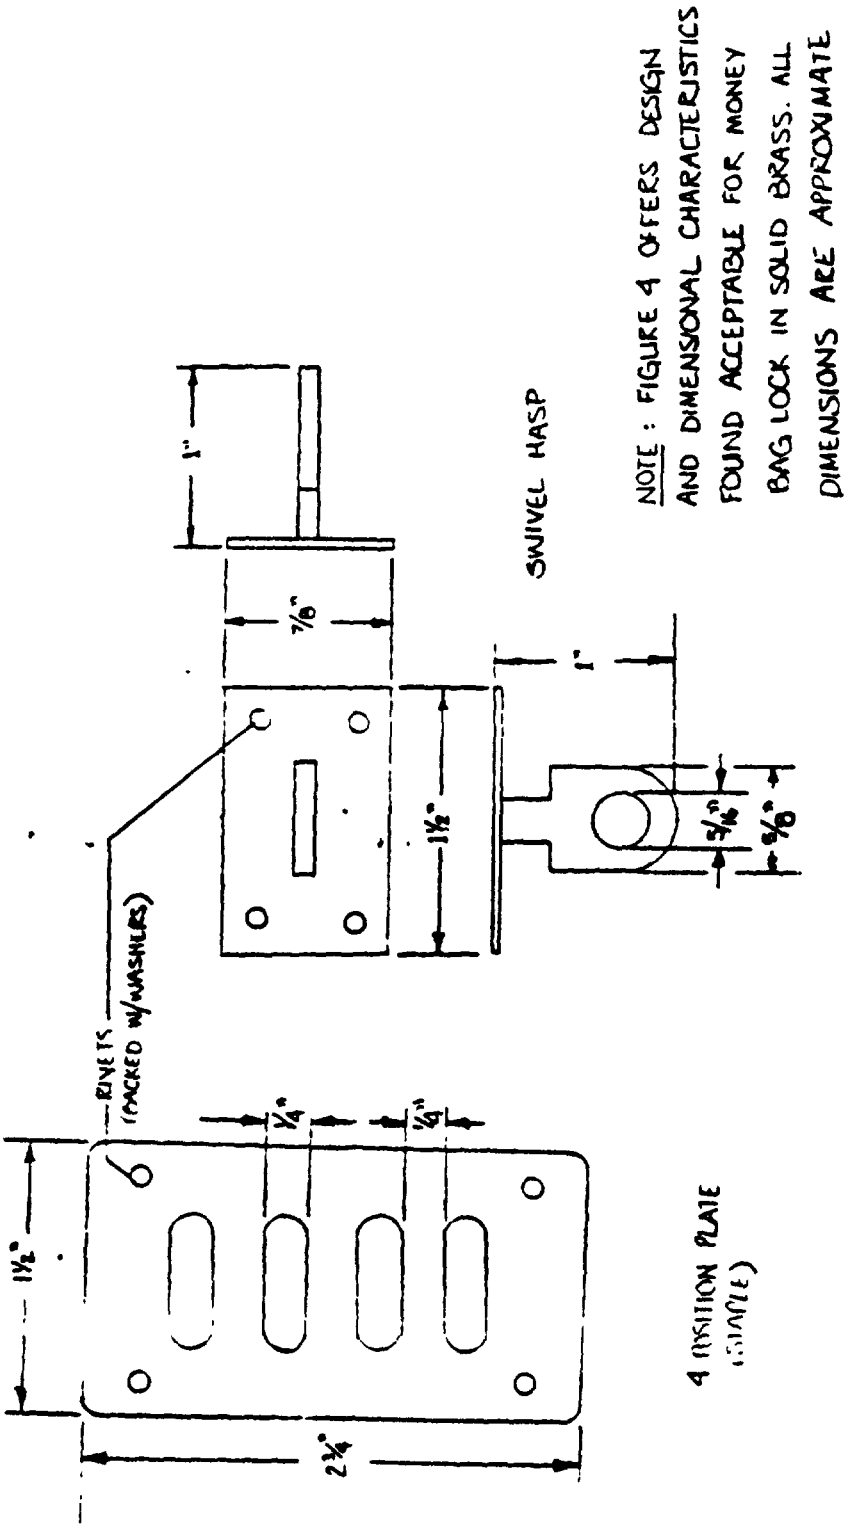


Figure 4. Bag, Money

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER A-A-55179	2 DOCUMENT DATE (YYMMDD) 03 MARCH 1993

3 DOCUMENT TITLE BAG, MONEY

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b TELEPHONE (Include Area Code) (1) Commercial: 215-737-8105 (2) AUTOVON: 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.