INCH-POUND

A-A-55180
4 March 1993

COMMERCIAL ITEM DESCRIPTION

CAP, UTILITY, COTTON, SATEEN, GREEN

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-813.

Abstract. This commercial item description covers caps worn by male personnel of the Navy.

Salient Characteristics. The caps shall have a one-piece crown shaped with eight evenly spaced folded and stitched darts; the two front darts provided with stays; two metal eyelets at each side of the crown for ventilation; the outside band and sweatband each one ply of basic material; and a flexible, quilted hinge type visor (see Figures 1 and 2).

Material. The basic material for the cap, including the sweatband, shall consist of 100% cotton; carded, drawn and spun into singles yarn. The weave shall be a 5 harness sateen with the filling effect on the face side. The cloth shall be singed, desized, mercerized, dyed olive green shade 107, and shall conform to the requirements specified in Table I when tested as specified.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE I - Basic Material Requirements

Characteristic	Test Method	Requirement (Minimum)
Fiber identification	4/	As stated above
Weight	ASTM Method D3776 Option C	9.0 oz./sq. yd.
Yarns per inch	ASTM Method D3775	85 ends /inch 48 picks/inch
Breaking strength	ASTM Method D5034	115 lbs. warp 100 lbs. filling
Colorfastness to light	AATCC 16 Option A	Class 4 1/ 6/
Colorfastness to laundering	AATCC 61 test 3A	Class 4 2/ 3/ 6/
Colorfastness to perspiration	AATCC 15	Class 4 6/
Colorfastness to crocking	AATCC 8	Grade 3.5 7/
Dimensional stability	AATCC 96 Washing method VC	2.0% Max. warp & 2.0% Max. filling 5/

1/ Exposure time of 20 standard fading hours.
2/ 3 complete cycles, specimens must be dried after each cycle.
3/ Use 10 steel balls and multifiber test fabric.
4/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.
5/ Test piece shall measure 22 X 22 inches with 18 inch benchmarks.
6/ AATCC Grey Scale for Color Change.
7/ AATCC Chromatic Transference Scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Inner visor and front stays. The inner visor and stays for the front of the crown shall be made out of a nonwoven material produced from a highly purified alpha cellulose vegetable fiber, wet web impregnated with approximately 22 + 5 percent compounded neoprene and shall conform to the requirements specified in Table II when tested as specified. As an alternate, an acrylic binder may be used.

TABLE II - Visor and Front Stays Requirements.

Characteristic	Test Method	Requirement (Minimum)
Material Identification	1/	As stated above
Compounded neoprene Content	1/	As stated above
Stiffness: Original	ASTM Method D1388 Option A	Machine direction 2.4 load lb. Cross direction 1.5 load lb.
After laundering	AATCC 61 test 3A & ASTM Method D1388 Option A	Machine direction 2.4 load lb. Cross direction 1.5 load lb.
Tearing strength	ASTM Method D1424 2/	Machine direction 1770 gms. Cross direction 2040 gms.
Weight	ASTM Method D1117	2.21 (± 5%) lbs./sq. yd.
Thickness	ASTM Method D1117	0.075 (± 0.003 inch

1/ A certificate of compliance is required and will be acceptable for the requirement stated.

2/ Specimens for the test shall be cut in each principle direction of the non woven.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored 6 to 8 scores, and shall be enameled to closely match the shade of the basic material, or only the flange may be enameled. The eyelet shall conform to the following dimensions:

Outside diameter of barrel:	0.185 ± 0.004 inch
Outside diameter of flange:	0.312 ± 0.005 inch
Length of barrel under flange:	0.145 ± 0.004 inch
Metal thickness:	0.008 ± 0.001 inch

Thread. The cotton thread for all seaming and stitching shall be dyed Olive drab shade S-1, Cable No. 66022, and shall show commercially acceptable colorfastness. Cotton thread, Ticket No. 40, 3 ply may be used, or as an alternate cotton covered polyester thread, Ticket No. 50, 2 ply may be used. Thread shall conform to the requirements specified in Table III when tested as specified.

TABLE III - Thread Requirements.

Characteristic	Test Method	Requirement
Cotton Weight	ASTM Method D1907 test 3A	Ticket No. 40 (8,200 to 10,000 yds./lb.)
Colorfastness to laundering	AATCC 61	Class 4 1/2/3/ 4/6/
Breaking strength	ASTM Method D1578	2.8 lbs. Min.
Cotton covered Polyester Weight	ASTM Method D1907	Ticket No. 50 (11,250 yds./lb. Min.)
Colorfastness to laundering	AATCC 61 test 3A	Class 4 1/2/3/4/ 5/6/
Breaking strength	ASTM Method D1578	3.2 lbs. Min.

1/ 3 complete cycles, specimens must be dried after each cycle.
2/ Use 10 steel balls.
3/ AATCC Grey Scale for Color Change

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

4/ Two to six grams of the thread, so held together to form a unit for testing. Unless otherwise specified in the procurement document, the laundering cycle of the Launder-O-Meter or similar machine shall be 30 minutes and the temperature of the container and its contents shall be maintained at 100° ± 4° F (38° ± 2° C).
5/ The color transfer cloth evaluation shall not apply. No appreciable change in shade or loss of color of the tested specimen shall be visible when compared to the untested thread.
6/ On the color transfer cloth evaluation, only the stain on the cotton fibers of the color transfer cloth shall be evaluated. One determination and the result reported as "pass" or "fail".

Sizes. The caps shall be provided in the following sizes:

Extra Small, Small, Medium, Large, and Extra Large

NOTE: Extra Small, Small, Medium, Large, and Extra Large may be abbreviated as XSM, SM, MED, LG, and XLG.

Label/marking. Each cap shall have an identification and size label. The labels shall be made of a cotton cloth, polyester/cotton blend; heat sealable, adhesive coated, and printed. Fastness for laundering shall apply. The labels shall be tested in accordance with AATCC Method 61, Test IVA.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/2 inch for joining seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Sizes and Measurements The finished caps shall conform to the measurements below.

Table IV. Finished Measurements. 1/

Size	Head measurement
Extra Small	21-1/4
Small	22
Medium	22-3/4
Large	23-1/2
Extra Large	24-1/4

1/ Tolerance: +1/4 inch, -0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Workmanship. The finished caps shall conform to the quality and grade of product established by this commercial item description. The occurrence of defects shall not exceed the levels set by the applicable quality levels

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Cap lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The caps shall be examined for the defects listed below. The lot size shall be expressed in units of caps. The sample unit is one cap. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Defects. The caps shall be examined for the following defects: any weakening defects; any shade variations; any needle chews, cuts, tears or mends; any spots or stains; any component part or required operation omitted; any eyelets omitted or added; any visor not centered with center front of cap or insecurely caught in stitching of outer and inner bands; any outside band that is twisted, pleated, excessively full or irregular; any crown stitching that is omitted; any darts omitted; any front stays omitted; any sweatbands that are twisted, tight, or out of alignment; any label that is omitted, incorrect or illegible; any measurement of item not as specified.

Dimensional Examination. The finished caps shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one cap; the inspection level shall be II and the AQL expressed in terms of defects per hundred units, shall be 1.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists, P O Box 12215, Research Triangle Park, NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Custodian:

Navy - SA

Review Activity:

Navy - SA

User Activity:

Navy - YD

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8405-0200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.



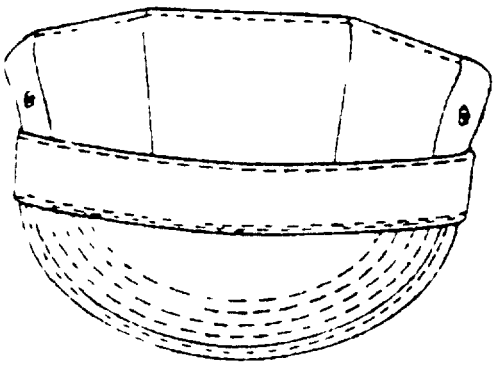


FIGURE 1 - CAP, UTILITY, COTTON, SATEEN, GREEN


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

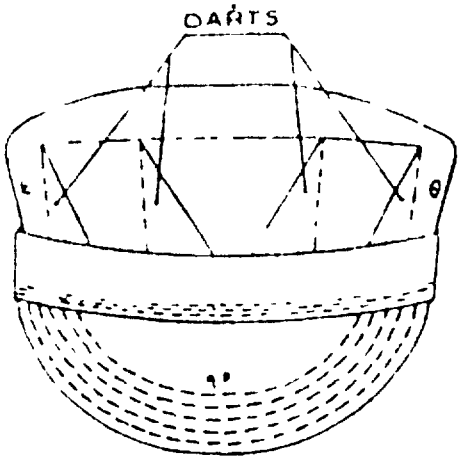

FRONT - INSIDE VIEW

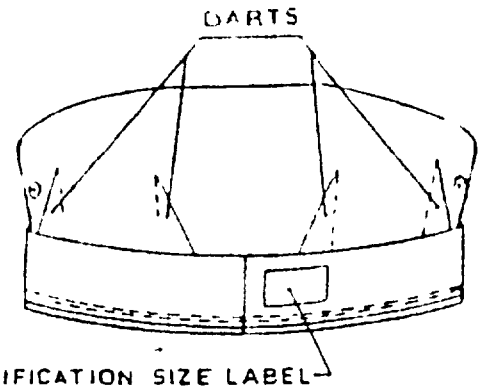

BACK - INSIDE VIEW

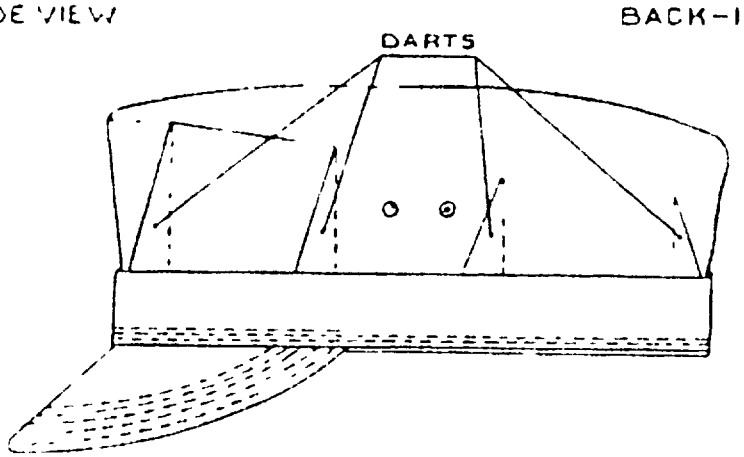

RIGHT - INSIDE VIEW

FIGURE 2. - CAP, UTILITY, COTTON, SAGE GN, OPEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE. This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55180	93-03-04

3. DOCUMENT TITLE

CAP, UTILITY, COTTON, SATEEN, GREEN

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (2-3-1)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 908, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete — 198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.