INCH-POUND

A-A-55182

26 April 1993

COMMERCIAL ITEM DESCRIPTION

COVER, PERSONNEL IDENTIFICATION TAG

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-14635.

Abstract. This commercial item description covers one type and size of plasticized polyvinyl chloride cover sized to fit over the standard personnel identification tag. The finished cover shall be capable of being irreversibly marked with a standard government ball point pen using heavy pressure.

Salient Characteristics. The Tag cover's dimensions shall be 2-5/16 x 1-11/32 x 1/32 inches thick (see Figures 1 & 2). It shall be curved at the opposite ends to a radius of 7/8 inches, measurements taken on the horizontal center line starting 9/32 inches to the left and 9/32 inches to the right of center. A 9/16 inch diameter hole shall be made 5/16 inches from the opening slot and on the horizontal center line. The polyvinyl chloride shall match color Black No. 33613 of FED-STD-595. The marking shall be in accordance with the details and dimensions on figures (see Figures 1 & 2). All lettering on the faces of the cover shall be raised 0.010 inch and shall be legible in the end product.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Material. The plasticized polyvinyl chloride composition shall be non-toxic and non-allergenic. The material (after curing) shall be soft flexible elastomeric plastic.

Workmanship. After completion, the finished tag cover, shall be thoroughly cleaned and all excess material removed in the final processing. The finished tag should have no objectionable odor; edges should be smooth; no lettering missing or not completely molded; no holes missing; surface should not contain voids or pockets.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Component Testing. The plasticized polyvinyl chloride shall be tested for the characteristics listed in table II. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0. The lot size for the plasticized polyvinyl chloride shall be expressed in units of 1 pound. The sample unit shall be four pieces and each piece shall be 18 inches by 6 inches by 0.025 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE II Component Testing

Characteristics	Minimum	Test Method	
Extent of burning test		ASTM D 568	See 1)
Tensile strength at break	2300 p.s.i.	ASTM D 412	
Ultimate elongation, percent	335	ASTM D 412	
Tensile stress at 100 percent elongation	725 p.s.i.	ASTM D 412	
Tear resistance (pounds per inch of thickness)	225	ASTM D 624	See 2)

1) The results shall be reported as pass (self-extinguishing) or fail.

2) Die C specimens shall be used.

End Item Performance Testing. The end items shall conform to the indicated marking requirements when tested. The lot size shall be expressed in units of covers. The sample unit shall be one cover. The inspection level shall be S-1. Any test failure shall be cause for ejection of the lot.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packaging, Labeling, Packing and Marking. The preservation, packaging, labeling packing, and marking shall be as specified in the contract or order.

Source of Government Document. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, Pa. 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institutes, 1430 Broadway, New York, NY 10018-3308)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103)

Custodian:
Army - GL
Navy - NU
Air Force - 99

Review Activity:
Army - MD
Navy - MC
Air Force - 82
Air Force - 45

User Activity:
Army - SM
Navy - MS
Air Force - 45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8465-0112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

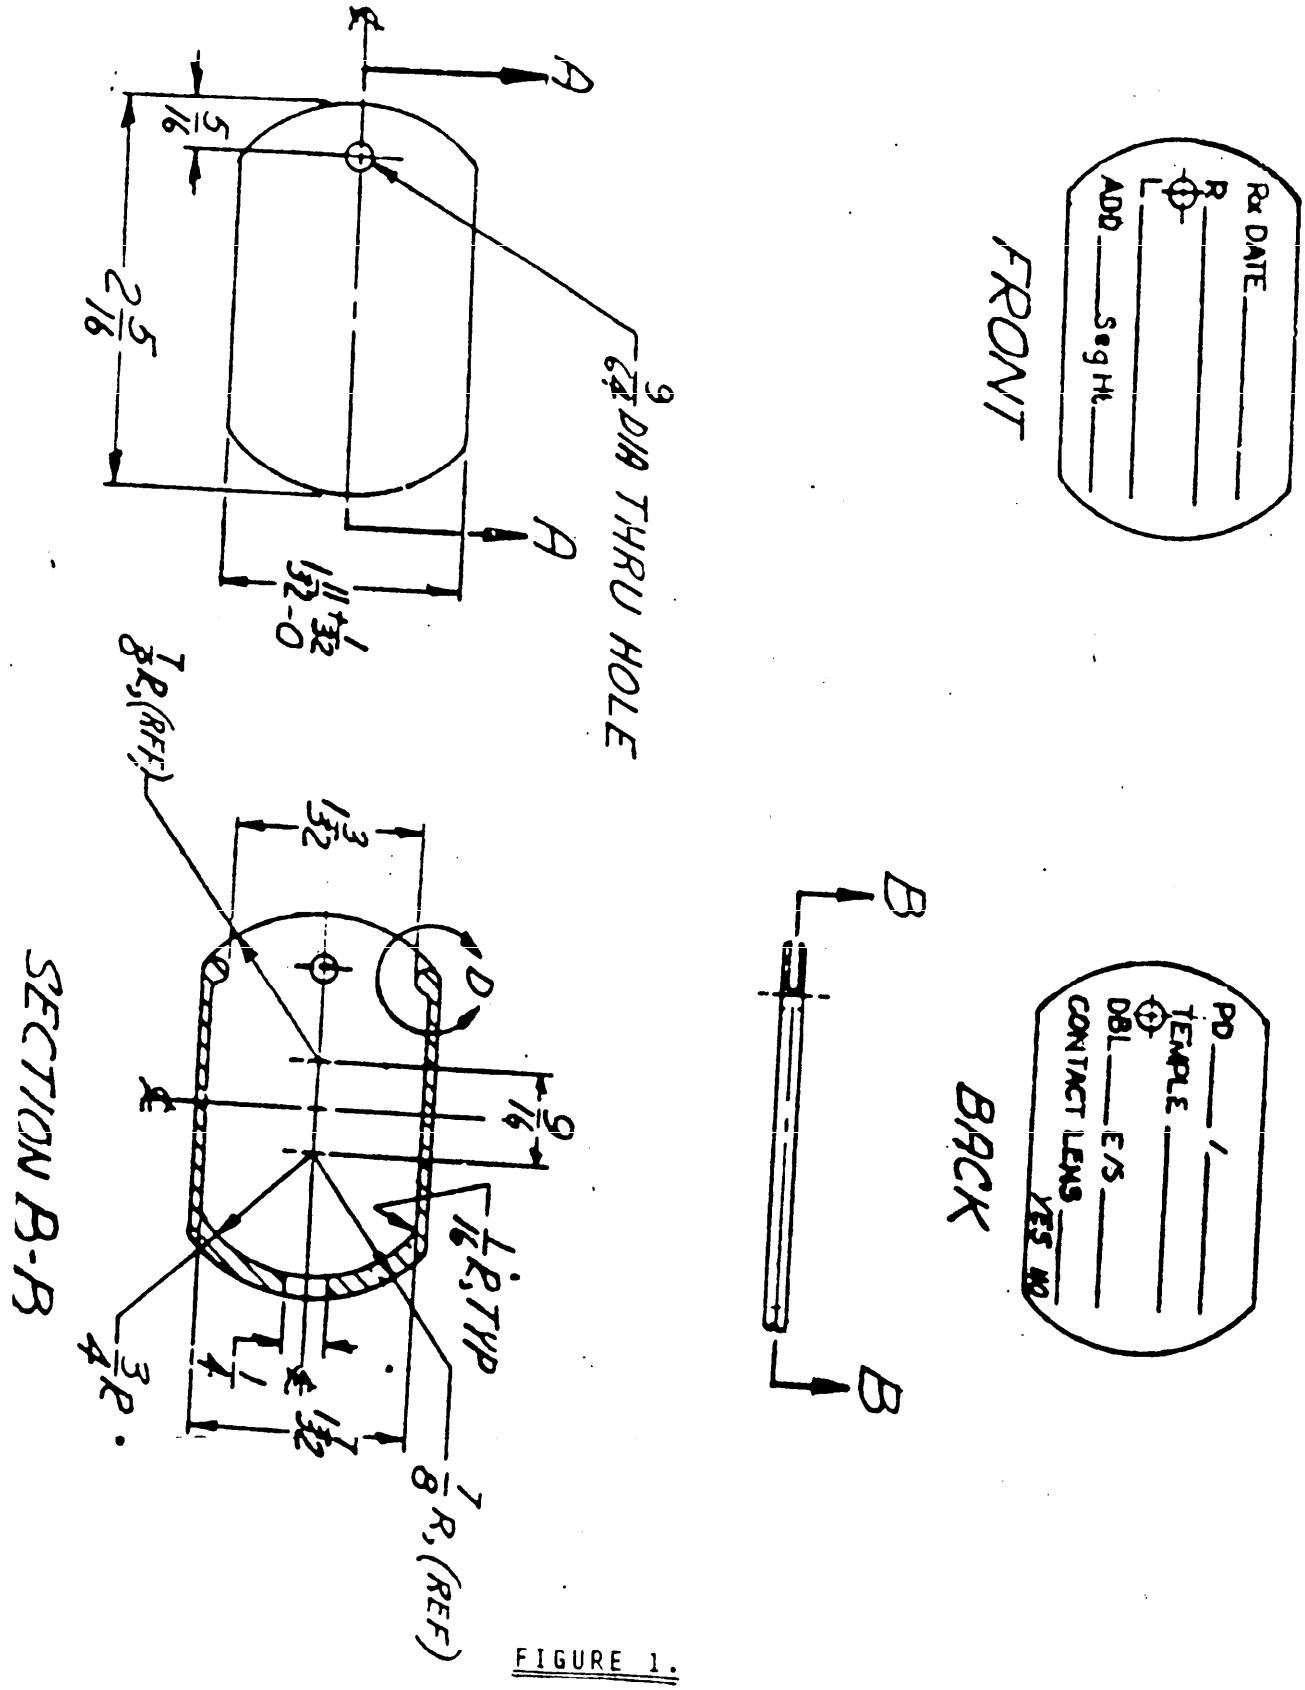


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.