INCH POUND
A-A-55192A
23 August 2000
SUPERSEDING
A-A-55192
7 Aprl1 1993

COMMERCIAL ITEM DESCRIPTION

CASE, MAP

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE. This commercial item description covers map cases to be used to protect maps in the field.

2. CLASSIFICATION. There shall be one type of map case in the following sizes as specified:

Size 1 - 22 inches long by 30 inches wide (+1; -0 inches)
Size 2 - 38-1/2 inches long by 52-3/4 inches wide (+1; -0 inches)

3. SALIENT CHARACTERISTICS. The map cases shall be constructed of two clear pieces of vinyl film and a clear vinyl zipper with an aluminum slide closure.. The film used in fabricating all map cases shall be flexible, for use in a temperature range from 0 degrees F to 130 degrees F (-17 degrees C to 54.4 degrees C) and shall be 0.014 inch thick vinyl chloride or polyvinyl chloride. The Map Case shall have a dull-matte finish. The vinyl cases shall have a minimum of 1/8 inch heat sealed seams on three sides, the two long sides and one short side. The open end of the case shall be fitted with a clear vinyl zipper with an aluminum slide of appropriate length, heat-sealed to the case. One part of the zipper shall be heat sealed to the back of the case and the other part heat sealed to the front part of the case. The ends of the zipper shall be heat sealed to prevent the sides from becoming disengaged.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-COET, 700 Robbins Ave., Philadelphia, PA 19111-5092.

AMSC N/A FSC 8460

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.1.Material.. The flexible/non-rigid vinyl chloride plastic film can be calendered, extruded or cast film. The contractor shall identify the type of film used on the contract or purchase order. Film shall meet all the requirements listed in accordance with ASTM D 1593. The zipper closure shall be made of a clear compound of vinyl chloride or polyvinyl chloride conforming to the resin material requirements specified in ASTM D 1593. The zipper shall have a slider and pull made of aluminum.

3.2 Finish. The film shall have a smooth, dull-matte finish on both sides unless otherwise specified by the contract or purchase order.

3.3 Label. The case shall be labeled with the following:

Item Description
Contract Number
Stock Number
Size
Contractor's Name

The size and the characters shall be approximately ¼ inch high. A white marking medium shall be used. The label shall be clearly legible after being subjected to the ink adhesion test. The label shall be located midway (+/- 2 inches) between the sealed seams and the opening.

3.4 Bar Code/Label Tag. Each item shall be individually bar-coded with a paper tag, standard bleach sulfate with a basis weight of 100 lbs. The bar code shall be a 13 digit national stock number (NSN). The bar code shall be used with a medium to high density and shall be human-readible interpretation (HRI). The label/tag shall be located so that it is completely visible on the item when it is completely folded and/or packaged as specified and shall cause no damage to the item.

3.5 Sizes and Measurements. The finished case shall conform to the measurements below.

Table I. Sizes and Measurements

Size	Length (inches)	Width (inches)	Tolerance (inches)	Zipper Size (inches)	Heat Sealed Seam (inches) + 036,-0
1	22	30	+1, -0	22	1/8
2	38-1/2	52-3/4	+1, -0	38-1/2	l/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.6 Performance.

3.6.1 Sealed Seams. All heat sealed seams shall be a minimum of 1/8 inch wide, cleanly trimmed, with no unsealed film beyond permitted sealed area. The breaking strength of the heat sealed seams shall be not less than 16 pounds when tested in accordance with Method A of ASTM D 882. See Figure 1.

3.6.2 Leakage. The cover shall not leak or separate at the seam when tested as specified.

3.7 Workmanship. The finished map case shall be thoroughly clean, well finished, free from gels, pinholes, holes, cracks and blisters, fish eyes, mottling, particles of foreign matter and undispersed raw material. Raw edges shall be free from nicks and cuts.

4 Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5 Product Conformance Provisions

5.1 Product Conformance. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics and requirements of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract

5.2 Visual Examination. Case lots shall be inspected in accordance with Sampling Procedures and Tables for Inspection by Attributes, ANSI/ASQC Zl.4, published by the American Society for Quality Control. The cases shall be examined for the defects listed below.

5.2.1 Defects. The case shall be examined for the following defects: not uniformly colorless and clear; not dull matte finish; objectionable odor; any blister or fish eye or unfused resin particles; seam not continuous, not uniform; poor heat seal resulting in inadequate fusion; corners not rounded; any hole, crack, wrinkle, tear, sharp crease or cut; any spot, stain, or other discoloration which requires a cleaning agent for removal; not clean, evidence of dirt, grit, oil, or other foreign matter on or in map case; zipper does not work properly; any rough or sharp edge; label missing, incorrect, or illegible; not constructed as specified. Label/tag omitted or not readible by scanner; human readible interpretation (HRI) omitted or illegible; not visible on folded packaged item; or causes damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

5.2.2 Dimensional Examination. The finished case shall conform to the dimensions specified. Any dimension that is not within the established tolerance (+1 inch, -0 inch) shall be classified as a defect.

5.3 End Item Performance Testing. The end items shall be tested for odor, label adhesion, seam strength, crease strength and leakage.

5.3.1 Requirement for Odor . Determination of odor shall be made on samples freely exposed to circulating air at 75 degrees F +/- 5 degrees F (24 degrees C +/- 3 degrees C) for not less than 24 hours.

5.3.2 Requirement for label adhesion. Each case shall have a label that is directly printed, stamped or stenciled on the case. The contents, size and characters of the inscription, and the format shall be as follows;

ITEM DESCRIPTION
- minimum of 18 points (approximately ¼ inch)

CONTRACT NUMBER
- minimum of 18 points (approximately ¼ inch)

STOCK NUMBER
- minimum of 18 points (approximately ¼ inch)

SIZE
- minimum of 18 points (approximately ¼ inch)

CONTRACTOR'S NAME (bottom of label)
- maximum of 18 points (approximately ¼ inch

5.3.3. Seam Strength Requirement. Each specimen shall be cut 1 inch by 6 inches with the seam approximately in the middle and parallel to the short sides of the specimen. If the average breaking strength for any sample unit falls to meet the requirements specified, the lot shall be rejected.

5.3.4. Requirement for Leakage. The case shall not leak or separate at the seam when tested as specified.

5.3.5 Odor test. Determination of odor shall be made on samples freely exposed to circulating air at 75 degrees F +/- 5 degrees F (24 degrees C +/- 3 degrees C) for not less than 24 hours.

5.3.6 Ink adhesion label test. The ink adhesion shall be determined in accordance with ASTM F 1842 except that the test shall be performed on the label of a finished case. The test area of the label shall be visually examined for legibility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

5.3.7 Seam strength test. The breaking strength of the heat sealed seams shall be not less than 16 pounds when tested in accordance with Method A of ASTM D 882. Each specimen shall be cut 1 inch by 6 inches from a finished case with the seam approximately in the middle and parallel to the short sides of the specimen. The gage marks need not be applied and the elongation need not be measured. The initial separation between the grips of the apparatus shall be 2 inches and the specimen shall be placed in grips with the seam equidistant between the grips. The strength of the seam reported in pounds to the nearest 0.1 pound shall be the average of 5 determinations per sample unit.

5.3.8 Leakage Test. The case shall be marked 5 inches from the inside of the seam and filled with water to the mark. The temperature of the water shall be 73.5 +/- 2 degrees F. The case shall then be suspended over a dry receptacle for a period of 3 hours. At the end of the 3 hour period, the case shall be examined for seam separation and leakage of the water into the receptacle.

6.0 Packaging.

Preservation, Packaging and Marking. Cases of one size only shall be packed in accordance with ASTM D 3951 except that twenty (20) size 1 or ten (10) size 2 cases in each container.

7. Notes.

Sources of Non-government Documents

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

ASTM D 882 - Tensile Properties of Thin Plastic Sheeting
ASTM D 1593 – Standard Specification for Non-rigid Vinyl Chloride Plastic Film and Sheeting
ASTM-D 3951 - Standard Practice for Commercial Packaging
ASTM F 1842 – Standard Test Method for Determining Ink or Coating Adhesion on Plastic Substrate for Membrane Switch Applications

(Applications for copies should be addressed to American Society For Testing and Materials, 100Barr Harbor Drive, West Conshohocken, PA 19428)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Custodians:
Army-GL
Navy-MC

Civil Agency Coordinating Activity:
GSA – FSS

Preparing Activity:
DLA - CT

Project No. 8460-0098

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

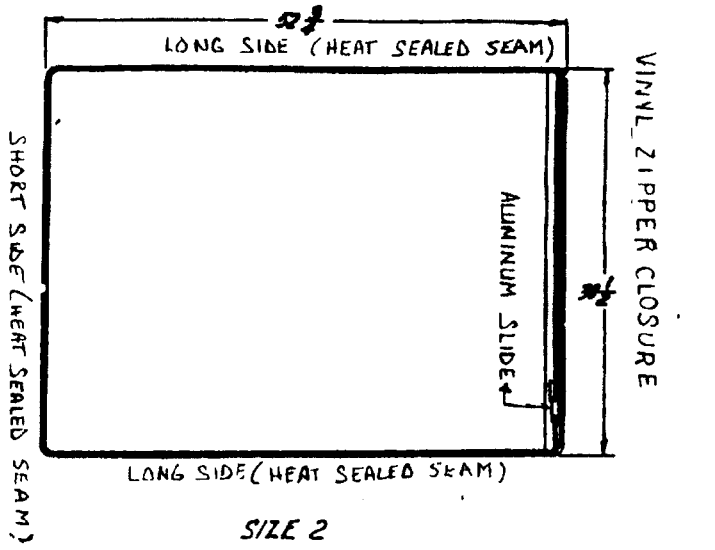

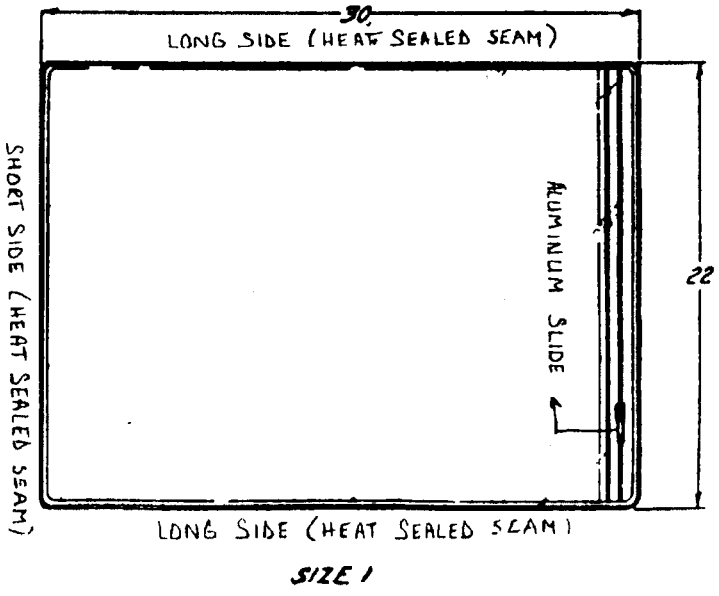

Figure 1 - Case, Map

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.