INCH-POUND

A-A-55199
May 20, 1993

COMMERCIAL ITEM DESCRIPTION

NECKTIE

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-N-41804.

Abstract. This Commercial Item Description covers the requirements for polyester/wool neckties intended for wear by male military personnel of the Department of Defense.

Classification. The neckties shall be one type in the following classes:

Class 3	-	Khaki 2122	(Marine Corps)
Class 4	-	Blue 1083	(Air Force and Coast Guard)
Class 5	-	Black 439	(Army and Navy)

Salient Characteristics. The necktie shall be a two-fold, four-in-hand design, with pointed ends, machine sewn center seam, interlinings, a retainer loop and ends faced with basic material (see Figure 1). Neckties may be cut in 2 pieces, with pieces matching each other. The piecing shall be not less than 17 inches nor more than 28 inches from the small end of the tie.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

The retainer loop shall be fused at the ends prior to assembly, and shall finish on the underside of necktie, centered horizontally with a ± 1/8 inch tolerance and 8 ± 1/4 inches from bottom point of wide end of necktie. The retainer loop shall have sufficient fullness to accommodate the narrow end of the necktie with no twists or puckers.

The identification label shall be positioned to wide end of interlining, 1/4 to 3/8 inch from bottom edge, and stitched on all four sides. The wide end of the interlining shall extend from 3-1/2 to 4 inches from finished point of wide end of necktie. The 3/4 inch wide strip of interlining shall be centered on center seam of necktie, and 1-3/8 inches from bottom of wide end of interlining. The interlinings shall be free for a distance of 2 to 2-1/2 inches at the wide end of necktie. The finished necktie shall be pressed, with the center seam centered, and without any seam impression or gloss.

Material. The basic material for the neckties shall be polyester and wool tropical blend cloth conforming to the following requirements:

Characteristic	Requirement	Test Method
Class 3		
Weave	plain	visual 2/
Weight (oz./linear yd., 56 inches basis min.)	6.5	ASTM D 3776
Yarns per inch (min.)	65 warp, 59 filling	ASTM D 3775
Breaking strength (lbs.)(min.)	100 warp, 80 filling	ASTM D 5034
Shrinkage (%)(max.)	2.5 warp, 2.5 filling	AATCC 99
Fiber content	75% ± 5% polyester, 25% ± 5% wool	1/
Classes 4 and 5		
Weave	plain	visual 2/
Weight (oz./linear yd., 56 inches basis min.)	7.5	ASTM D 3776
Yarns per inch (min.)	55 warp, 48 filling	ASTM D 3775
Breaking strength (lbs.)(min.)	70 warp, 65 filling	ASTM D 5034
Shrinkage (%)(max.)	4.0 warp, 3.0 filling	AATCC 99
Fiber content	55% ± 5% polyester, 40% wool	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement	Test Method
Alternate		
Weave	plain	visual 2/
Weight (oz./linear yd., 60 inches basis min.)	8.5	ASTM D 3776
Yarns per inch (min.)	56 warp, 46 filling	ASTM D 3775
Breaking strength (lbs.)(min.)	120 warp, 110 filling	ASTM D 5034
Shrinkage (%)(max.)	2 warp, 2 filling	AATCC 99
Fiber content	68% polyester, 25% acrylic, 7% mohair	1/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ One determination shall be made of each sample unit and the results reported as "Pass" or "Fail".

Color. The color of the neckties shall be Khaki 2122 for Class 3, Blue 1083 for Class 4, and Black 439 for Class 5 neckties. The color of the basic material shall match the standard sample when viewed under a filtered tungsten lamp that approximates artificial daylight, has a correlated color temperature of 7500 ± 200 Kelvin, with illumination of 100 ± 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2800 ± 200 Kelvin. The finished cloth shall meet the following characteristics:

Characteristic	Requirement	Test Method
Colorfastness to:		
Light	"Good"	AATCC 16
Laundering	"Good"	AATCC 61
Perspiration	"Good"	AATCC 15
Crocking	"Good"	AATCC 8
Wet Drycleaning	"Good"	AATCC 132

Interlining. The interlining for the neckties shall be a crease resistant, natural color, polyester/acrylic/wool cloth, and shall conform to the following requirements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement	Test Method
Weave	plain	2/
Weight	6.0 ounces (min.) per square yard	ASTM D 3776
Yarns per inch (min.)	warp 26, filling 26	ASTM D 3775
Crease resistant	warp and filling 78% (min.)	3/
Fiber content	10% (min.) wool, 50% ± 5% polyester, with remaining percentage acrylic	1/
Fiber content (alternate)	70% ± 5% polyester, 5% (min.) wool, remaining percentage acrylic	1/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ One determination shall be made on each sample unit and the results reported as "Pass" or "Fail".

3/ Federal Test Standard 191 Test Method 5212.

Thread. The thread for all classes of neckties shall be cotton, Ticket No. A, Tex 50, 3 ply conforming to type III of A-A-52094. As an alternate, cotton-covered polyester thread, Ticket No. 50, Tex 36-45, 2 ply, conforming to type I of A-A-50199 may be used. If automatic tie folding and sewing machine is used, the thread used shall be 100% polyester with continuous multifilament, twisted soft multiple cord, normal elongation, and a non-wicking finish, Tex 70, 3 ply, with a breaking strength of 8.0 lbs., when tested as specified in Test Method ASTM D-1578 (5 determinations shall be made per sample).

The polyester thread shall show a minimum of Class 4 color fastness to wet-dry cleaning when tested as specified in Test Method AATCC 132. The color of the thread for the neckties shall be Khaki P-1 (C. A. 66019) for class 3, Blue M (C. A. 66027) for class 4, and Black AA (C. A. 66043) for class 5.

Tape. The tape for the retainer loop shall be a 3/4 (± 1/32) inch wide plain weave of bright, high tenacity, light and heat resistant polyamide nylon yarn. The weight shall be 0.20 oz./linear yd. when tested as specified in Test Method ASTM D-3776, Option C, and the thickness shall be .015 - .025 inch when tested as specified in Test Method ASTM D-1777.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Label/marking. Each necktie shall have a combination identification and size label for neckwear. The marking medium may be either direct printing, stamping, or stenciling, except size shall not apply. The label shall show colorfastness to dry cleaning in accordance with AATCC Test Method 132. Barcoding of each unit shall be as specified by the procuring activity.

Patterns. The government shall furnish a pattern. The pattern generally provides for a 1/4 inch seam allowance for points and a 3/8 inch seam allowance for the center seam. The government patterns shall not be altered in any way. The working patterns may be modified to accommodate automation; however, if the working patterns are modified, the design and measurements must be maintained as intended by government patterns. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Measurements. The finished neckties shall conform to the measurements cited in Figure 1.

Workmanship. The finished neckties shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Necktie lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The necktie shall be examined for the defects listed below. The lot size shall be expressed in units of neckties. The sample unit is one necktie. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 0.65.

Defects. The necktie shall be examined for the following defects: any hole, cut, tear, needle chew or weakening defect in the material; color not as specified; any spot or stain (outside); thread ends not removed; tape having any holes, tears, cuts, or frayed edges; interlining and interlining strip missing, pleated, puckered, or not laying flat; retainer loop missing, twisted or puckered; pointed ends poorly shaped, or twisted, affecting appearance; not cut or fabricated in accordance with product demonstration model; label missing, incorrect, or illegible; measurement of item not as specified; and any variance not otherwise classified herein but at a variance with the product demonstration model.

Dimensional Examination. The finished necktie shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one necktie; the inspection level shall be S-3, and the AQL, expressed in terms of defects per hundred units, shall be 1.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

PACKAGING.

Overseas.

Packaging. Each necktie shall be folded.

Packing. Two hundred and twenty-five neckties shall be packed in a fiberboard box conforming to style RSC-L, grade 275 of PPP-B-636. The inside dimensions of the box shall be approximately 23-1/2 inches in length, 15-1/2 inches in width, and 6-1/2 inches in depth. The box shall be closed in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be loaded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. The pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Domestic.

Packaging, packing, palletization and marking. Packaging, packing, palletization, and marking shall be in accordance with ASTM D 3951.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

AATCC Test Methods

(Applications for copies should be addressed to the AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, NC 27709-2215.)

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL
Navy - NU
Air Force - 11

Review Activities:
Army - MD
Navy - MC
Air Force - 82, 99


User Activity:
Air Force - 45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8440-0206

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

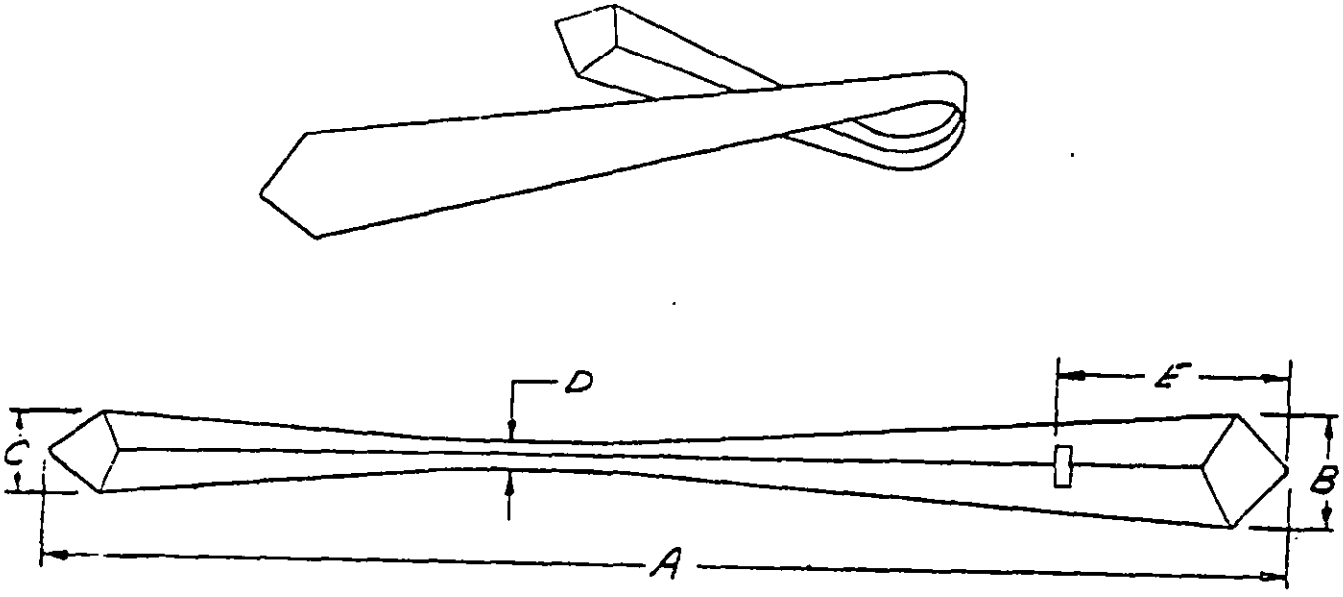

DIMENSIONS IN INCHES

CLASS SIZE	A		B	C	D	E
	MIN.	MAX.				
3, 4, 5 (ARMY ONLY)	56	57-1/2	3-1/8	1-1/2	1-1/8	8
5 (NAVY ONLY) REG	55	57	3-1/8	1-1/2	1-1/8	8
EXTRA-LONG	59	61	3-1/8	1-1/2	1-1/8	10
	TOLERANCE		± 1/8	± 1/8	± 1/8	± 1/4

FIGURE 1 - NECKTIE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. *The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.*
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55199	93-05-20

3. DOCUMENT TITLE
NECKTIE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial	(2) AUTOVON
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.