MILITARY SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, PLUG-IN,
SWITCH MODULE FOR, 2PDT, 4PDT

This specification is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-22885.

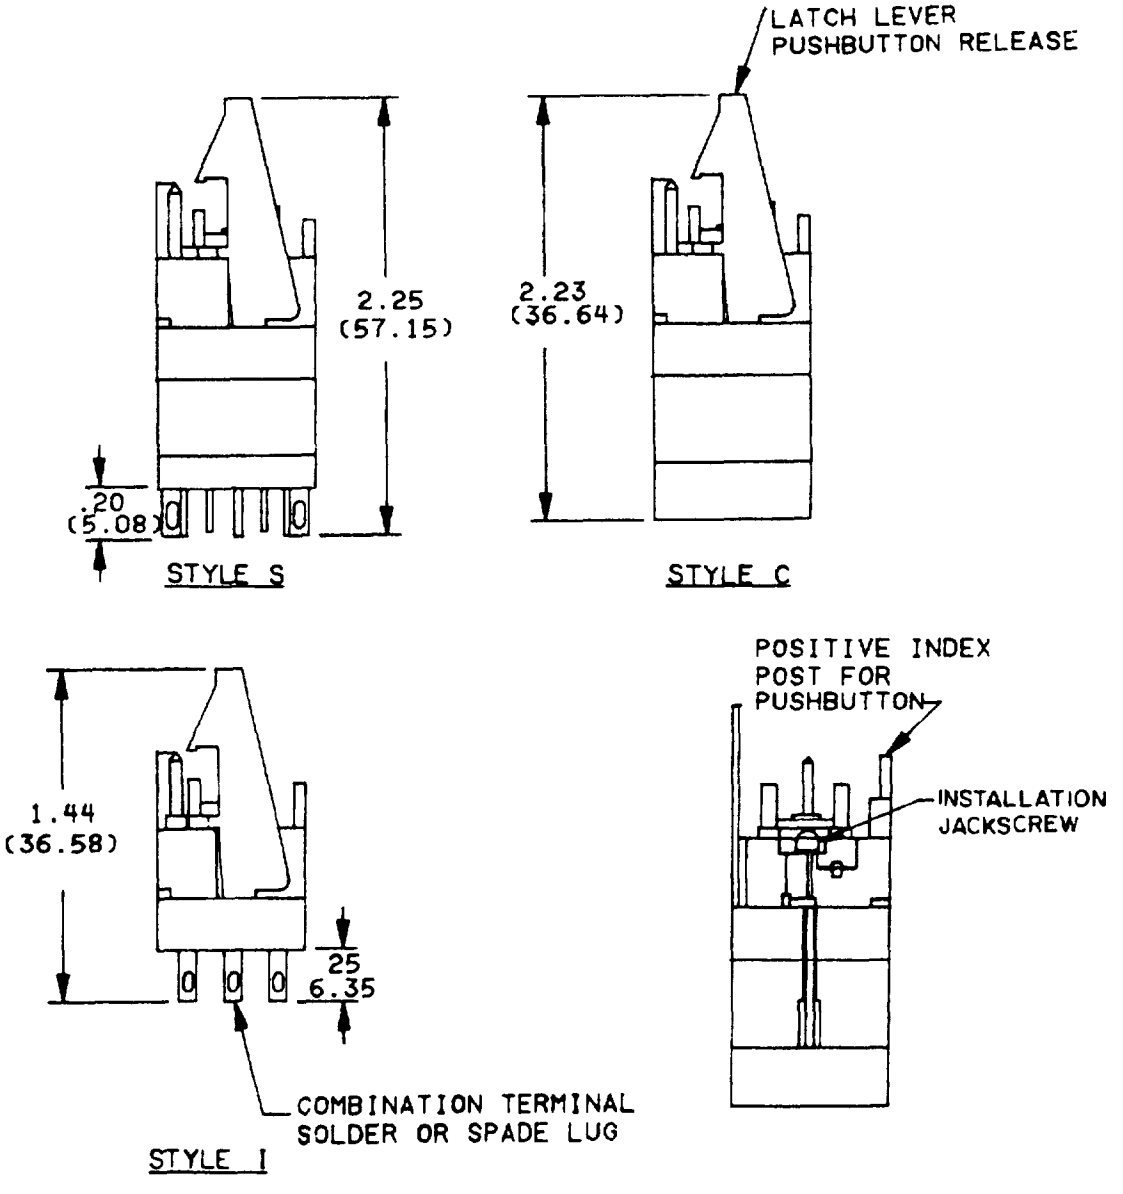


FIGURE 1. Dimensions and configurations

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.



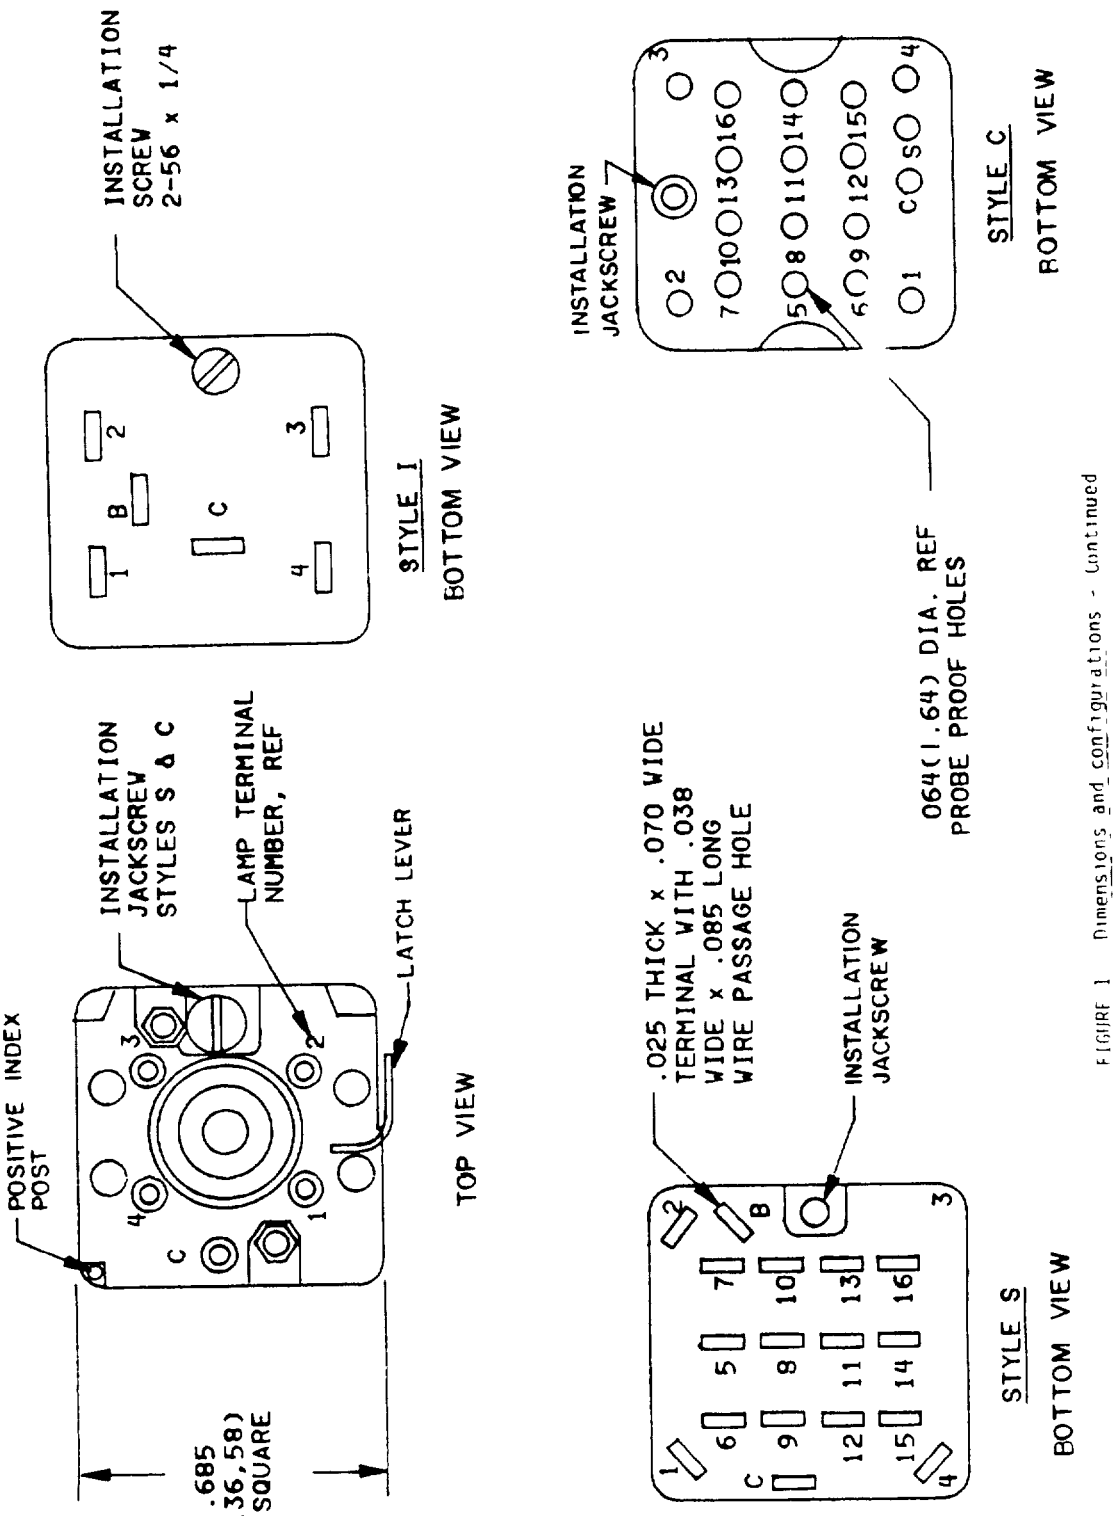


FIGURE 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

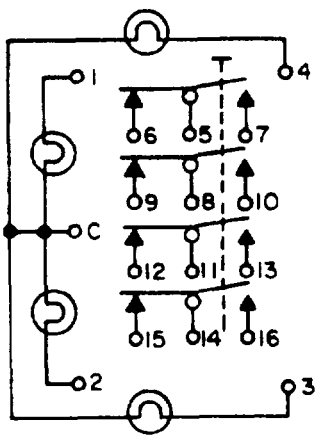

COMMON LAMP GROUND

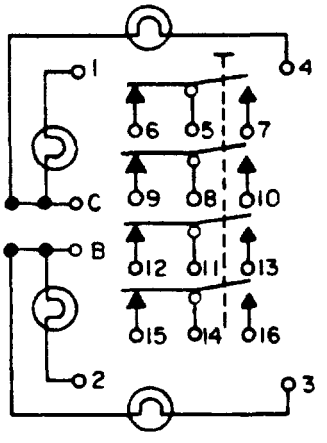

SPLIT LAMP GROUND

NOTES
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ± .015 (.38 mm) for three place decimals and ± .03 (.76 mm) for two place decimals.
3. Index post provided prevents incorrect insertion of pushbutton into switch housing.
4. The installation torque for switch mounting jackscrew to be 8 ounce-inches maximum.
5. Delete terminals 8 thru 13 for 2PDT configuration.
6. Delete terminals 5 thru 16 for indicator configuration.
7. Delete Terminal B for common lamp ground lamp circuit.
8. On momentary operation switches, Terminals 6, 9, 12 and 15 are normally closed.
9. Unit is built with only the required terminals.
10. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figure 1

Lit [illegible] states with sunlight readable pushbutton in accordance with MIL-S-22885/104 Styles C and S mate with individual or multistation switch housings in accordance with MIL-S-22885/103 and MIL-S-24317/12 Style I module, mount in MIL-S-24317/12 multistation housings only Styles S and C are designed to be replaced from front of panel without disconnecting behind the panel wiring; style I requires access to behind the panel mounting screw and removal of wiring; style C terminals mate with 133029/1-101 connector contacts.

Classification

Enclosure design 1 (Unsealed)

Temperature characteristic 1(-55°C to +85°C)

Vibration grade 3 10 - [illegible] 42, 15 g peak)

Operation

Y (Momentary action)

W (Alternate action)

H (Indicator only)

Material

Common termination system (applicable to style C)

Lamp circuit contacts Copper alloy, nickel plated .0001 inch thick per QQ-N-290, class 2.

Switch circuit contacts Copper alloy, gold plated per MIL-G-45204, Type II, Grade C, Class 1, over nickel plate, .000050 inch thick

Weight (±10)

Style I .0176 pound

Styles C and S .032 pound

Operating characteristics In accordance with MIL-S-22885/103 and MIL-S-24317/12

Electrical endurance 25,000 cycles. See table I for test loads

TABLE I Electrical ratings

Load	Sea level and 70,000 ft	
	28 V dc	115 V ac
Resistive	2 Amperes	2 Amperes
Inductive	1 Ampere	1 Ampere
Lamp	75 Ampere	75 Ampere

Dielectric withstanding voltage

Sea level 1,056 V rms
70,000 ft 450 V rms

Low level life Applicable

Terminal identification Circuit schematic shall be marked Identification of terminals on style C modules not required

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

Part number See table II

Qualification and periodic inspection Required as a part of MIL-S-22895/103 or MIL-S-24317/12 switch assemblies.

TABLE III Part numbers

Part number 22895/105-	Style	Termination 1/	Operation	Switch circuit	Lamp CKT 2/
001	I	Solder	Indicator	N/A	CLG
002	I	"	"	"	SLG
003	S	Solder or wire wrap	"	"	CLG
004	S	Solder or wire wrap	"	"	SLG
005	C	Crimp pin	"	"	CLG
006	C	Crimp pin	"	"	SLG
007	S	Solder or wire wrap	Momentary	4PDT	CLG
008	"	"	"	4PDT	SLG
009	"	"	"	2PDT	CLG
010	"	"	"	2PDT	SLG
011	"	"	Alternate	4PDT	CLG
012	"	"	"	4PDT	SLG
013	"	"	"	2PDT	CLG
014	"	"	"	2PDT	SLG
015	C	Crimp pin	Momentary	4PDT	CLG
016	"	"	"	4PDT	SLG
017	"	"	"	2PDT	CLG
018	"	"	"	2PDT	SLG
019	"	"	Alternate	4PDT	CLG
020	"	"	"	4PDT	SLG
021	"	"	"	2PDT	CLG
022	"	"	"	2PDT	SLG

1/ Style I modules mount in style I multistation housings in accordance with MIL-S-24317/12. Style S modules mate with styles S, W or L individual or multistation housings in accordance with MIL-S-22895/103 and MIL-S-24317/12 Style C modules mate with style C individual or multistation housings in accordance with MIL-S-22895/103 and MIL-S-24317/12.

2/ CLG = Common lamp ground.
SLG = Split lamp ground

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5930-N574-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.