INCH-POUND
MIL-PRF-22885/105B
2 April 2004
SUPERSEDING
MIL-PRF-22885/105A
17 March 1999

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, PLUG-IN, SWITCH MODULE FOR, 2PDT, 4PDT

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification sheet and MIL-PRF-22885.

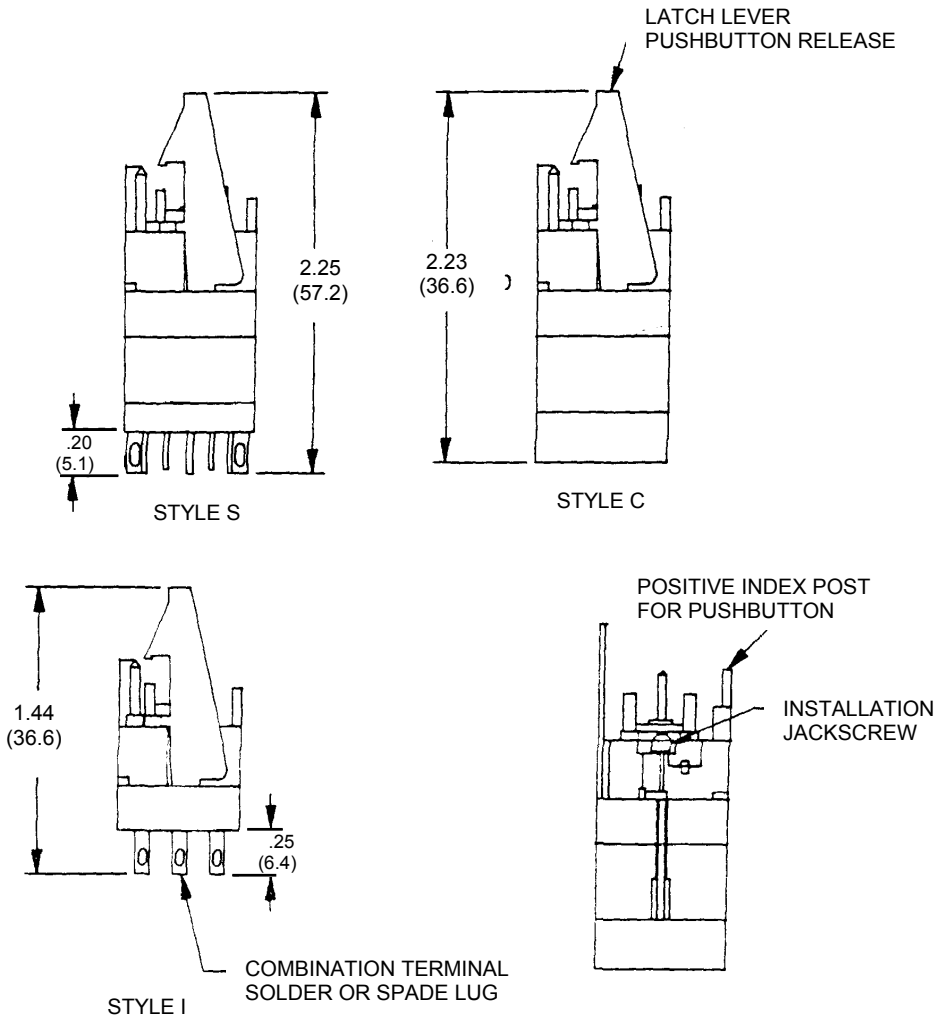


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.



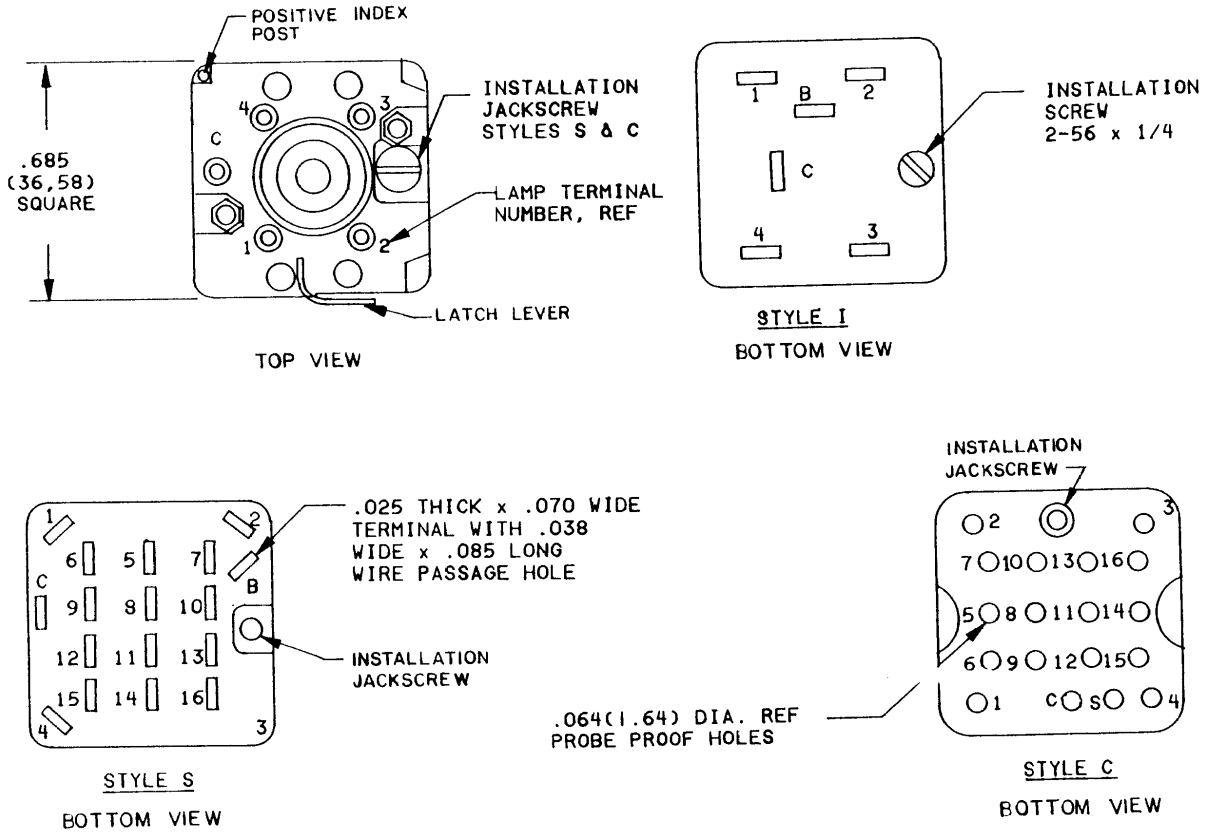


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

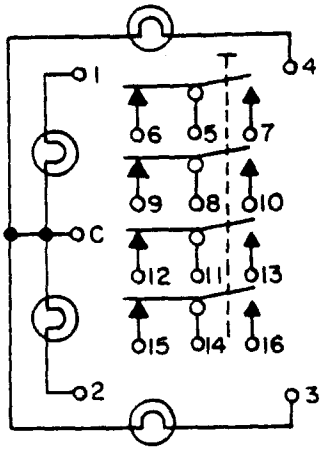

COMMON LAMP GROUND

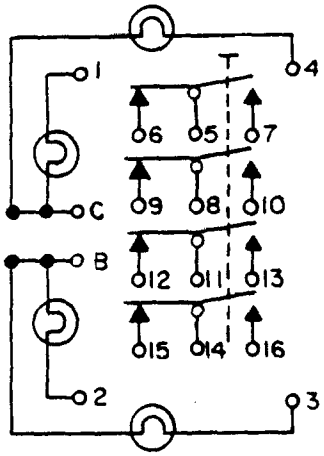

SPLIT LAMP GROUND

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.015 (.38 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.
3. Index post provided prevents incorrect insertion of pushbutton into switch housing.
4. The installation torque for switch mounting jackscrew to be 8 ounce-inches maximum..
5. Delete Terminals 8 thru 13 for 2PDT configuration.
6. Delete Terminals 5 thru 16 for indicator configuration.
7. Delete Terminal B for common lamp ground lamp circuit.
8. On momentary operation switches, Terminals 6, 9, 12 and 15 are normally closed.
9. Unit is built with only the required terminals.
10. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Design and construction: See figure 1.

Intended use: Mates with sunlight readable pushbutton in accordance with MIL-PRF-22885/104. Styles S and C mate with individual or multistation switch housings in accordance with MIL-PRF-22885/103 and MIL-S-24317/12. Style I modules mount in MIL-S-24317/12 multistation housings only. Styles S and C are designed to be replaced from front of panel without disconnecting behind the panel wiring. Style I requires access to behind the panel mounting screw and removal of wiring. Style C terminals mate with M39029/1-101 connector contacts.

Classification:

Enclosure design: 1 (Unsealed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

Temperature characteristic: 1(-55°C to +85°C).

Vibration grade: 3(10 - 2,000 Hz, 15 g peak).

Operation:

A (Momentary action).

B (Alternate action).

H (Indicator only).

Material:

Common termination system (applicable to style C):

Weight (±10%):

Style I: .0176 pound.

Styles C and S: .032 pound.

Operating characteristics: In accordance with MIL-PRF-22885/103 and MIL-S-24317/12.

Electrical endurance: 25,000 cycles. See table I for test loads.

TABLE I. Electrical ratings.

Load	Sea level and 70,000 ft.	
	28 V dc	115 V ac
Resistive Inductive Lamp	2 Amperes 1 Ampere .75 Ampere	2 Amperes 1 Ampere .75 Ampere

Dielectric withstanding voltage:

Sea level: 1,056 V rms.
70,000 ft: 450 V rms.

Logic level life: Applicable.

Terminal identification: Circuit schematic shall be marked. Identification of terminals on style C modules not required.

Part number: See table II.

Qualification and periodic inspection: Required as a part of MIL-PRF-22885/103 or MIL-S-24317/12 switch assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.

TABLE III. Part numbers.

Part number M22885/105-	Style	Termination 1/	Operation	Switch circuit	Lamp CKT 2/
001	I	Solder	Indicator	N/A	CLG
002	I	Solder	Indicator	N/A	SLG
003	S	Solder or wire wrap	Indicator	N/A	CLG
004	S	Solder or wire wrap	Indicator	N/A	SLG
005	C	Crimp pin	Indicator	N/A	CLG
006	C	Crimp pin	Indicator	N/A	SLG
007	S	Solder or wire wrap	Momentary	4PDT	CLG
008	S	Solder or wire wrap	Momentary	4PDT	SLG
009	S	Solder or wire wrap	Momentary	2PDT	CLG
010	S	Solder or wire wrap	Momentary	2PDT	SLG
011	S	Solder or wire wrap	Alternate	4PDT	CLG
012	S	Solder or wire wrap	Alternate	4PDT	SLG
013	S	Solder or wire wrap	Alternate	2PDT	CLG
014	S	Solder or wire wrap	Alternate	2PDT	SLG
015	C	Crimp pin	Momentary	4PDT	CLG
016	C	Crimp pin	Momentary	4PDT	SLG
017	C	Crimp pin	Momentary	2PDT	CLG
018	C	Crimp pin	Momentary	2PDT	SLG
019	C	Crimp pin	Alternate	4PDT	CLG
020	C	Crimp pin	Alternate	4PDT	SLG
021	C	Crimp pin	Alternate	2PDT	CLG
022	C	Crimp pin	Alternate	2PDT	SLG

1/ Style I modules mount in style I multistation housings in accordance with MIL-24317/12. Style S modules mate with styles S, W or L individual or multistation housings in accordance with MIL-PRF-22885/103 and MIL-S-24317/12. Style C modules mate with style C individual or multistation housings in accordance with MIL-PRF-22885/103 and MIL-S-24317/12.
2/ CLG = Common lamp ground. SLG = Split lamp ground.

Reference Documents:
MIL-PRF-22885
MIL-PRF-22885/103
MIL-PRF-22885/104
MIL-S-24317/12

Custodian:
Navy - EC
DLA-CC

Preparing activity:
DLA - CC

(Project 5930-1803)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:35Z
Check the source to verify that this is the current version before use.