NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-22885/111(EC)
AMENDMENT 2
1 July 1997
SUPERSEDING
AMENDMENT 1
10 May 1996

PERFORMANCE SPECIFICATION SHEET

SWITCHES, PUSHBUTTON, LIGHT EMITTING DIODE (LED) ILLUMINATED, STANDARD, NIGHT VISION IMAGING SYSTEM (NVIS) AND SUNLIGHT READABLE DISPLAYS, SPDT AND DPDT, LOW LEVEL TO 7 AMPERES, SEALED AND UNSEALED, SOLDER AND COMMON TERMINATION SYSTEM (CTS) TERMINATIONS

This amendment forms a part of MIL-S-22885/111, dated 14 August 1992, and is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, side view: Delete dimension ".20".


* FIGURE 1, Type II-Dripproof, extended: Add panel seal on each side of panel spacer.

* FIGURE 1, Type II-Dripproof, extended: Delete dimension ".39", and substitute ".43".

PAGE 2

FIGURE 2, top view: Delete dimension ".90" and substitute ".98 MAX"; side view: Delete dimension ".43" and substitute ".39";

FIGURE 2, seal cross sectional view: Delete and substitute:

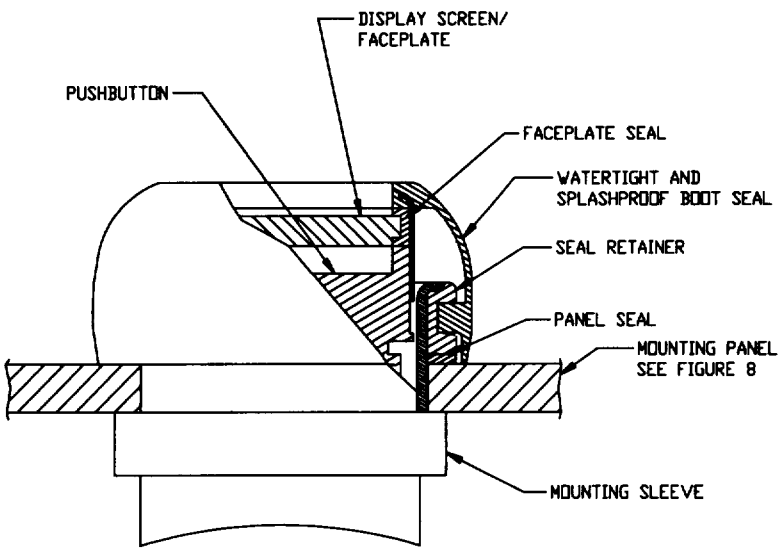

SEAL CROSS SECTIONAL VIEW

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:39Z
Check the source to verify that this is the current version before use.

PAGE 3

FIGURE 3, side view: Delete dimension ".20"; side view: Delete dimension "1.21" and substitute "1.59"; side view: Delete "MIL-C-39029/57-357" and substitute "M39029/16-168"; NOTE 7: Delete "M39029/57-357" and substitute "M39029/16-168".

* FIGURE 3, Type V-Dripproof, extended: Add panel seal on each side of panel spacer.

* FIGURE 3, Type V-Dripproof, extended: Delete dimension ".39", and substitute ".43".

PAGE 4

FIGURE 4, top view: Delete dimension ".90" and substitute ".98 MAX"; side view: Delete ".43" and substitute ".39"; side view: Delete "MIL-C-39029/57-357" and substitute "M39029/16-168"; seal cross sectional view: Delete and substitute the same view as shown for figure 2 above; NOTE 7: Delete "M39029/57-357" and substitute "M39029/16-168".

PAGE 9

FIGURE 9, socket contact, crimp type: Delete "MIL-C-39029/57-357" and substitute "M39029/16-168"; mounting cam: Delete "RECEPTACEL ASSYEMBLY" and substitute "RECEPTACLE ASSEMBLY".

PAGE 11

Operating characteristics:

Actuating force: Delete "Unsealed: 2 pounds ±1 pound", "Dripproof: 3 pounds ±1 pound", "Splashproof/watertight: 4 pounds ±1 pound" and substitute "5 pounds maximum".

Delete "Actuating travel: .125 inch maximum, 0.08 inch minimum" and substitute "Plunger travel: .130 ± .030".

Pushbutton removal force: Delete "2 to 4 pounds" and substitute "2 to 5 pounds. Not applicable to type III or type VI (sealed) switches."

Shock: Delete and substitute:

"Shock:

All switch types: Method I (75 g).

Switch types III and VI (sealed switches): High impact shock in accordance with MIL-S-901, grade A, class II (for deck-mounted equipment) when attached to the anvil plate of the shock machine by means of standard mounting fixture 11-C with simulated console, which provides resilient mounting typical of in-service use within "deck-mounted" electronic cabinets or panels. These units are not recommended for direct "hull mounted" applications."

Salt spray: Delete and substitute:

"Salt spray: Test condition A (96 hours)."

After sand and dust paragraph, add:

"Terminal strength:

Solder terminals, applied force and direction of force: 3 pounds perpendicular to the long axis, and 5 pounds parallel to the long axis."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:39Z
Check the source to verify that this is the current version before use.

PAGE 12

TABLE I: Delete and substitute:

"TABLE I. Illuminated color and luminance limits.

Color	Color code	Nominal peak wave length (nm)	Color limits 1/		Minimum average luminance (100% duty cycle) 2/
			x	y	
Red	RD	630	.668 .682 .705 .719	.304 .318 .267 .281	60 foot-Lamberts
Amber yellow	AY	585	.465 .479 .589 .603	.506 .520 .382 .396	70 foot-Lamberts
Lime green	LG	565	.324 .338 .499 .513	.644 .659 .472 .485	150 foot-Lamberts
Green	GR	555	.252 .266 .395 .409	.710 .724 .575 .589	45 foot-Lamberts
Orange	OR	610	.613 .627 .678 .692	.358 .372 .294 .308	70 foot-Lamberts
Ultra red	UR	660	.700 .714 .713 .733	.272 .286 .258 .267	400 foot-Lamberts
NVIS green B	JJ	553	In accordance with MIL-L-85762 3/		40 foot-Lamberts
NVIS yellow	KK	580			50 foot-Lamberts
NVIS red	LL	607			8 foot-Lamberts

1/ Corners of the x and y envelope limits from the CIE chromaticity diagram.
2/ With or without EMI/RFI shielding.
3/ Appropriate power modulation required to regulate LED illumination output."

PAGE 13

NVIS compatibility, NVIS red, first sentence: Delete "type II class A".

Marking, add: "Pushbuttons shall indicate the applicable nominal voltage (5 V or 28 V). LED printed circuit boards shall be blue for current sinking configurations and natural or green for current sourcing configurations. NVIS type and class marking are not required. The word "TOP" shall be marked on switch housings and pushbuttons, excluding splashproof/watertight sealed units, to indicate proper orientation."

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:39Z
Check the source to verify that this is the current version before use.

Qualification, group submission, after first sentence: Add "Captive pushbutton retainers are not required on assemblies used for qualification and retention testing."

TABLE X: Delete and substitute:

"TABLE X. Qualification inspection - group submission.

Test samples	Qualification inspection table of MIL-S-22885		Extent of approval
	Group	Number of samples	
M22885/111B213D	I II 1/ III VI 2/ VII	10 2 from group I 2 from group I 2 from group I 4 from group I	All PINs
M22885/111A812A	I 3/ II 1/ VII 4/	4 2 from group I 2 from group I	
M22885/111Y241K	I II 5/ 6/ III V 6/ VI 7/ VII 6/ 8/	12 4 from group I 2 from group I 2 from group I 2 from group I 2 from group I	
M22885/111B213D	VIII 9/	42 10/	

1/ Shock: Method I.
2/ Electrical endurance: Sea level, inductive dc load only.
3/ Test current and voltage for contact resistance and operating characteristics tests shall not exceed 10 mA and 30 mV dc on all gold plated contact switches subject to low level life test. Low level life contact resistance requirements apply.
4/ Mechanical endurance test not required.
5/ Shock: High impact shock in accordance with MIL-S-901, grade A, class II.
6/ Sealing shall be verified by the watertight and splashproof tests only.
7/ Electrical endurance: Sea level, resistive dc load only.
8/ Intermediate current test not required.
9/ NVIS color and radiance measurements shall be made, as applicable, during group VIII inspections.
10/ In combination with the test sample specified in the first column, 42 pushbutton display screen assemblies shall be tested: Two each of six colors for each standard display type, N and W; two each of two colors for display type S; and 2 each of three NVIS colors and four standard colors for display type H. One of the pushbutton samples for each color/display type combination shall have 5 volt LED's, and the other shall have 28 volt LED's. Test legend characters and display screen design shall be as follows:



Source: https://assist.dla.mil -- Downloaded: 202610-19T14:39Z
Check the source to verify that this is the current version before use.

PAGE 19

Application information, after U.L. listing: Add: "Recommended substitute for color white is LG. Best color separation is obtained with combinations of LG, OR, and UR; or with GR, AY, and RD."

Application information, Oil, fuel, and solvent resistance: Delete.

Category II product offerings: Add:

"Display screens with four-way splits are available.

Oil, fuel, and solvent resistant seals are available. (A listing of specific types of chemicals, recommended and not recommended, may be obtained from the switch manufacturer.)"

PAGE 20

TABLE XII, contrast ratios, minimum lighted, orange: Delete ".25" and substitute ".40"; amber yellow: Delete ".20" and substitute ".30"; red: Delete ".20" and substitute ".25"; green: Delete ".20" and substitute ".30".

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Navy - EC

Preparing activity:
DLA - CC

(Project 5930-N768)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:39Z
Check the source to verify that this is the current version before use.