MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,

PUSH BUTTONS FOR

(SNAP-IN AND SCREW-IN)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the push buttons described herein shall consist of this specification and the latest issue of MIL-S-22885.


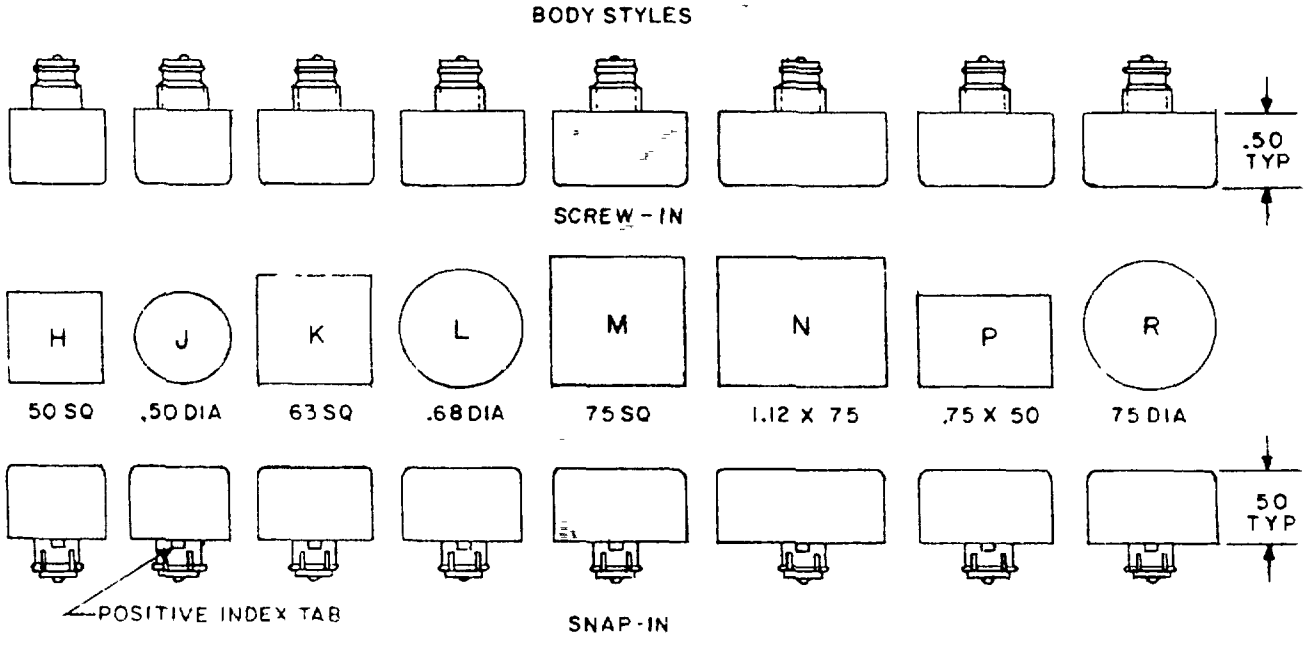


FIGURE 1 Push button body styles and mounting base configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

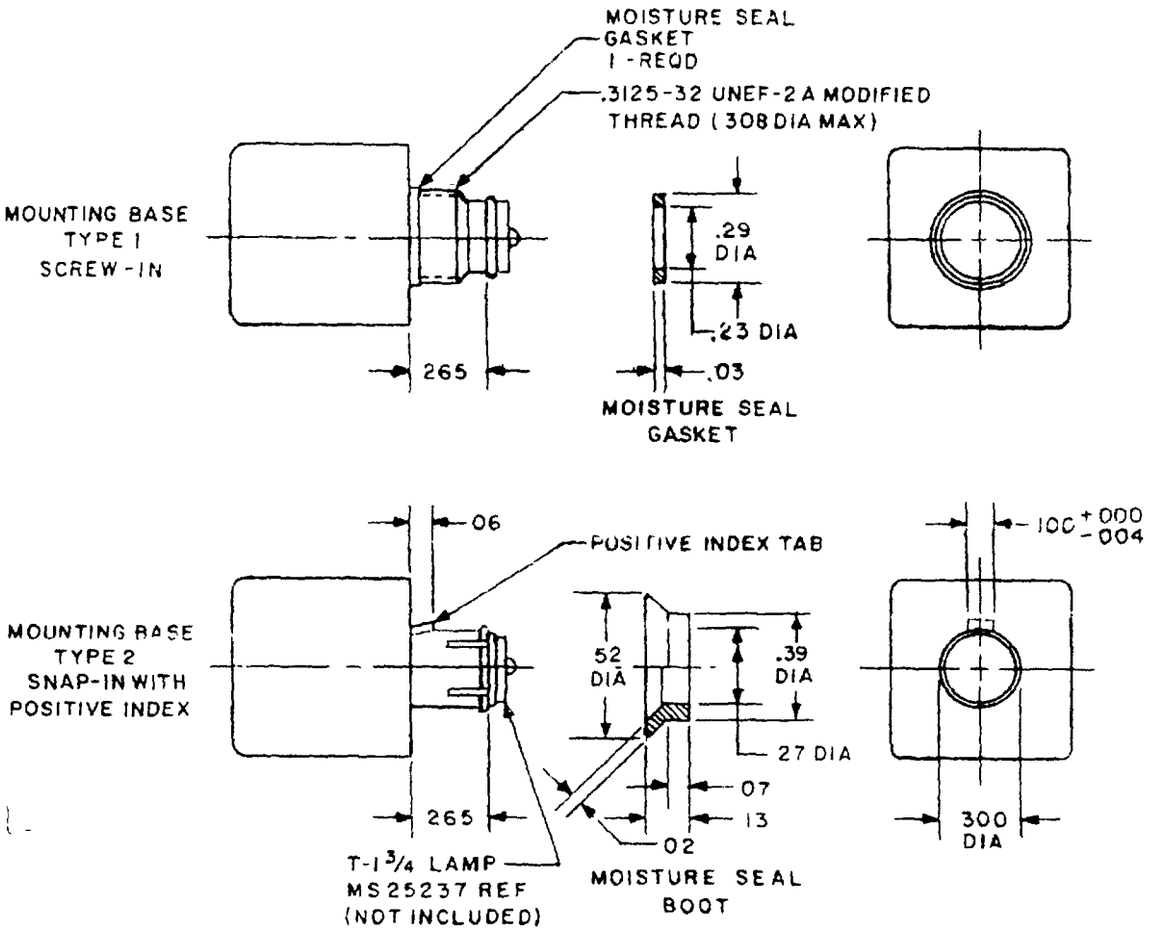

INCHES	MM	INCHES	MM
.004	.10	.29	7.4
.02	.5	.300	7.62
.03	.8	.308	7.82
.06	1.5	.39	9.9
.07	1.8	.50	12.7
.100	2.54	.52	13.2
.13	3.3	.63	16.0
.23	5.8	.68	17.3
.265	6.73	.75	19.0
.27	6.9	1.12	28.4

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three-place decimals and ±.02 (.51 mm) for two-place decimals.
4. The positive index tab configuration is optional. It shall engage the slots in the switch housing to prevent rotation.
5. Moisture seal furnished with push buttons.

FIGURE 1. Push button body styles and mounting base configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

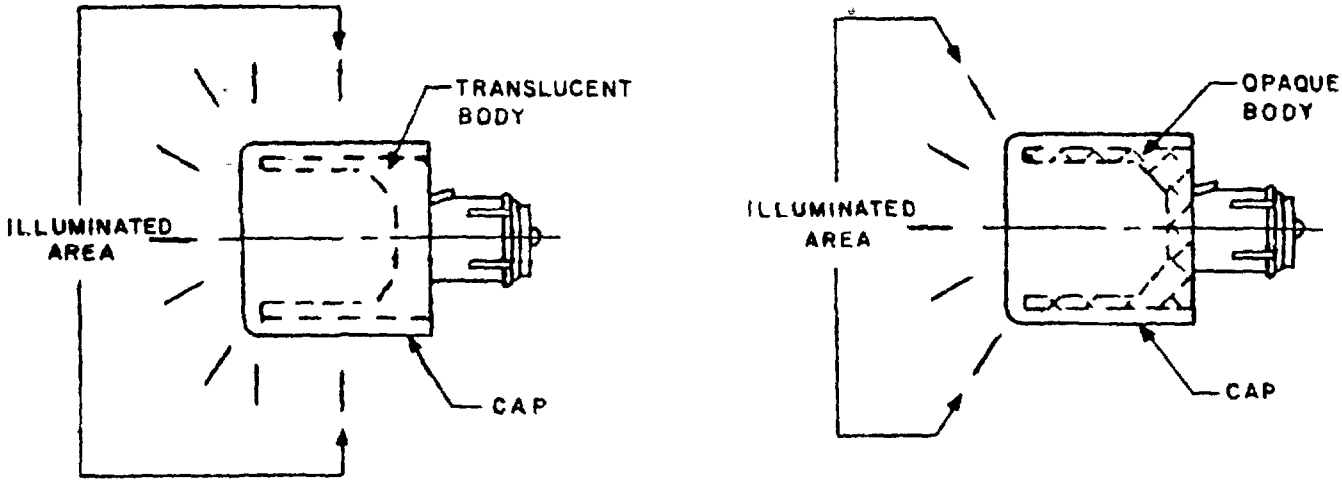


FIGURE 2. Illuminated area

REQUIREMENTS.

Dimensions and configurations: See figures 1 and 2, and table I.

Materials: L-P-393, MIL-P-46161, grade B, class 20, or L-P-380, class 2, type II.

Vibration: Grade 2 (10-500 Hz).

Thermal shock: 71°C maximum temperature (nonoperating).

Indexing: The positive index tab (type 2) shall withstand rotational torque up to 2-inch pounds in either direction without damage. Type 1 push buttons are orientable.

Photometric brightness and color: See table I.

Legend: See application information.

Part number: M22885/99-(dash number identifying the body style and mounting base (see figure 1) and color combinations of table I).

EXAMPLE.

M22885/99- K 2 14

Specification sheet number

Body style (see figure 1)

H = .50 sq
J = .50 dia
K = .63 sq
L = .68 dia
M = .75 sq
N = 1.12 x .75 rect
P = .75 x .50 rect
R = .75 dia

Mounting base (see figure 1)

1 = Screw-in
2 = Snap-in (positive index)

Color combinations (see table I)

01 thru 15 = Color numbers

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE I Configurations and characteristics.

Color number	Color combinations			Minimum photometric brightness	Color coordinates 1/	
	Cap	Translucent color filter	Body		x ±.01	y ±.01
				Footlamberts		
01	Red-translucent	None	White-translucent	105	.690	.309
02	Green-translucent	"	"	130	.211	.618
03	Yellow-translucent	"	"	255	.487	.406
04	Blue-translucent	"	"	9	.154	.221
05 2/	White-translucent	"	"	415	433	.413
06	"	Red	White-opaque	45	.697	.302
07	"	Green	"	30	196	.614
08	"	Yellow	"	160	.592	.402
09	"	Blue	"	4	174	.190
10	"	Blue-white	"	175	.419	.409
11	Clear-transparent	Red	Black-opaque	45	.695	.303
12	"	Green	"	55	.209	.621
13	"	Yellow	"	160	.580	.412
14	"	Blue	"	4	.173	.194
15	"	White	"	185	.499	.410

1/ The chromaticities of the diffusers or color filters are expressed as "x" and "y" coordinates on the CIE chromaticity diagram using a source illuminate of 2360 K

2/ Will accept type 5 engraved legend only (see application information).

QUALIFICATION INSPECTION

Qualification inspection is required as part of the illuminated push button switch covered by MIL-S-22885/18.


APPLICATION INFORMATION

Legend is not included when ordering push buttons by the military part number. Push buttons with legends are category II items and shall be acquired from a source listed on the qualified products list. Information on available legend types, legend construction, and character spacing is given in figure 3 and table II.

INTENDED USE

The push buttons shall be capable of mating with push button switches, part numbers M22885/18-01 through -08 and -149 through -156, of MIL-S-22885/18 The push buttons shall accommodate one midget-flange-base T-1-3/4 incandescent lamp. For provisioning purposes and spare parts support, the push buttons are not supplied with lamps

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

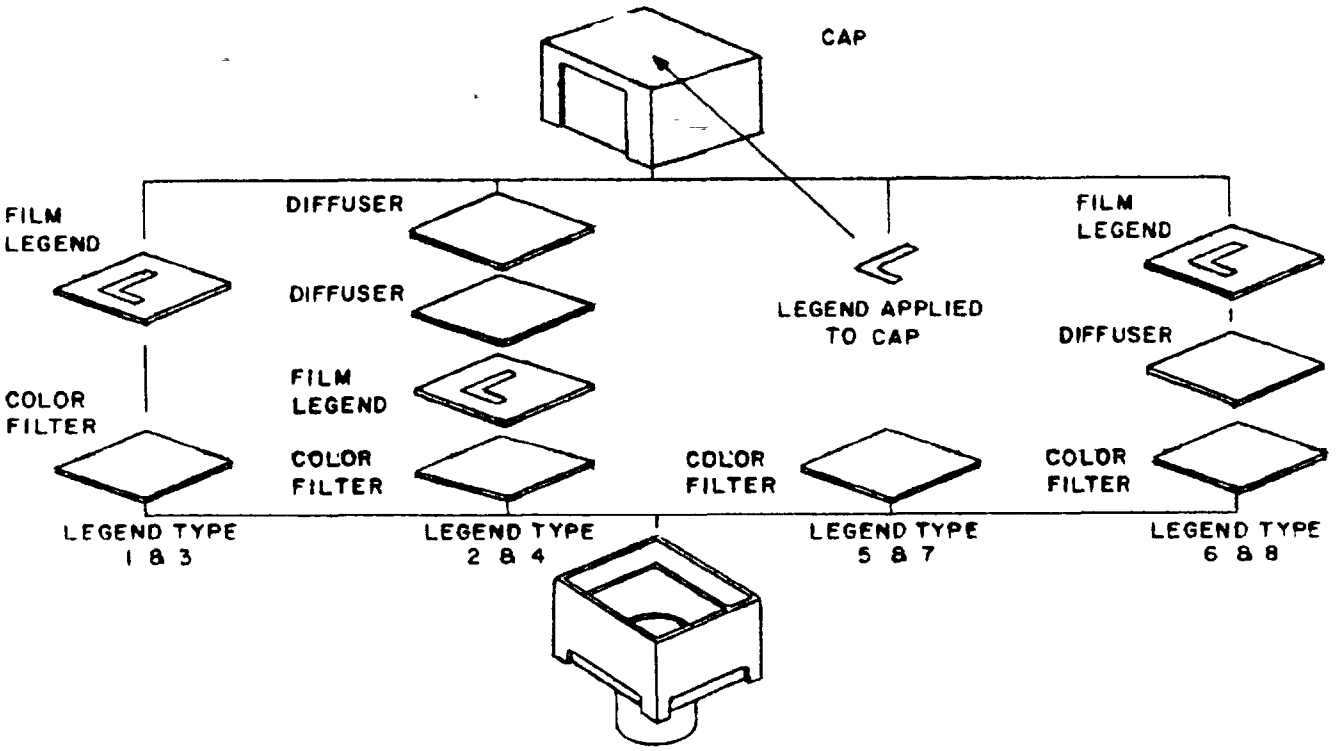

Legend type	Nonilluminated		Illuminated	
	Legend	Background	Legend	Background
1	Black (1)	Translucent white	Black	Color
2	Hidden (not easily discernible) (1)	Translucent white	Black	Color
3	Translucent color (1)	Black	Visible in color	Black
4	Hidden (not easily discernible) (1)	Translucent white	Visible in color	Opaque
5	Black filled engraving on external surface (2)	Translucent color cap	Black	Color
6	Translucent white (1)	Black	Visible	Black
7	White marking on external surface (3)	Matte black	Visible in color	Matte black
8	Black (1)	Translucent white	Black	Color

(1) = Film legend.

(2) = Engraved black fill on white, yellow, or amber background. White fill on all other colors.

(3) = Photo etch or equivalent.

FIGURE 3 Legend types and construction.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE II. Legend characters.

Maximum character count and number of lines per push button style and character size.

Push button body style (see fig. 1)	A = 10 point				B = 12 point				C = 18 point			
	No. char/line		No. lines		No. char/line		No. lines		No. char/line		No. lines	
	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film
H	4	5	2	2	3	4	1	1	2	3	1	1
J	4	5	2	2	3	4	1	1	2	3	1	1
K	5	7	2	2	4	6	2	2	3	4	2	2
L	5	8	2	2	4	6	2	2	3	4	1	1
M	6	9	4	4	5	7	3	3	3	5	2	2
N	9	11	4	4	7	9	3	3	5	6	2	2
P	6	9	2	2	5	7	1	1	3	5	1	1
R	6	8	3	3	5	7	2	2	3	5	1	1

Film legend = alternate gothic no. 2;
Engraved legend = condensed gorton.
Character height: A = 10 point (approx .10 inch (2.5 mm));
B = 12 point (approx .12 inch (3.05 mm)), C = 18 point (approx .18 inch (4.6 mm))



	Film legend	Engraved legend
Letter height to width ratio (letter T)- - -	1.66:1	2:1
Line width ratio $\frac{H}{b}$ - - - - - - - - - - -	6:1	8 1

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - OS
Air Force - 17, 99
DLA - ES

User activities
Navy - AS, MC, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-1190)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-S-22885/99

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.