INCH-POUND

MIL-PRF-22885/99A
17 MARCH 1999
SUPERSEDING
MIL-S-22885/99
1 December 1982

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED,

PUSH BUTTONS FOR

(SNAP-IN AND SCREW-IN)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the push buttons described herein shall consist of this specification sheet and MIL-PRF-22885.


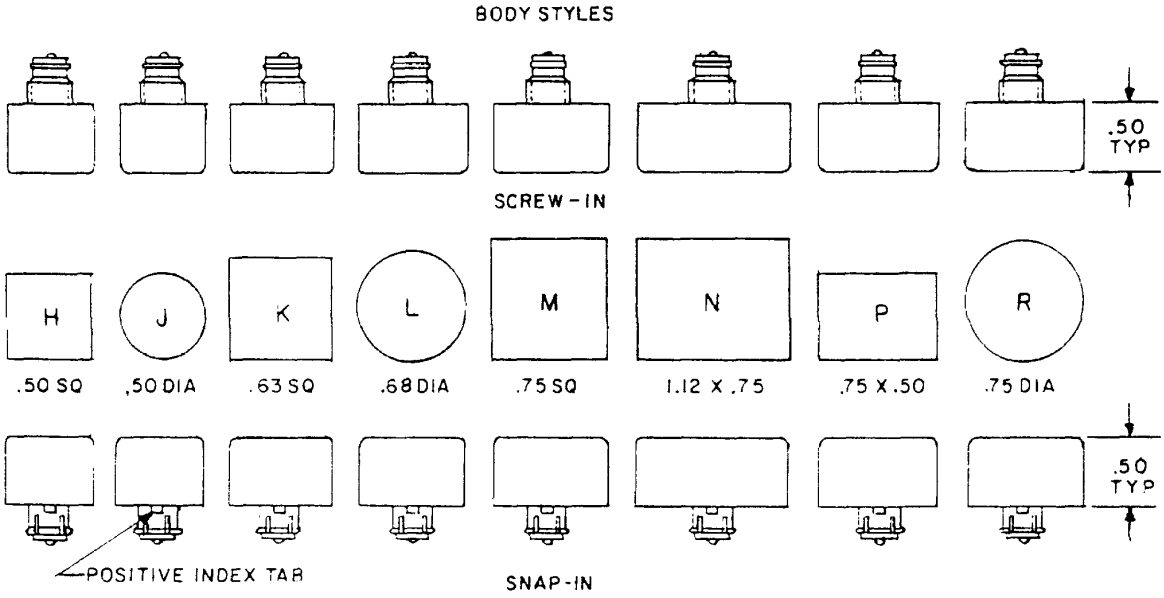


FIGURE 1. Push button body styles and mounting base configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

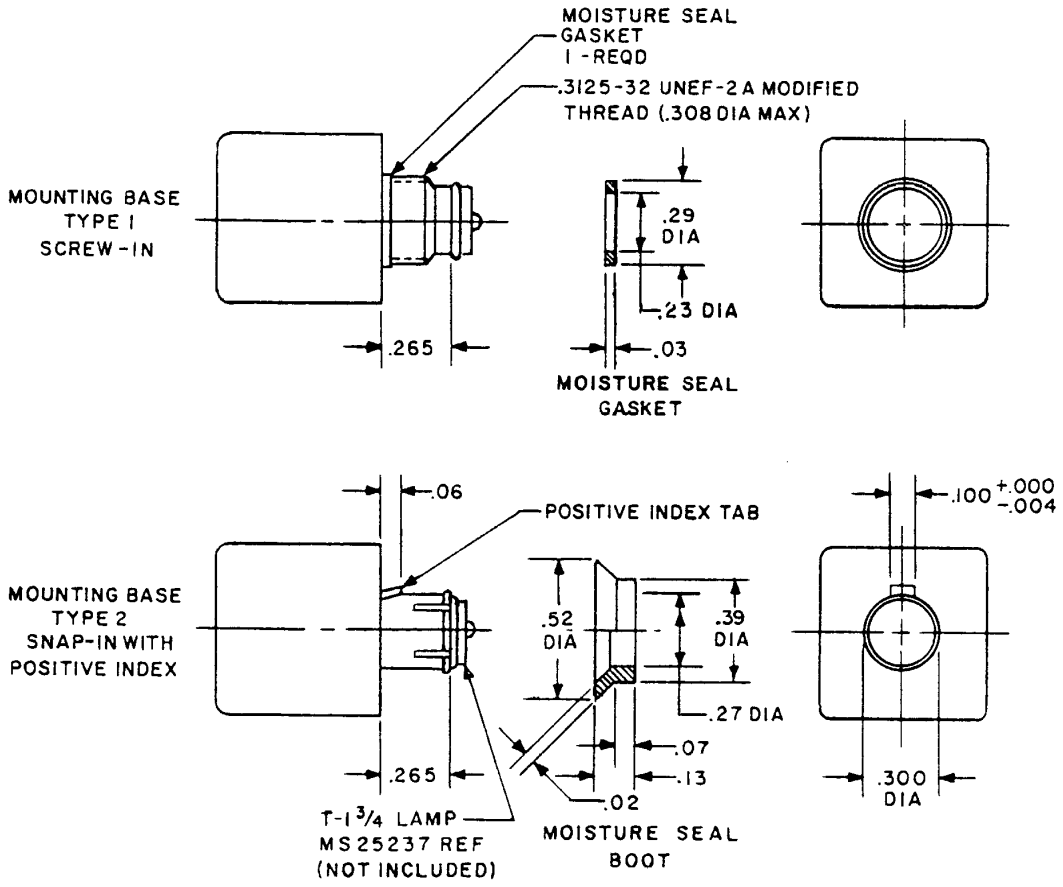

Inches	mm	Inches	mm
.004	.10	.29	7.4
.02	.5	.300	7.62
.03	.8	.308	7.82
.06	1.5	.39	9.9
.07	1.8	.50	12.7
.100	2.54	.52	13.2
.13	3.3	.63	16.0
.23	5.8	.68	17.3
.265	6.73	.75	19.0
.27	6.9	1.12	28.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.02 (.51 mm) for two-place decimals.
4. The positive index tab configuration is optional. It shall engage the clots in the switch housing to prevent rotation.
5. Moisture seal furnished with push buttons.

FIGURE 1. Push button body styles and mounting base configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

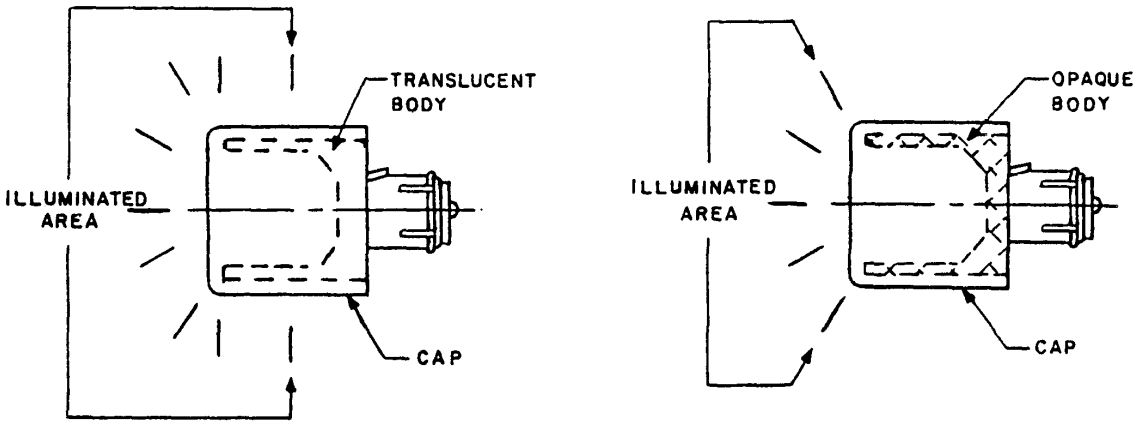


FIGURE 2. Illuminated area.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2, and table I.

Vibration: Grade 2 (10-500 Hz).

Thermal shock: 71°C maximum temperature (nonoperating).

Indexing: The positive index tab (type 2) shall withstand rotational torque up to 2-inch pounds in either direction without damage. Type 1 push buttons are orientable.

Photometric brightness and color: See table I.

Legend: See application information.

Part number: M22885/99-(dash number identifying the body style and mounting base (see figure 1) and color combinations of table I).

EXAMPLE:

M22885/99- K 2 14

Specification sheet number

Body style (see figure 1)

H = .50 sq
J = .50 dia
K = .63 sq
L = .68 dia
M = .75 sq
N = 1.12 x .75 rect
P = .75 x .50 rect
R = .75 dia

Mounting base (see figure 1)

1 = Screw-in
2 = Snap-in (positive index)

Color combinations (see table I)

01 thru 15 = Color numbers

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

TABLE 1. Configurations and characteristics.

Color number	Color combinations			Minimum photometric brightness	Color coordinates 1/	
	Cap	Translucent color filter	Body		x ±.04	y ±.04
				Footlamberts		
01	Red-translucent	None	White-translucent	105	.690	.309
02	Green-translucent	None	White-translucent	130	.211	.618
03	Yellow-translucent	None	White-translucent	255	.587	.406
04	Blue-translucent	None	White-translucent	9	.154	.221
05	White-translucent	None	White-translucent	445	.493	.413
06	White-translucent	Red	White-opaque	45	.697	.302
07	White-translucent	Green	White-opaque	30	.196	.614
08	White-translucent	Yellow	White-opaque	160	.592	.402
09	White-translucent	Blue	White-opaque	4	.174	.190
10	White-translucent	Blue-White	White-opaque	175	.419	.409
11	Clear-transparent	Red	Black-opaque	45	.695	.303
12	Clear-transparent	Green	Black-opaque	55	.209	.621
13	Clear-transparent	Yellow	Black-opaque	160	.580	.412
14	Clear-transparent	Blue	Black-opaque	4	.173	.194
15	Clear-transparent	White	Black-opaque	185	.499	.410

1/ The chromaticities of the diffusers or color filters are wexpressed as “x” and “y” coordinates on the CIE chromaticity diagram using a source illuminate of 2360 K.
2/ Will accept type 5 engraved legend only (see application information).

QUALIFICATION INSPECTION:

Qualification inspection is required as part of the illuminated push button switch covered by MIL-PRF-22885/18.


APPLICATION INFORMATION

Legend is not included when ordering push buttons by the military part number. Push buttons with legends are category II items and shall be acquired from a source listed on the qualified products list. Information on available legend types, legend construction, and character spacing is given in figure 3 and table II.

INTENDED USE:

The push buttons shall be capable of mating with push button switches, part numbers M22885/18-01 through -08 and -149 through -156, of MIL-PRF-22885/18. The push buttons shall accommodate one midget flange-base T-1-3/4 incandescent lamp. For provisioning purposes and spare parts support, the push buttons are not supplied with lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

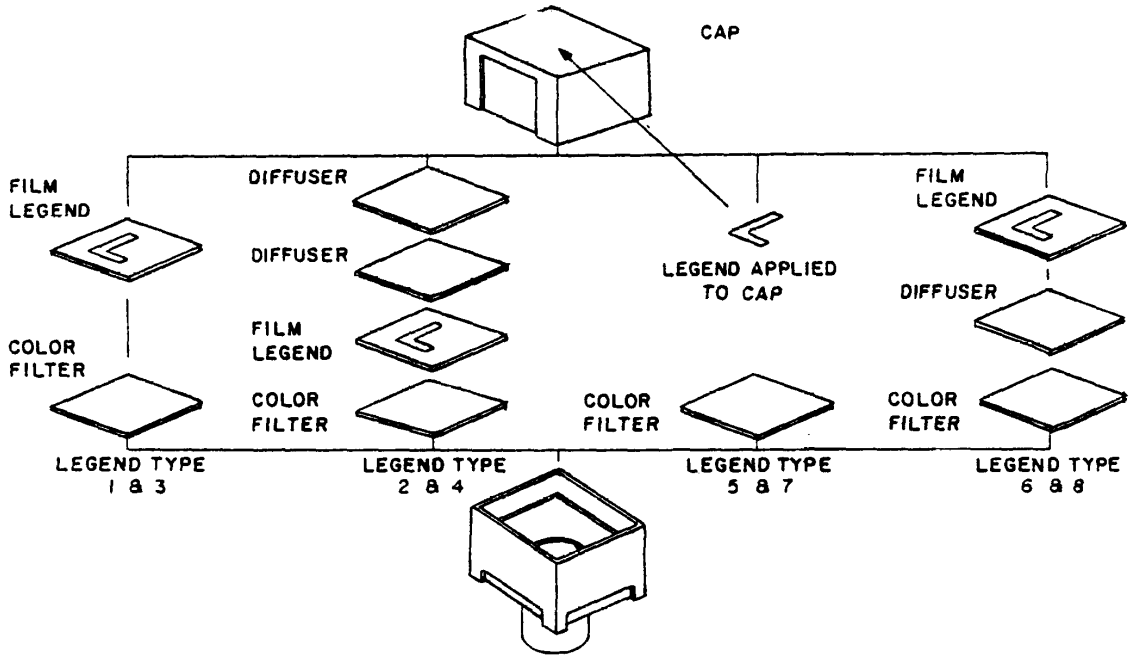

Legend type	Nonilluminated		Illuminated	
	Legend	Background	Legend	Background
1	Black 1/	Translucent white	Black	Color
2	Hidden (not easily discernible) 1/	Translucent white	Black	Color
3	Translucent color 1/	Black	Visible in color	Black
4	Hidden (not easily discernible) 1/	Translucent white	Visible in color	Opaque
5	Black filled engraving on external surface 2/	Translucent color cap	Black	Color
6	Translucent white 1/	Black	Visible	Black
7	White marking on external surface 3/	Matte black	Visible in color	Matte black
8	Black 1/	Translucent white	Black	Color

1/ = Film legend.

2/ = Engraved black fill on white, yellow, or amber background. White fill on all other colors.

3/ = Photo etch or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.


FIGURE 3. Legend types and construction.

TABLE II. Legend characters.

Maximum character count and number of lines per push button style and character size.

Push button body style (see fig. 1)	A = 10 point				B = 12 point				C = 18 point			
	No. char/line		No. lines		No. char/line		No. lines		No. char/line		No. lines	
	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film	Engrv.	Film
H	4	5	2	2	3	4	1	1	2	3	1	1
J	4	5	2	2	3	4	1	1	2	3	1	1
K	5	7	2	2	4	6	2	2	3	4	2	2
L	5	8	2	2	4	6	2	2	3	4	1	1
M	6	9	4	4	5	7	3	3	3	5	2	2
N	9	11	4	4	7	9	3	3	5	6	2	2
P	6	9	2	2	5	7	1	1	3	5	1	1
R	6	8	3	3	5	7	2	2	3	5	1	1

Film legend = alternate gothic no. 2;
Engraved legend + condensed gorton.
Character height: A = 10 point (approx. .10 inch (2.5mm);
B = 12point (approx .12 inch (3.05 mm)); C = 18 point (approx. .18 inch (4.6 mm))



	Film Legend	Engraved legend
Letter height to width ratio (letter T) - - -	1.66:1	2:1
Line width ratio $\frac{H}{b}$ _ _ _ _ _ _ _ _	6:1	8:1

Custodians:
Army - CR
Navy - EC
Air Force – 85

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5930-1690)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.