INCH POUND
MIL-PRF-22885/99C
31 January 2026
SUPERSEDING
MIL-PRF-22885/99B
1 March 2001

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED,

PUSH BUTTONS FOR
(SNAP-IN AND SCREW-IN)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the indicator lights described herein shall consist of this specification sheet and MIL-PRF-22885.


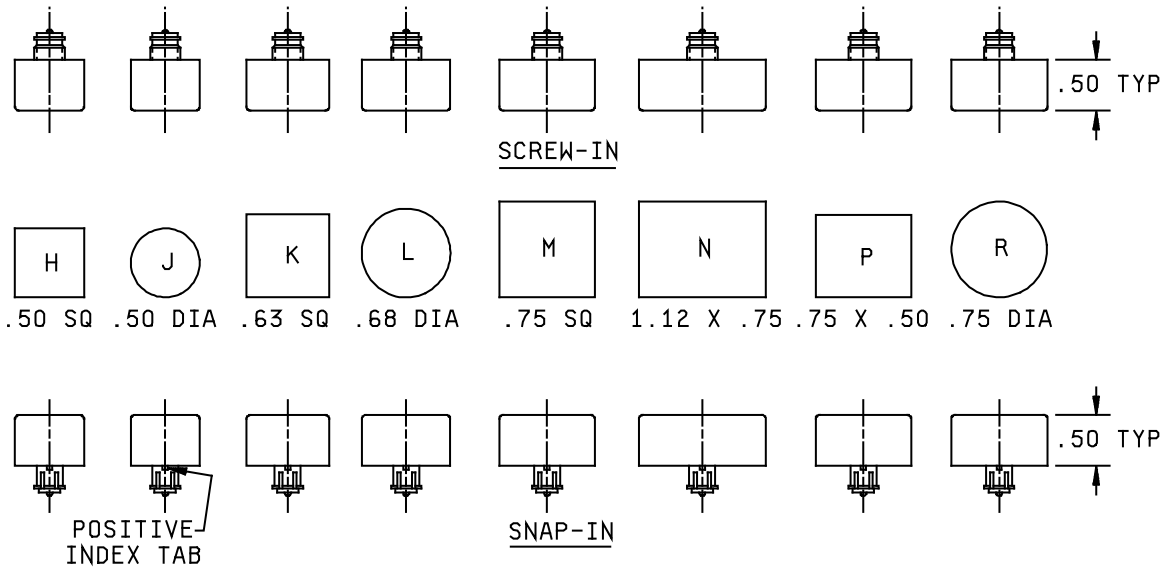


FIGURE 1. Push button body styles and mounting base configuration.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

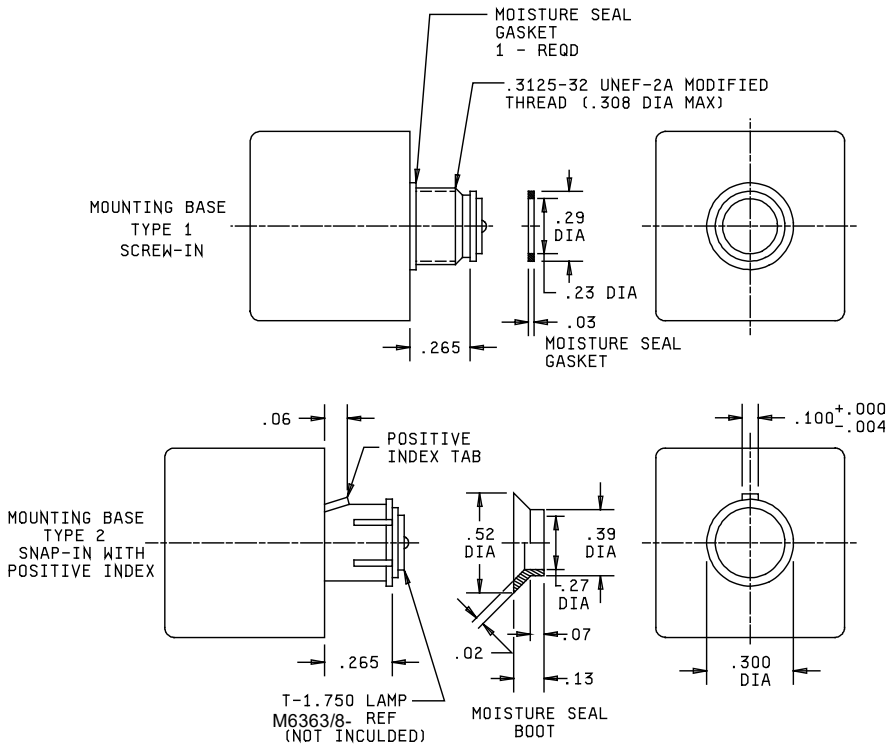

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .010 for three-place decimals and ± .02 for two-place decimals.
4. The positive index tab configuration is optional. It shall engage the clots in the switch housing to prevent rotation.
5. Moisture seal furnished with push buttons.
6. M6363/8 per MIL-DTL-6363/8.

FIGURE 1. Push button body styles and mounting base configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

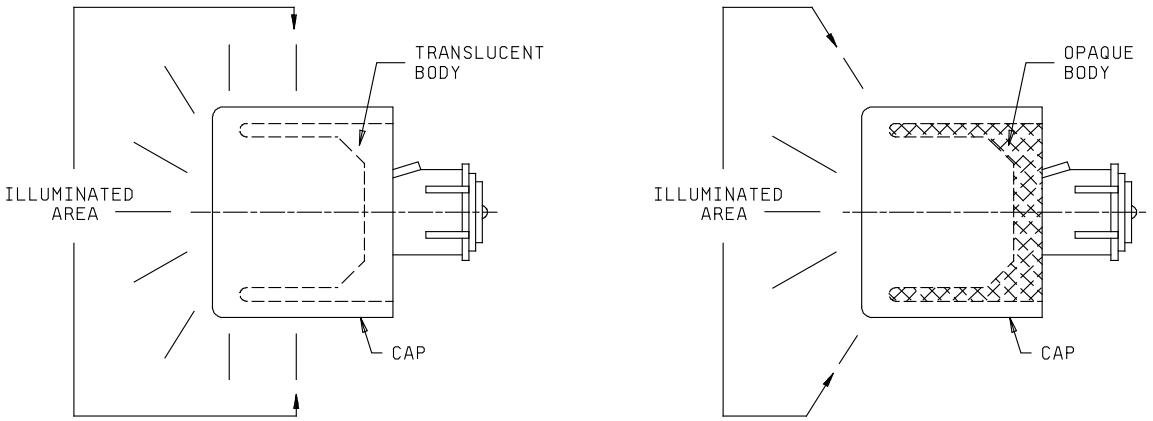


FIGURE 2. Illuminated area.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2, and table I.

Vibration: Grade 2 (10-500 Hz).

Thermal shock: 71°C maximum temperature (nonoperating).

Indexing: The positive index tab (type 2) shall withstand rotational torque up to 2-inch pounds in either direction without damage. Type I push buttons are orientable.

Photometric brightness and color: See table I.

Legend: See application information.

Part or Identifying Number (PIN): M22885/99-(dash number identifying the body style and mounting base (see figure 1) and color combinations of table I).

EXAMPLE: M22885/99 K 2 14

Specification sheet number

Body style (see figure 1)

H = .50 sq.
J = .50 dia.
K = .63 sq.
L = .68 dia.
M = .75 sq.
N = 1.12 x .75 rect.
P = .75 x .50 rect.
R = .75 dia.

Mounting base (see figure 1)

1 = Screw-in
2 = Snap-in (positive index)

Color combinations (see table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

01 through 15 = Color numbers
TABLE I. Configurations and characteristics.

Color number	Color combinations			Minimum photometric brightness Footlamberts	Color coordinates 1/	
	Cap	Translucent color filter	Body		x ± .04	y ± .04
01	Red-translucent	None	White-translucent	105	.690	.309
02	Green-translucent	None	White-translucent	130	.211	.618
03	Yellow-translucent	None	White-translucent	255	.587	.406
04	Blue-translucent	None	White-translucent	9	.154	.221
05	White-translucent	None	White-translucent	445	.493	.413
06	White-translucent	Red	White-opaque	45	.697	.302
07	White-translucent	Green	White-opaque	30	.196	.614
08	White-translucent	Yellow	White-opaque	160	.592	.402
09	White-translucent	Blue	White-opaque	4	.174	.190
10	White-translucent	Blue-white	White-opaque	175	.419	.409
11	Clear-transparent	Red	Black-opaque	45	.695	.303
12	Clear-transparent	Green	Black-opaque	55	.209	.621
13	Clear-transparent	Yellow	Black-opaque	160	.580	.412
14	Clear-transparent	Blue	Black-opaque	4	.173	.194
15	Clear-transparent	White	Black-opaque	185	.499	.410

1/ The chromaticities of the diffusers or color filters are expressed as "x" and "y" coordinates on the CIE chromaticity diagram using a source illuminate of 2,360 K.
2/ Will accept type 5 engraved legend only (see application information).

QUALIFICATION INSPECTION:

Qualification inspection is required as part of the illuminated push button switch covered by MIL-PRF-22885/18.


APPLICATION INFORMATION:

Legend is not included when ordering push buttons by the military PIN. Push buttons with legends are category II items and shall be acquired from a source listed on the qualified products list. Information on available legend types, legend construction, and character spacing is given in figure 3 and table II.

INTENDED USE:

The push buttons shall be capable of mating with push button switches, PIN M22885/18-01 through M22885/18-08 and M22885/18-149 through M22885/18-156 of MIL-PRF-22885/18. The push buttons shall accommodate one midget flange-base T-1-3/4 incandescent lamp. For provisioning purposes and spare parts support, the push buttons are not supplied with lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

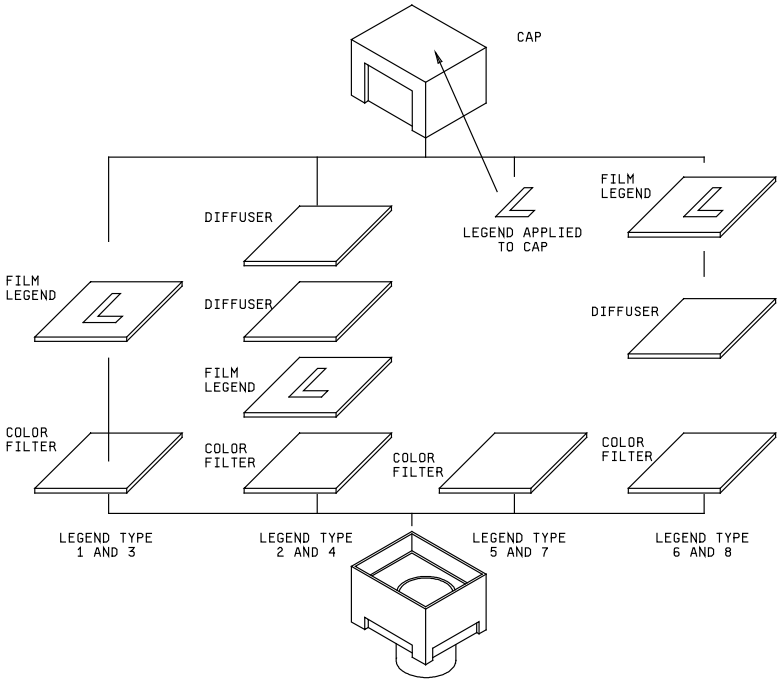

Legend type	Nonilluminated		Illuminated	
	Legend	Background	Legend	Background
1	Black 1/	Translucent white	Black	Color
2	Hidden (not easily discernible) 1/	Translucent white	Black	Color
3	Translucent color 1/	Black	Visible in color	Black
4	Hidden (not easily discernible) 1/	Translucent white	Visible in color	Opaque
5	Black filled engraving on external surface 2/	Translucent color cap	Black	Color
6	Translucent white 1/	Black	Visible	Black
7	White marking on external surface 3/	Matte black	Visible in color	Matte black
8	Black 1/	Translucent white	Black	Color

1/ Film legend.
2/ Engraved black fill on white, yellow, or amber background. White fill on all other colors.
3/ Photo etch or equivalent.

FIGURE 3. Legend types and construction.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

TABLE II. Legend characters.

Maximum character count and number of lines per push button style and character size.

Push button body style (see fig. 1)	A = 10 point				B = 12 point				C = 18 point			
	No. char/line		No. lines		No. char/line		No. lines		No. char/line		No. lines	
	Engrv	Film	Engrv	Film	Engrv	Film	Engrv	Film	Engrv	Film	Engrv	Film
H	4	5	2	2	3	4	1	1	2	3	1	1
J	4	5	2	2	3	4	1	1	2	3	1	1
K	5	7	2	2	4	6	2	2	3	4	2	2
L	5	8	2	2	4	6	2	2	3	4	1	1
M	6	9	4	4	5	7	3	3	3	5	2	2
N	9	11	4	4	7	9	3	3	5	6	2	2
P	6	9	2	2	5	7	1	1	3	5	1	1
R	6	8	3	3	5	7	2	2	3	5	1	1

Film legend = alternate gothic no. 2;
Engraved legend = condensed gorton.
Character height: A = 10 point (approximately .10 inch (2.5 mm));
B = 12 point (approximately .12 inch (3.05 mm)); C = 18 point (approximately .18 inch (4.6 mm)).



	Film legend	Engraved legend
Letter height to width ratio (letter T)	1.66:1	2:1
Line width ratio $\frac{H}{b}$	6:1	8:1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-22885, this document references the following:
MIL-PRF-22885/18 MIL-DTL-6363/8

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-029)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:32Z
Check the source to verify that this is the current version before use.