
MILITARY SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, 4-LAMP, SPDT AND DPDT, 7 5 AMPERES, SILVER CONTACTS, 1 AMPERE, GOLD CONTACTS (DRIPPROOF. SUNLIGHT READABLE, RFI SHIELDED).

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-22885

INCHES	MM
.160	4 064
.22	5.59
52	13.21
63	16 00
.680	17 272
74	18 80
.98	24.89

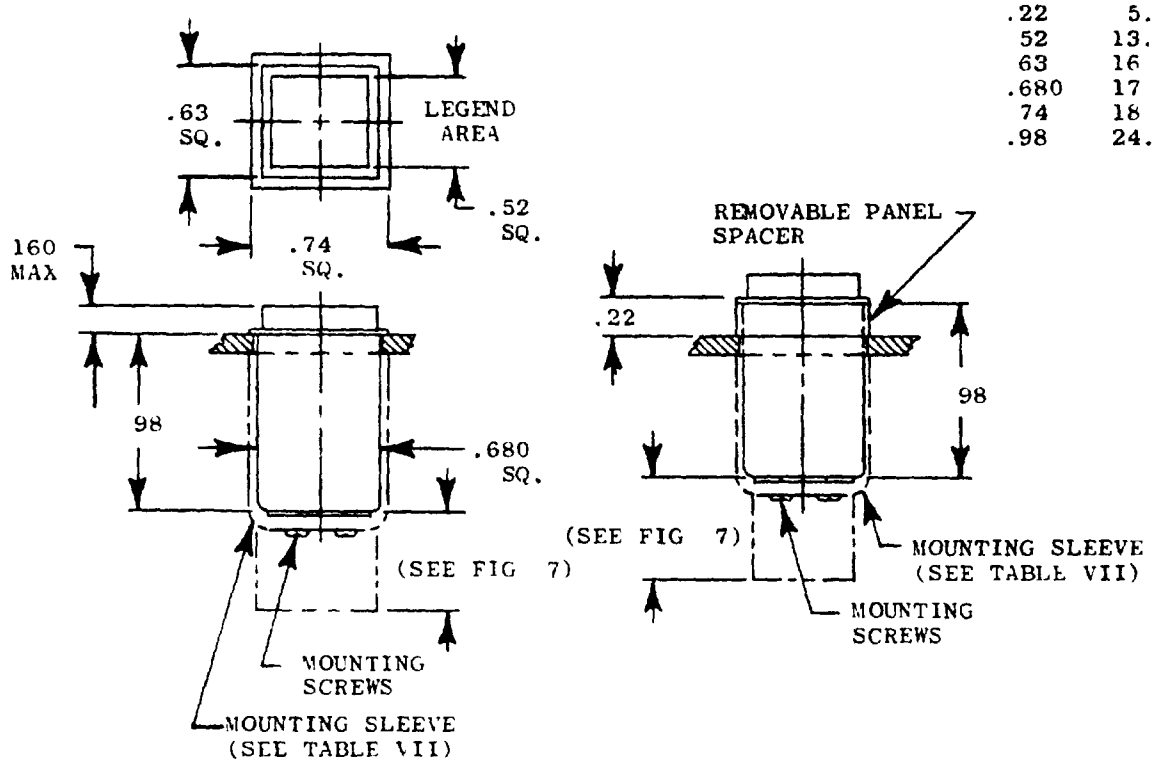


NOTES
1. Dimensions are in inches
2 Unless otherwise specified, tolerances are ± .010 for three place decimals and ± .03 for two place decimals
3 Basic switches shall meet the requirements of MIL-S-8805/101.
4. Pushbutton shall be designed to prevent incorrect insertion into switch housing.
5. Pushbutton shall be held captive to switch body by retaining element to prevent accidental interchange
6 Exact shape of switch optional provided dimensions specified are not exceeded
7 Terminals and basic switch identification shall be permanently marked

FIGURE 1. SWITCH, UNSEALED (WITH OR WITHOUT RFI SHIELDING)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

INCHES	MM
200	5 080
22	5 59
.52	13.21
63	16.00
.680	17.272
74	18 80
95	24 13
98	24 89

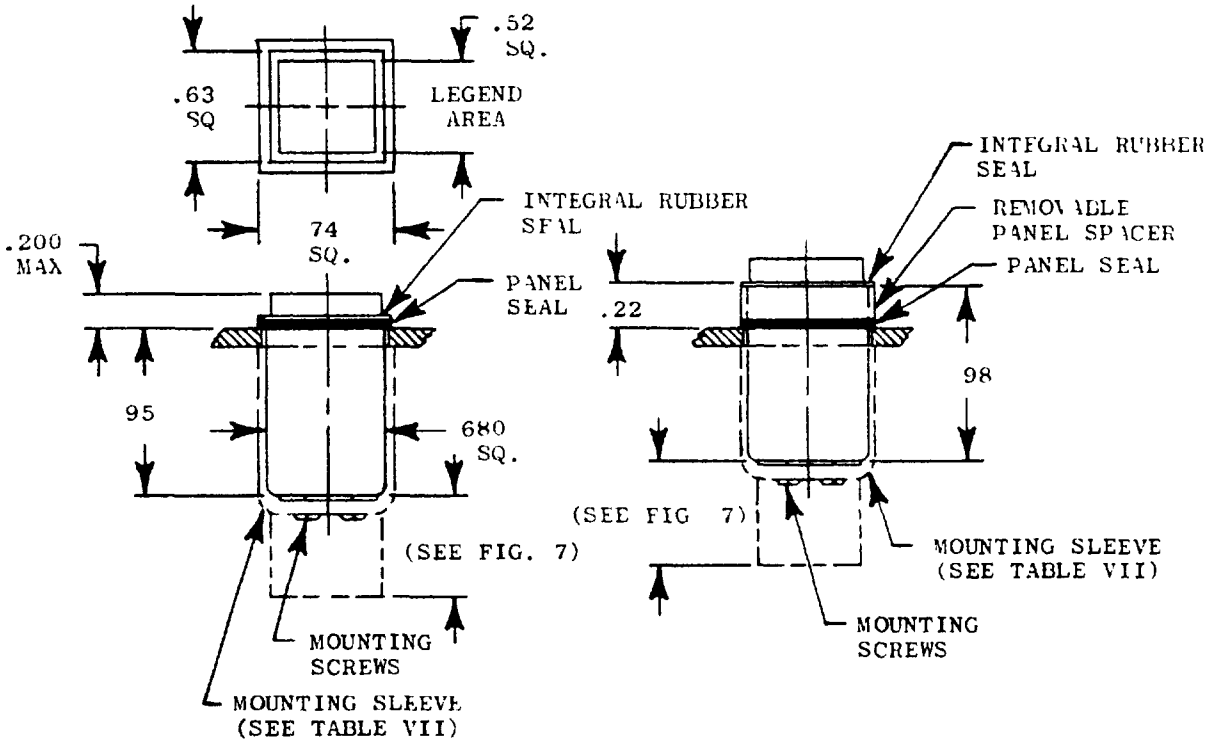

NOTES:
1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± .010 for three place decimals and ± .03 for two place decimals.
3. Basic switches shall meet the requirements of MIL-S-8805/101.
4. Pushbutton shall be designed to prevent incorrect insertion into switch housing.
5. Pushbutton shall be held captive to switch body by retaining element to prevent accidental interchange
6. Exact shape of switch optional provided dimensions specified are not exceeded
7. Terminals and basic switch identification shall be permanently marked as shown


FIGURE 2 SWITCH, SEALED (WITH OR WITHOUT RFI SHIELDING)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.



INCHES	MM
030	.762
170	4.318
.200	5.080
.670	17.018
740	18.796
760	19.304
890	22.606
.980	24.892

FIGURE 3. PANEL SEAL

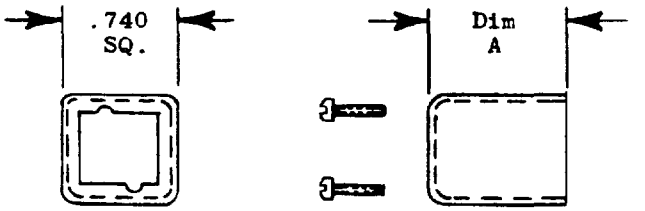

CONFIG. CODE	DIM "A"
A	.980
B	.890
C	.760
D	.670

FIGURE 4. MOUNTING SLEEVE





CONFIG. CODE	DIM "A"
C	.200
D	.170


FIGURE 5. PANEL SPACER

NOTES.
1. Dimensions are in inches.
2 Unless otherwise specified, tolerances are ± .010 for three place decimals and ± .03 for two place decimals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

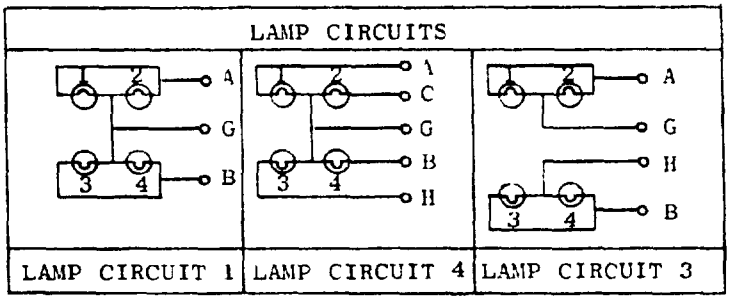

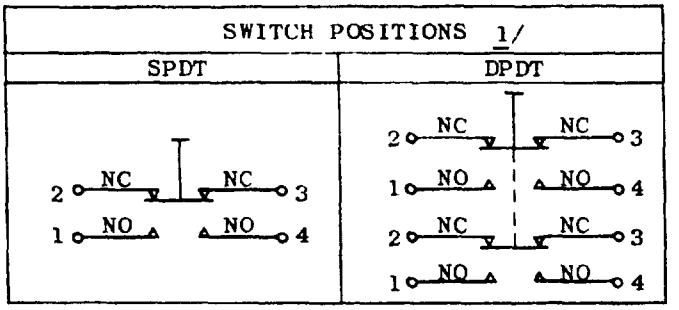


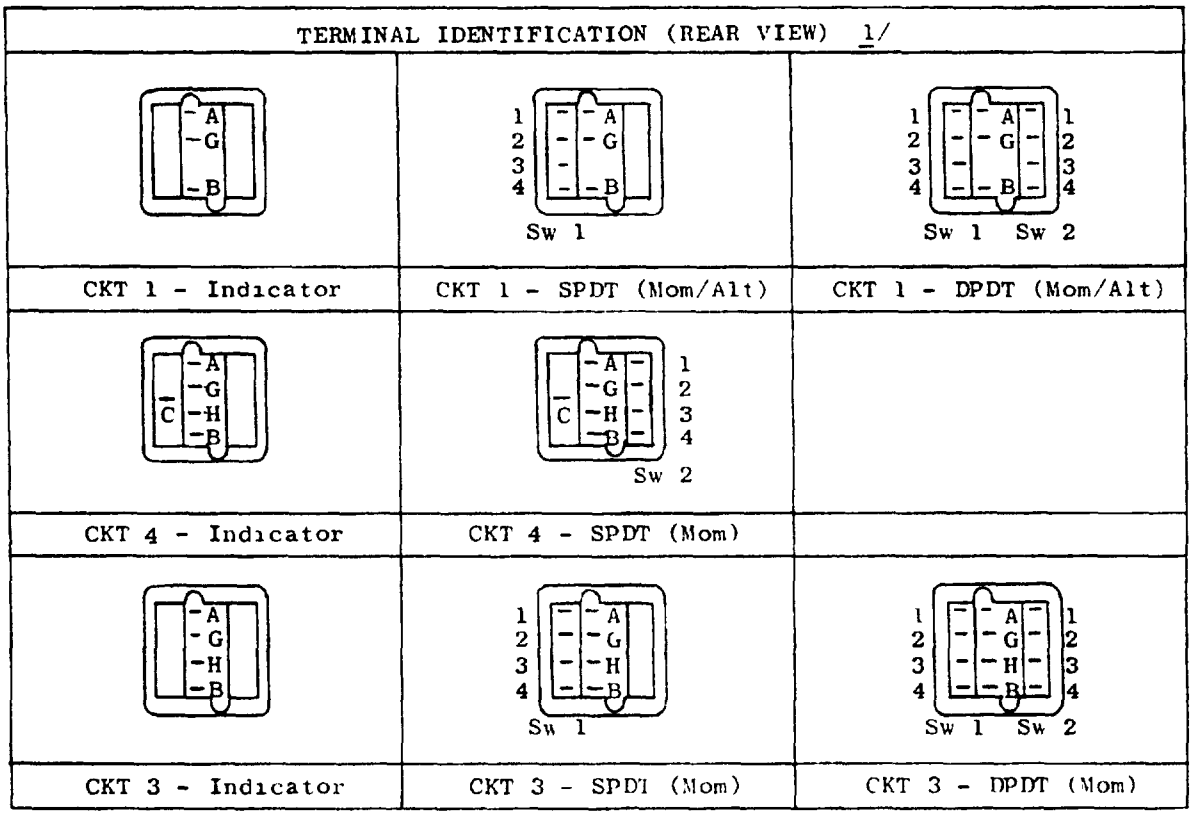


1/ Housing shall indicate switch circuit (Sw 1, Sw 2) as required.

FIGURE 6. CIRCUITRY AND TERMINAL IDENTIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

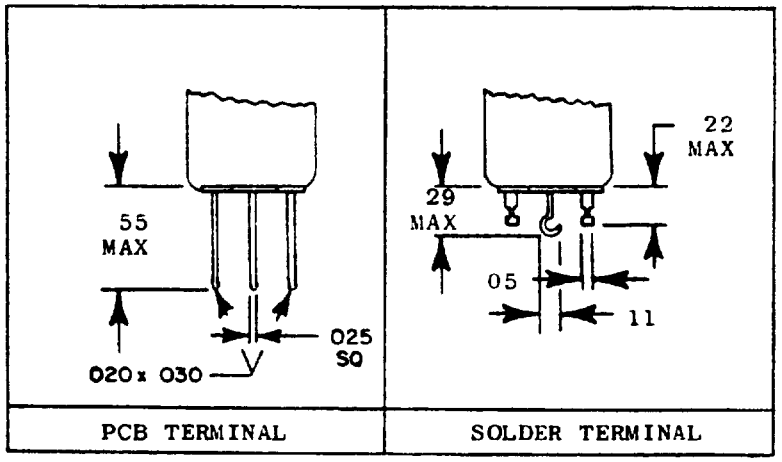

INCHES	MM
.010	.254
.020	508
.030	762
.05	1.27
.07	1 78
.11	2.79
.22	5.59
.29	7.37
.55	13.97
.689	17.500
.750	19.050

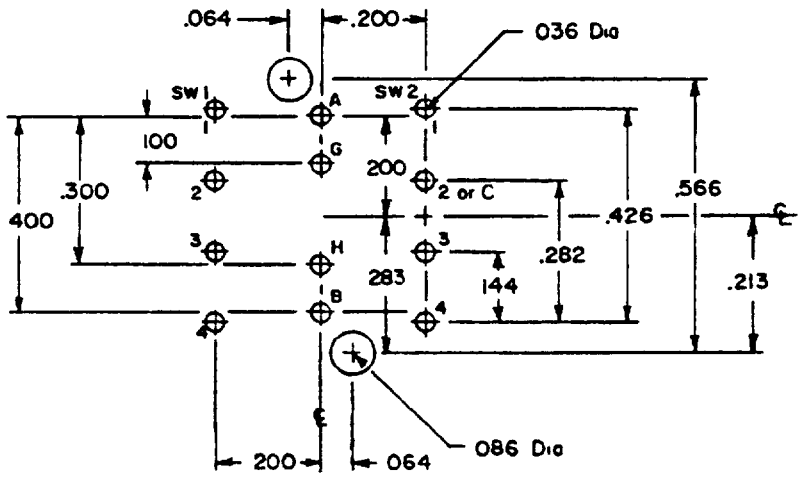

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT

FIGURE 7. SWITCH AND LAMP TERMINATION

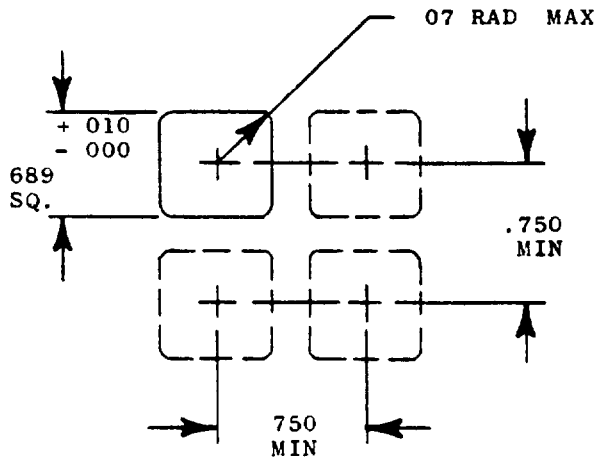


FIGURE 8. RECOMMENDED PANEL CUTOUT

NOTES:
1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± 010 for three place decimals and ± 03 for two place decimals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configurations See Figures 1 through 8

Complete switch shall consist of

1 - Pushbutton (MIL-S-22885/102) includes front lens and color assembly, lens retainer, divider, integral seal and RFI screen when specified (See Table V)
1 - Switch Body includes 1 or 2 (MIL-S-8805/101) basic switches Also includes mounting sleeve, panel spacer, panel seal, and mounting screws as specified (See Table V and Table VII).
4 - Lamps. (T-1 midget-flange base) not included, order separately

Housing: Aluminum Alloy
Finish Anodize or Chemical Film

Mounting Sleeve: Aluminum Alloy
Finish· Anodize or Chemical Film

Enclosure Design Unsealed 1
Dripproof 2

Weight. 16 grams maximum

Color and Luminance: See Table III and Table IV

Temperature Characteristic: 1 (-55°C to +85°C)

Vibration Grade. 3 (10-2000Hz)

Operating Characteristics: Actuation force 2 to 5 pounds
Actuation travel 125 ± 025

Pushbutton Extraction Force· 2 to 5 pounds

Shock 75 G (MIL-STD-202, Method 213, Test Condition B)

Thermal Shock: During high temperature portion of thermal shock test, all four lamps shall be energized with full rated voltage Total lamp wattage shall not exceed 1 2 watts

Dripproof Test: When specified, test in accordance with MIL-S-22885. There shall be no leakage of water through the panel and pushbutton seals as determined by visual examination and the dielectric withstanding voltage test

Electrical Ratings See Table I and Table II

Low Level Life Applicable for gold contact switches 50,000 cycles

Marking: Per MIL-STD-130

Part Number M22885/100- (dash number from Table V). For acquisition of Government spares, M22885/100- (dash number 501 through dash number 541), MIL-S-22885/102, as applicable, shall be used Provisioning documentation shall show parts breakdown by associated military part number

RFI Shielding When specified (See Table V), switches shall be equipped with an RFI screen Resistance between the mounting sleeve and the RFI screen shall be measured in accordance with Method 307 of MIL-STD-202 and shall not exceed 1 ohm The following details and exceptions shall apply·

a Method of connection Between a suitable exterior point on the mounting surface and the screen (lens may be drilled for access to screen)
b. Test current. 100 ± 10 milliampers
c Open circuit test voltage 6 ± 1 Vdc
d Number of measurements per activation: One in free position and one in full plunger overtravel position There shall be no exterior force applied to plunger during measurement of resistance in free position
e. Number of test activations: One complete cycle of operation with full overtravel

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

Sunlight Readability: When specified, the average contrast ratio of each lighted legend character to background shall be 0.6 minimum. The contrast ratio of each unlighted character shall be less than 0 1

The average contrast ratio of each legend character to the background shall be measured with an incidental illumination of 10,000 foot-candles minimum, at 5,000 ± 500° Kelvin color temperature, directed at an angle of 45° ± 2° to the normal of the viewing surface Luminance readings shall be point readings taken by a calibrated photoelectric photometer At least 3 readings shall be taken at equally spaced points on each legend character The readings shall be averaged provided that the ratio of high-to-low readings shall not exceed 2·1. At least 3 readings shall then be taken at equidistant points in the background immediately adjacent to each character The background readings shall also be averaged The contrast ratios, C_L and C_{UL}, shall be calculated for each character

The ON/BACKGROUND contrast is defined by $C_L = (B_2-B_1)/B_1$

The OFF/BACKGROUND contrast is defined by $C_{UL} = (B_3-B_1)/B_1$

B_1 = Average background luminance

B_2 = Average character luminance, legend illuminated

B_3 = Average character luminance, legend not illuminated

Unless otherwise specified, switch lamps used for testing shall have a calibrated mean spherical candlepower of .15 ± .01. Unless otherwise specified, the following test legend shall be utilized:

REMOTE
ALT LOW

TABLE I. ELECTRICAL RATINGS - SILVER CONTACTS

Load	Sea Level, 28 Vdc	80,000 Feet, 28 Vdc
	NO or NC	NO or NC
	(Amperes, max)	(Amperes, max)
Resistive	7 5	7.5
Inductive	5 0	3 0
Lamp	1.0	---

TABLE II. ELECTRICAL RATINGS - GOLD PLATED CONTACTS

Load	Sea Level, 28 Vdc	80,000 Feet, 28 Vdc
	(Amperes, max.)	(Amperes, max.)
Resistive	1	1
Inductive	0.5	0 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE III. LUMINANCE

Display Type	Color	Brightness (foot-lamberts) 1/		
		Color Code	Without RFI Screen 2/	With RFI Screen 2/
N	Yellow	Y	350	175
	Red	R	70	35
	Green	G	70	35
	White	W	130	65
	Blue	B	25	12
W	Yellow	Y	350	175
	Red	R	70	35
	Green	G	70	35
	White	W	130	65
	Blue	B	25	12
S 3/	Yellow	Y	400	250
	Red	R	250	150
	Green	G	250	150
	White	W	400	250
	Blue	B	150	--- 4/
C	Yellow	Y	350	175
	Red	R	70	35
	Green	G	70	35
	White	W	130	65
	Blue	B	25	12

1/ When illuminated by 4 (T-1 midget-flange base) subminiature lamps of 15 ± 01 mean spherical candlepower (MSCP) at 5 Vdc.
2/ Minimum average.
3/ Luminance shall be measured at three points on each legend character and averaged provided that the ratio of high-to-low readings shall not exceed 2·1. The average contrast of each character shall be reported
4/ Not available in blue

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE IV. ILLUMINATED COLOR LIMITS 3/

COLOR	X 1/	Y 1/
Red (R)	685 .675 685 .695	SL 2/ .305 .295 SL 2/
Green (G)	300 .300 .350 .350	SL 2/ .600 .600 SL 2/
Yellow (Y)	.586 .577 .596 605	SL 2/ .400 .382 SL 2/
Blue (B)	.230 .230 .320 .320	420 350 .350 .420
White (W)	.450 .450 .510 .510	.400 .420 .420 .400

1/ The chromaticities of the colors are expressed as "X" and "Y" coordinates on the CIE chromaticity diagram and are within the limits bound by the coordinates listed for each color

2/ Where intersection occurs with the spectrum locus on the CIE chromaticity diagram

3/ Chromaticity values are obtained when switch is illuminated by 4 (T-1 midget-flange base) subminiature lamps of 15 ± 01 mean spherical candlepower (MSCP) at 5 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

PART NUMBERS· Part Numbers are assigned as follows

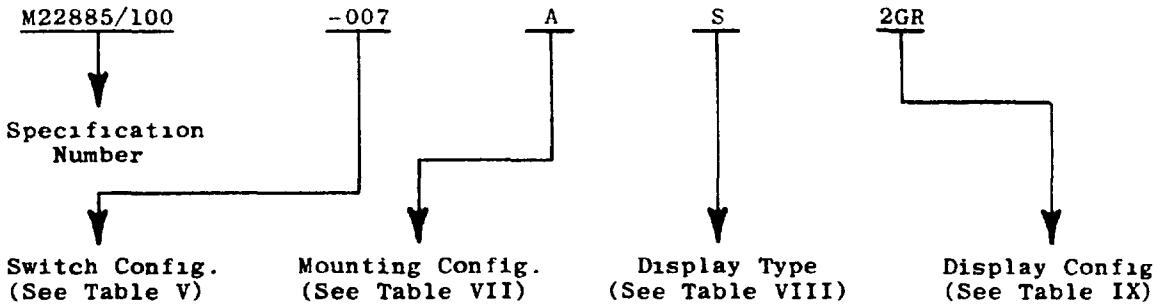


TABLE V. SWITCH CONFIGURATION DASH NUMBER

INDICATOR		MOMENTARY								LAMP CIRCUIT NO	PUSHBUTTON M22885/102- DISPLAY TYPE 7/			
PCB 1/	SLDR 2/	SPDT 3/				DPDT 4/								
		SILVER 8/		GOLD 9/		SILVER 8/		GOLD 9/						
		PCB	SLDR	PCB	SLDR	PCB	SLDR	PCB	SLDR	FIG. 6	N	W	C	S
STANDARD SWITCH, NO SEAL, NO RFI SHIELDING														
001	004	007	010	013	016	019	021	023	025	1	01	09	17	25
002	005	008	011	014	017	-	-	-	-	4	01	09	17	25
003	006	009	012	015	018	020	022	024	026	3	02	10	18	26
STANDARD SWITCH WITH SEAL, NO RFI SHIELDING														
035	038	041	044	047	050	053	055	057	059	1	03	11	19	27
036	039	042	045	048	051	-	-	-	-	4	03	11	19	27
037	040	043	046	049	052	054	056	058	060	3	04	12	20	28
STANDARD SWITCH WITH RFI SHIELDING, NO SEAL														
069	072	075	078	081	084	087	089	091	093	1	05	13	21	29
070	073	076	079	082	085	-	-	-	-	4	05	13	21	29
071	074	077	080	083	086	088	090	092	094	3	06	14	22	30
STANDARD SWITCH WITH SEAL AND RFI SHIELDING														
103	106	109	112	115	118	121	123	125	127	1	07	15	23	31
104	107	110	113	116	119	-	-	-	-	4	07	15	23	31
105	108	111	114	117	120	122	124	126	128	3	08	16	24	32
SWITCH BODY ONLY 6/														
501	504	507	510	513	516	519	521	523	525	1				
502	505	508	511	514	517	-	-	-	-	4	5/			
503	506	509	512	515	518	520	522	524	526	3				

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE V. SWITCH CONFIGURATION DASH NUMBER

(Continued)

ALTERNATE								LAMP CIRCUIT NO FIG. 6	PUSHBUTTON M22885/102- DISPLAY TYPE 7/			
SPDT 3/				DPDT 4/								
SILVER 8/		GOLD 9/		SILVER 8/		GOLD 9/						
PCB	SLDR	PCB	SLDR	PCB	SLDR	PCB	SLDR		N	W	C	S
STANDARD SWITCH, NO SEAL, NO RFI SHIELDING												
027	028	029	030	031	032	033	034	1	01	09	17	25
-	-	-	-	-	-	-	-	4	-	-	-	-
-	-	-	-	-	-	-	-	3	-	-	-	-
STANDARD SWITCH WITH SEAL, NO RFI SHIELDING												
061	062	063	064	065	066	067	068	1	03	11	19	27
-	-	-	-	-	-	-	-	4	-	-	-	-
-	-	-	-	-	-	-	-	3	-	-	-	-
STANDARD SWITCH WITH RFI SHIELDING, NO SEAL												
095	096	097	098	099	100	101	102	1	05	13	21	29
-	-	-	-	-	-	-	-	4	-	-	-	-
-	-	-	-	-	-	-	-	3	-	-	-	-
STANDARD SWITCH WITH SEAL AND RFI SHIELDING												
129	130	131	132	133	134	135	136	1	07	15	23	31
-	-	-	-	-	-	-	-	4	-	-	-	-
-	-	-	-	-	-	-	-	3	-	-	-	-
SWITCH BODY ONLY 6/												
527	528	529	530	531	532	533	534	1				
-	-	-	-	-	-	-	-	4		5/		
-	-	-	-	-	-	-	-	3				

1/ PCB Indicates printed circuit board pin termination
2/ SLDR Indicates solder pin termination.
3/ SPDT Single pole double throw switch.
4/ DPDT Double pole double throw switch
5/ Does not include pushbutton
6/ For switch body spare parts, order 501 through 534 as required Does not include mounting sleeve, panel spacer, panel seal, or mounting screws
7/ Reference Table VIII.
8/ Reference Table I.
9/ Reference Table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE VI. SPARE PART CONFIGURATION DASH NUMBER

DASH NUMBER	DESCRIPTION	
1/	Switch Body	
535	Mounting Sleeve, Code A, includes 2 mounting screws	3/
536	Mounting Sleeve, Code B, includes 2 mounting screws	3/
537	Mounting Sleeve, Code C, includes 2 mounting screws	3/
538	Mounting Sleeve, Code D, includes 2 mounting screws	3/
539	Panel Seal	4/
540	Panel Spacer, Code C	5/
541	Panel Spacer, Code D	5/
2/	Pushbutton	

1/ For switch body spare parts, order 501 through 534 as required.
2/ Refer to MIL-S-22885/102 for pushbutton spare parts
3/ Refer to Figure 4
4/ Refer to Figure 3
5/ Refer to Figure 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE VII. MOUNTING CONFIGURATION




CONFIG. CODE	DESCRIPTION
A	Mounting sleeve for .031 to 093 panel thickness, includes 2 mounting screws.
B	Mounting sleeve for .125 to 187 panel thickness, includes 2 mounting screws.
C	Mounting sleeve for edge lighted panel with 031 to .093 sub-panel thickness, includes panel spacer and 2 mounting screws
D	Mounting sleeve for edge lighted panel with 125 to 187 sub-panel thickness, includes panel spacer and 2 mounting screws

TABLE VIII. DISPLAY TYPE

DISPLAY TYPE	DESCRIPTION
N	LIGHTED LETTERS. Letters appear white on a black background until illuminated and then letters appear in color, background remains black
W	LIGHTED BACKGROUND: Letters appear black on a white background until illuminated and then background appears in color, letters remain black
S	SUNLIGHT READABLE: Letters are not legible until illuminated and then letters appear in color, background remains black When illuminated, lighted letters are readable in direct sunlight
C	COLORED BACKGROUND· Letters appear black against a colored background until illuminated and then background appears in lighted color, letters remain black

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

TABLE IX. DISPLAY CONFIGURATION 2/

DISPLAY CODE 1/ 3/	DISPLAY	AVAILABILITY PER LAMP CIRCUIT		
		 CIRCUIT 1	 CIRCUIT 4	 CIRCUIT 3
1X		Yes	Yes	Yes
2XX		Yes	Yes	Yes
3XX		No	Yes	No
4XXX		No	Yes	No
5XXX		No	Yes	No
6XXX		No	Yes	No
7XXX		No	Yes	No
8XXXX		No	Yes	No

1/ Display codes shown are for pushbuttons without color filters Replace X's with the color symbols of Table IV in sequence shown.
2/ Legends shall be procured separately from a source listed on the qualified products list
3/ Display codes 3XX through 8XXXX available with lamp circuit 4 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

QUALIFICATION.

All applicants for qualification approval shall demonstrate that each of their items conform to all the requirements in the applicable documents, singularly and in combination with all the other previously qualified items, regardless of manufacturer

Group submission See Table X

TABLE X. QUALIFICATION INSPECTION - GROUP SUBMISSION

Switch	Qualification Table X of MIL-S-22885		Extent of Approval
	Group	Number of Switches	
M22885/100-068BW1W	I	10	1 & 2 7/ (Unsealed Dripproof)
	II	4 (From Group I)	
	III	2 (From Group I)	
	VI	2 (From Group I) 1/	
	VII	2 (From Group I) 2/	
M22885/100-123BW1W	I	6	1 & 2 7/ (Unsealed Dripproof)
	II	4 (From Group I)	
	VI	2 (From Group I) 3/	
M22885/100-010BN1(X)	VIII 6/	10 (2 of each color)	All
M22885/100-010BW1(X)		10 (2 of each color)	
M22885/100-010BS1(X)		10 (2 of each color) 5/	
M22885/100-010BC1(X)		10 (2 of each color)	
M22885/100-123BW1W	I	2	All
	4/	2	

1/ Test sea level inductive DC load only.
2/ Intermediate current test not applicable
3/ Test sea level resistive DC load only.
4/ These switches shall be tested for RFI shielding
5/ Sunlight readable test legend. Remote, Alt Low.
6/ 2 switch bodies only to be used for color and luminance testing
7/ Enclosure design

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

Group A Inspection Shall be in accordance with Table XI.

TABLE XI GROUP A INSPECTION

Examination or Test	Requirement and Inspection Reference
Visual and mechanical examination	MIL-S-22885
Operating characteristics	MIL-S-22885
Dielectric withstanding voltage	MIL-S-22885
Contact resistance	MIL-S-22885

Custodians:
Air Force - 85

Review activities:
Air Force - 11, 17, 99

User activities
Air Force - 19

Preparing activity
Air Force - 85

(Project 5930-F561-1)

* U.S. GOVERNMENT PRINTING OFFICE 1982-505-022/4357

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-22885/100(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD/PTS Standardization
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:33Z
Check the source to verify that this is the current version before use.