MIL-C-16472H
30 Jun 88
SUPERSEDING
MIL-C-16472G
9 August 1983

MILITARY SPECIFICATION

CAP, KNIT (WATCH)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a knitted wool watch cap, of one type and size only.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
* NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

* MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43665	- Cloth Wool: Mothproofing Treatment of

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1491	- Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents US Government Printing Office, Washington, DC 20402-0001).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Application for copies shall be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIAITON OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8 Colorfastness to Crocking: AATCC Crockmeter Method

(Application for copies may be obtained from AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, Raleigh, NC 27709-2215).

US DEPARTMENT OF AGRICULTURE

Methods of Test for Grade of Wool

(Application for copies may be addressed to the US Department of Agriculture, Agricultural Marketing Service, Washington, DC 20402).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 Standard sample. The finished knit watch cap shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for with the standard sample is referenced. The piece number for shade only is 85247 (see 6.3).

* 3.3 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.4 Material.

3.4.1 Wool. The wool shall be fleece or pulled sheep's wool, or a combination of both, not lower in grade than 54's US Standard. The wool shall be free of reprocessed, reused, or waste wool (see 4.4.1).

3.4.1.1 Yarn. The yarn used in the knitting and sewing (cover thread yarn) shall be of a two (2) ply worsted (see 4.4.1).

3.4.1.2 Mothproofing. The wool shall be mothproofed in accordance with MIL-C-43665 (see 4.4.1).

* 3.4.2 Knitted fabric. The knitted fabric for the crown and body portions of the watch cap shall be circular knit continuously together, utilizing either a simulated two ply or single ply construction process as shown in figures 1 and 2. The finished component sections of the watch cap shall conform to the physical requirements shown in Table I when tested as specified in 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Table I - Physical requirements of knitted component parts

Component	Stitch Type	Wales per inch (min.)	Courses per inch (min.)
Simulated two ply process, when applicable:			
Body	Half or full cardigan	6	12
Crown	1 x 1 rib	6	14
Single ply process, when applicable:			
Body	Half or full cardigan	6	12
Crown	1 x 1 rib	9	14
Bottom	1 x 1 rib with non-raveling edge	6	12

3.4.3 Thread. The thread for seaming and stitching the watch cap shall be cotton, conforming to type IC2, ticket no. A, 3-ply of V-T-276. The thread shall be dyed Black AA, Cable No. 66043, in accordance with the Department of Defense Standard Shades for Sewing Threads.

* 3.4.3.1 Colorfastness. The dyed thread shall show fastness to light, laundering (after 3 cycles), and perspiration equal to or better than the standard sample. As a limit of acceptability, when no standard is available, the dyed thread shall show a minimum of "good" fastness to light, laundering (after 3 cycles), and perspiration. Testing shall be performed as specified in V-T-276.

* 3.4.4 Combination label. Each knit watch cap shall have a combination identification label conforming to type VI, classes 1 and 10 of DDD-L-20. The label shall bear the following inscription and shall show fastness to laundering only:

NAME:
SERVICE NO:
CAP, KNIT, WATCH (100% Wool)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

Dry Clean for Best Results

OR

Hand Launder in Lukewarm Water Using a Mild Soap
DO NOT WRING OR TWIST
Rinse in Clean Cold Water
Reshape and Dry Flat

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

3.5 Color. The color of the knit watch cap shall match Blue Shade 3346.

* 3.5.1 Matching. The dyed knit watch cap shall match the standard sample when viewed under filtered tungsten lamps which approximate artificial daylight having a correlated color temperature of 7500 ± 200 K, with illlumination of 100 ± 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 ± 200 K.

* 3.5.2 Colorfastness. The dyed knit watch cap shall show colorfastness to light, laundering, perspiration, and crocking equal to or better than the standard sample when tested as specified in 4.5. As a limit of acceptability, or when no standard is available, the dyed knit watch cap shall show a minimum of "good" fastness to light, laundering, and perspiration, and shall show a wet and dry crocking rating not lower than 3, when tested as a specified in 4.5.

3.6 Nonfibrous material content. The starch and protein content, including chloroform-soluble and water-soluble material of the finished dyed watch cap, shall not exceed 3.0 percent when tested as specified in 4.5.

3.7 Design. The watch cap shall be bell shaped, pull over style. The crown shall be shaped of four (4) or six (6) equal sections as applicable, joined together by darts of equal length.

3.7.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.8 Construction.

* 3.8.1 Stitch, seams, and stitching types. Stitch, seam, and stitching types as specified in Table II, shall conform to FED-STD-751. Whenever two or more methods for seam and stitching are given for the same operation, any one of them may be used.

* 3.8.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 3/8 inch. Thread breaks (all stitch types), shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.8.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.9 Manufacturing operations requirements. The knit watch cap shall be manufactured in accordance with operation requirements specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF KNIT WATCH CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Assemble cap.				
	a. Stitch the four (4) or six (6) equal sections of the crown, as applicable, with darts of equal length. Simultaneously catch an edge of the specified cloth label in one of the dart seams. Each finished dart shall extend from the top center of crown to not less than 1/4 inch nor more than 1/2 inch from beginning of body stitching. The label shall finish face side up with the printing clearly visible.	504	SSa-1	8-12	A/3 A/3 2-ply worsted yarn
	b. Turn the cap inside out to its finished position.				
2.	Cleaning and pressing.				
	a. All ends of thread shall be trimmed and loose threads removed throughout the cap.				
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.				
	b. Remove all spots and stains.				
	c. Steam neatly over blocks.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

* 3.11 Measurements. The finished knit watch cap shall conform to the dimensions specified in Table III. All measurements and tolerances are expressed in inches and shall be made with the cap placed smooth and flat.

Table III - Finished measurements

Measurement	Dimensions	Tolerance
Simulated two ply process: 1/		
Overall length (A)	11 to 12-1/2	-0-
Width across bottom edge (B)	8-1/2	±1/4
Height of crown (C)	2-1/2	±1/4
Single ply process 2/		
Height of crown (A)	2-1/2	±1/4
Height of rack stitch (B)	5/8	±1/8
Overall length (C)	11 to 12-1/2	-0-
Width across bottom edge (D)	8-1/2	±1/4

1/ For the simulated two ply process refer to Figure 1 for the following points of measurement:

A. Measurement shall be taken from the top center point of crown to bottom open edge of watch cap.

B. Measurement shall be taken across the bottom open edge of watch cap.

C. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).

2/ For the single ply process refer to Figure 2 for the following points of measurement:

A. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).

B. Measurement shall be taken from the bottom open edge of rack stitch to beginning of body stitching.

C. Measurement shall be taken from the top center point of crown to bottom open edge of rack stitching, with the cap folded in half lengthwise so as to lie flat.

D. Measurement shall be taken across the bottom open edge of watch cap.

3.12 Finished weight. The finished weight of each knit watch cap shall be not less than 3-1/4 ounces (see 4.5).

3.13 Workmanship. The finished knit watch cap shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.3 shall be inspected for compliance with design construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance shall be submitted for the wool requirements of 3.4.1, the worsted yarn requirements of 3.4.1.1, and the mothproofing requirements of 3.4.1.2.

4.4.1.1 Wool grade (scoured wool). The wool, when furnished in scoured form, shall be visually examined for grade prior to picking, carding, and dyeing by comparison with the applicable US Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by a width (wedge) method approved by the Government. The examination for grade shall be performed on a composite sample of 1 pound for each 10,000 pounds or fraction thereof in the lot. The lot shall be unacceptable if the sample does not conform to the required grade specified in 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.4.1.2 Wool grade (top form). The wool when furnished in top form, shall be visually examined for grade by comparison with the applicable US Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by a width (wedge) method approved by the Government. The sample unit shall be unacceptable if one or more units fail to meet the required grade specified in 3.4.1.

Lot size (units)	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

4.4.1.3 In-process inspection. Inspection shall be made at any point and during any phase of the manufacturing process to assure that no reprocessed, reused, or waste wool is used (see 3.4.1). The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The size shall be expressed in units of watch caps. The sample unit shall be one finished watch cap.

4.4.2.1 Visual examination. The finished watch caps shall be examined for defects in design, material, construction, workmanship, and marking and the defects classified in accordance with the list below:

Defects	Classification Major	Minor
I. MATERIAL DEFECT(S) AND DAMAGE(S)		
a. Any size hole, cut, tear, smash, run or dropped stitch, missing yarn, or broken yarn	X	
b. Loose yarn, knot protruding from surface, thin place or uneven knitting, knitting in waste, visible mend, pulled thread or yarn, or slubby yarn more than twice the size of the normal diameter of the yarn.		X
c. Shade bar, dye streak, or area of no dye penetration		X
NOTE: For knitted fabric defect definitions, see MIL-STD-1491		
II. CLEANNESS		
a. Any spot or stain clearly noticeable		X
b. Two or more thread or yarn ends not trimmed 1/4 inch or less, loose, or not removed		X
III. SHADED PART(S)		
Any part shaded or a variation in shade within a part		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
IV. COMPONENT(S) AND ASSEMBLY		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified (type, size, color, etc.)	X	
c. Any ravelling of rack stitching at bottom edge of cap, when applicable		X
d. Any operation not performed as specified (unless otherwise classified herein)		X
V. SEAMS AND STITCHING		
a. Seam puckered, irregular, twisted, pleated or wavy		X
b. Not specified seam or stitch type		X
c. Any open seam	X	
NOTE: The seam shall be classified as open when one or more broken stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.		
d. Any line of stitching omitted, e.g., insertion of a dart seam	X	
e. Any line of stitching misplaced or not beginning or ending where specified, e.g., a dart not meeting at top center of crown		X
f. Any part of cap caught in an unrelated operation	X	
g. Stitches per inch more or less than specified		X
h. Loose tension resulting in a loose seam	X	
i. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
VI. CROWN		
a. Any section of crown visibly off-center		X
b. Any section of crown visibly unequal		X
VII. DARTS		
a. Other than four (4) or six (6), as applicable	X	
b. Any dart seam extending from the top center of crown, finishing less than 1/4 inch or more than 1/2 inch from beginning of body stitching		X
VIII. LABELS		
a. Omitted	X	
b. Misplaced, not attached as specified, or stitching through the printing		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. The knit watch cap shall be examined for dimensional defects. Any dimension that is not within the established tolerance shall be classified as a defect (see 3.11).

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units (DHU) for visual and dimensional examination shall be as follows:

	Inspection level	AQL's Major	AQL's Total
For defects applicable to 4.4.2.1	II	2.5	6.5
For defects applicable to 4.4.2.2	S-4	-	4.0

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged, The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

4.5 Testing of the end item. The methods of testing specified in FED-STD-191 whenever applicable and as listed in Table IV, shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results The lot size shall be expressed in units of one (1) knit watch cap each. The sample size shall be as specified in 4.4.1.2. The sample unit shall be two (2) knit watch caps. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified.

Table IV - End item tests

Characteristic	Requirement Paragraph	Test Method
Knitted fabrics:		
Stitch type for each part	3.4.2	Visual 1/
Wales per inch for each part	3.4.2	5070
Courses per inch for each part	3.4.2	5070
Colorfastness to:		
Light	3.5.2	5660
Laundering	3.5.2	5614
Perspiration	3.5.2	5680
Crocking	3.5.2	AATCC-8
Nonfibrous material	3.6	2611
Weight	3.12	2/

1/ One determination shall be performed on each part, and the results reported as "pass" or "fail".

2/ A knit watch cap shall be allowed to reach equilibrium under standard conditions as defined in FED-STD-191. When under standard conditions, the cap shall be weighed to the nearest 1/4 ounce.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Ten (10) knit watch caps shall be neatly flattened and stacked one on top of the other with every fifth (5) cap reversed to form a bundle. Each bundle shall be securely tied around the girth with cotton twine or cloth tape, approximately 2-1/2 inches from each end. The finished bundle shall be approximately 11 inches in length, 4 inches in width, and 6-3/4 inches in depth.

5.1.2 Level C. Knit watch caps shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Sixty (60) knit watch caps (6 bundles of 10 each), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, variety DW, class weather-resistant, grade V15C, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packages shall be packed two (2) bundles in length, three (3) bundles in width and one (1) in depth. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Sixty (60) knit watch caps (6 bundles of 10 each), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A, of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level B packages shall be packed two (2) bundles in length, three (3) bundles in width and one (1) in depth. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

* 6.1 Intended use. The items are intended for wear by Naval and Air Force personnel in cold environments.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and lengths required (see 1.2)
c. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
d. Levels of packaging and packing required (see 5.1 and 5.2)
e. When palletization is required (see 5.4)

* 6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.2).

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.5 Subject term (key word) listing.

Cap, Blue 3346
Cap, cold weather
Cap, crewman
Cap, knitted
Cap, wool

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU
Air Force - 99

Review Activity:
DLA - CT
Navy - MC
Air Force - 82

User Activity:
Air Force - 45

Preparing Activity:
Navy - NU

Project No. 8405-0071

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

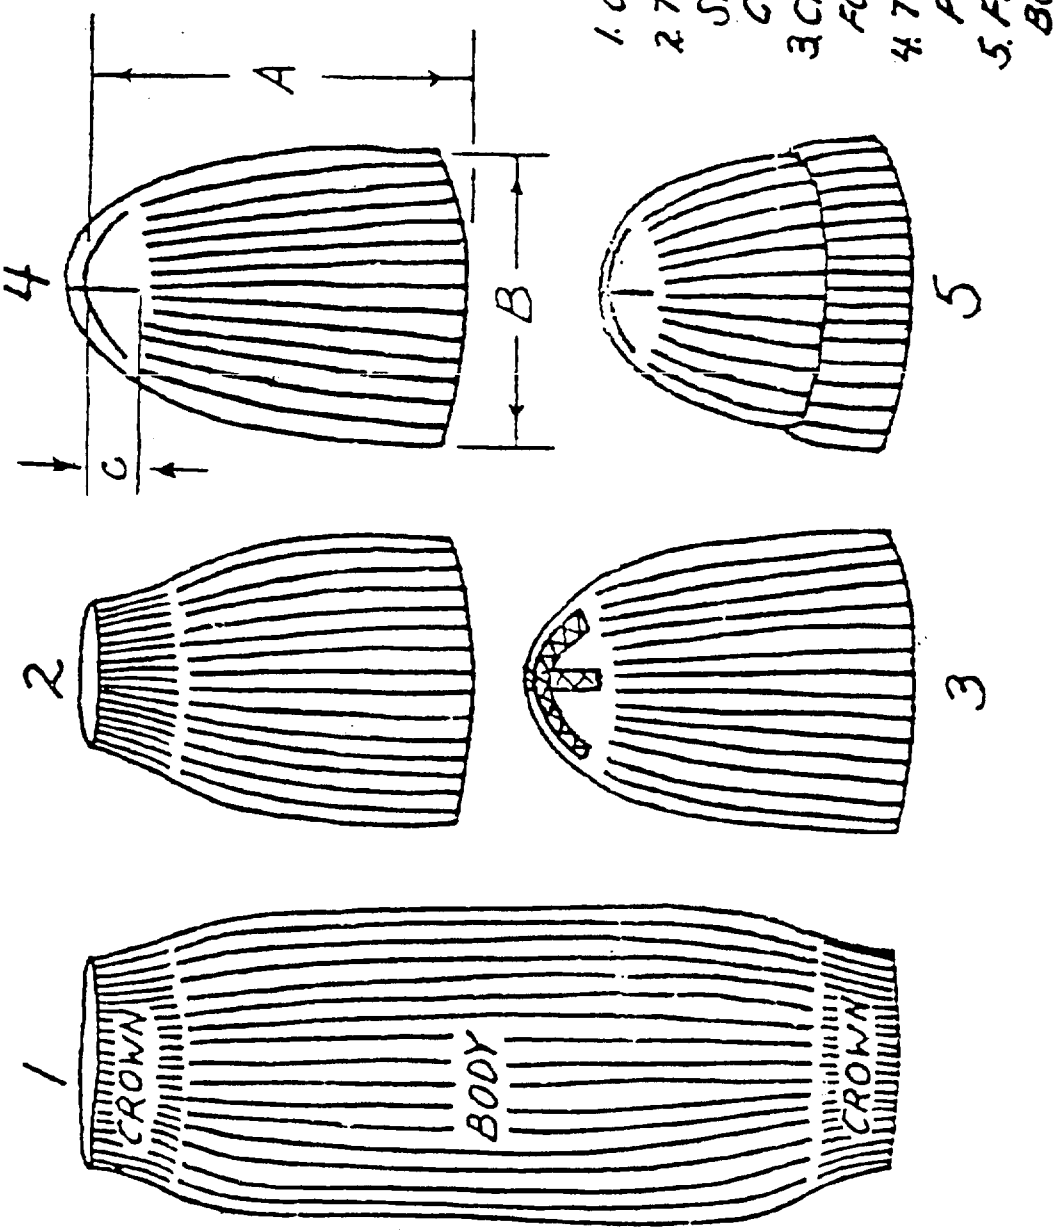


FIGURE 1 - SIMULATED 2 PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

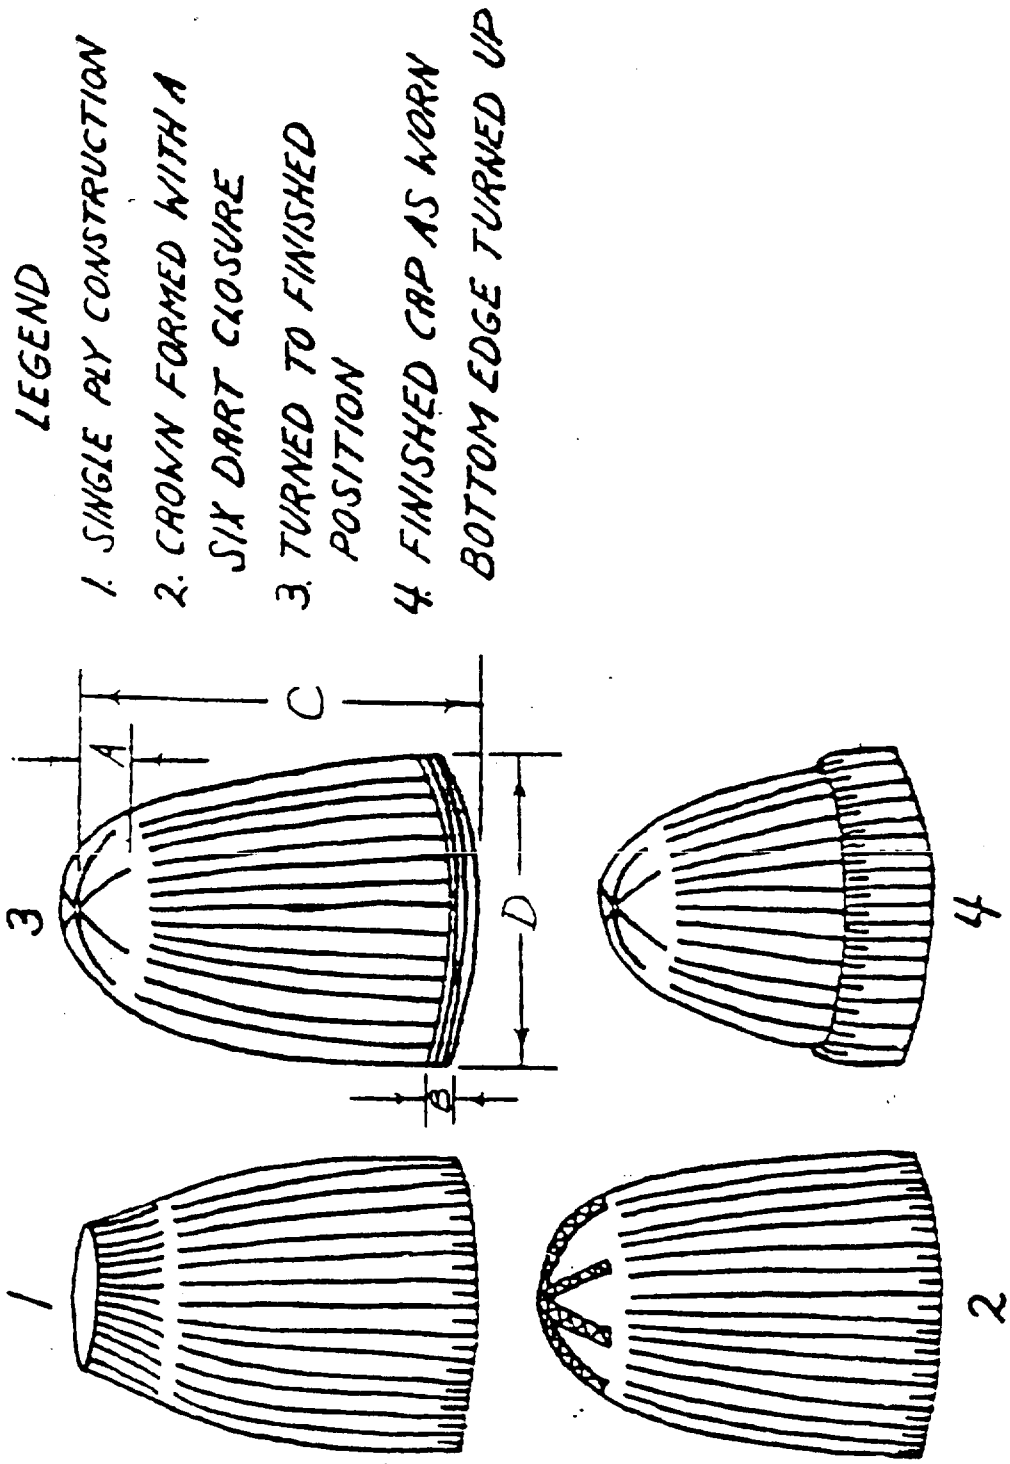


FIGURE 2. SINGLE PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Natick, Mass. 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-16472H	CAP, KNIT (WATCH)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.