NOT MEASUREMENT SENSITIVE


MIL-B-3628/72B
14 September 1990
SUPERSEDING
MIL-B-3628/72A
9 March 1989

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, MISSILE WITH OPERATIONS CREW DESIGNATOR, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

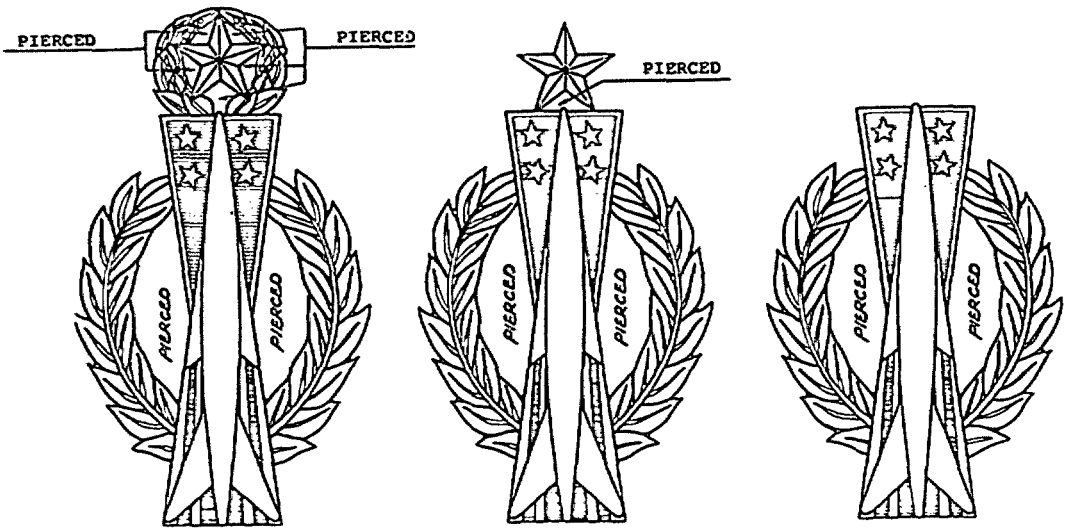

MASTER SENIOR BASIC

MATERIAL: Red bras or nickel silver

DASH NO:
-1: Basic, Regular Size
-2: Senior, Regular Size
-3: Master, Regular Size
-4: Basic, Miniature Size
-5: Senior, Miniature Size
-6: Master, Miniature Size

DIMENSIONS:
HEIGHT (Overall):
-1: 2-1/2 inches (6.35 cm) (REF)
-2: 3 inches (7.62 cm) (REF)
-3: 3-1/8 inches (7.94 cm) (REF)
-4: 1-25/32 inches (4.52 cm) (REF)
-5: 2-1/8 inches (5.40 cm) (REF)
-6: 2-1/4 inches (5.72 cm) (REF)
WIDTH (Overall):
-1,-2,-3: 1-3/4 inches (4.45 cm) (REF)
-4,-5,-6: 1-3/16 inches (3.02 cm) (REF)
THICKNESS (Assembled):
-1,-2,-3: .200 inch ± .010 inch (0.508 cm ± 0.025 cm)
-4,-5,-6: .165 inch ± .010 inch (0.673 cm ± 0.025 cm)
THICKNESS (At edge):
-1,-2,-3: .075 inch ± .005 inch (0.190 cm ± 0.012 cm)
-4,-5,-6: .063 inch ± .005 inch (0.160 cm ± 0.012 cm)

FINISH: Nickel plated (red brass only), silver plated.
BASE: Oxidized, relieved, matte finish.
MISSILE: Matte finish.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. The missile for regular size badges (Dash No. 1, 2 and 3) shall be superimposed and secured to the base by two hollow rivets. The rivets shall be located on the vertical centerline of the missile, equidistance from each end and 1 inch ± 1/16 inch (2.54 cm ± 0.16 cm) apart. The missile for miniature size badges (Dash No. 4, 5 and 6) shall be superimposed and secured to the base by one hollow rivet. The rivet shall be centered on the vertical centerline of the missile.

2. A forcer may be used to bring up the missile, star and wreath. When a forcer is used to bring up the star, the prong located at the center of the star shall have a free length of 5/16 inch (2.38 cm) when measured from the back of the badge to the tip of the prong.

3. Attaching device shall be prong and clutch type located as follows:

   a. Dash No. 1 and 4: The prongs shall be located on the vertical centerline of the badge, equidistance from each end and 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart for Dash No. 1 and 1-3/8 inch ± 1/64 inch (3.49 cm ± 0.04 cm) apart for Dash No. 4.

   b. Dash No. 2 and 3: The prongs shall be located on the vertical centerline of the badge with the top prong centered on the star and the lower prong 1/4 inch ± 1/64 inch (0.48 cm ± 0.04 cm) from the bottom of the badge.

   c. Dash No. 5 and 6: The prongs shall be located on the vertical centerline of the badge with the top prong centered on the star and the lower prong 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) from the bottom of the badge.

4. The missile and base shall be lacquered prior to assembly. After assembly the badge shall be lacquered again.

5. Badges may be nickel or rhodium plated with a mirror-like polished finish for commercial sale.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.