NOT MEASUREMENT SENSITIVE


MIL-B-3628/79A
30 July 1993
SUPERSEDING
MIL-B-3628/79
28 May 1991

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE IN COMPETITION, RIFLEMAN NATIONAL, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

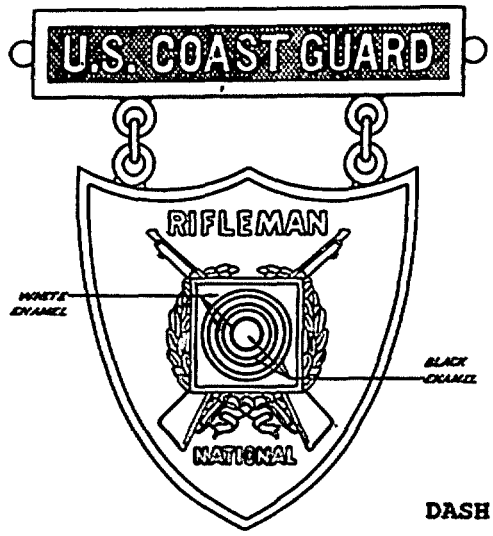

MATERIAL:
PENDANT: Gilding Metal
SUSPENSION BAR:
-1: Gilding Metal
-2: Gilding Metal or Red Brass

DASH NO:
-1: Bronze, 1st Award
-2: Silver, 2nd Award

FINISH:
PENDANT:
-1: Hard Enamelled, Oxidized, Relieved, Highlights and Rim Highly Polished. REVERSE: Mirror-like Polished. Lacquered Front, Back and Edges.

-2: Hard Enamelled, Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Highly Polished and shall match TIOH Metal Finish Chip Number 13. REVERSE: Nickel Plated, Silver Plated, Mirror-like Polished. Lacquered Front, Back and Edges.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:23Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:

-1: Hard Enamelled, Oxidized, Relieved, Highlights and Rim Highly Polished. REVERSE: Mirror-like Polished. Lacquered Front, Back and Edges.

-2: Hard Enamelled, Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Highly Polished and shall match TIOH Metal Finish Chip Number 13. REVERSE: Nickel Plated, Silver Plated, Mirror-like Polished. Lacquered Front, Back and Edges.

DIMENSIONS:

PENDANT:

HEIGHT (Overall): 1-7/16 inch (3.65 cm) (REF)
WIDTH (Overall): 1-23/64 inch (3.43 cm (REF)
THICKNESS (Edge): 0.085 inch ± 0.010 inch (0.190 cm ± 0.025 cm)

SUSPENSION BAR:

HEIGHT (Overall): 11/32 inch (0.87 cm) (REF)
WIDTH (Overall): 1-7/8 inch (4.76 cm) (REF)
THICKNESS (Edge): 0.075 inch ± 0.010 inch (0.215 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline of the suspension bar, equidistant from each end and 1-1/2 inches ± 1/32 inch (3.81 cm ± 0.08 cm) apart.

5. All lugs are integral. The links shall be fabricated from copper wire for Dash No. 1 and silver plated wire for Dash No 2 with a nominal diameter of 0.050 inch (0.127 cm). The overall dimension of the links shall be 1/4 inch (0.64 cm) in length and 7/32 inch (0.56 cm) in width.

Custodian:
Army - IH
Coast Guard - CG

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:23Z
Check the source to verify that this is the current version before use.