NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/80E
19 August 2022
SUPERSEDING
MIL-DTL-3628/80D
19 June 2019

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE IN COMPETITION, PISTOL SHOT NATIONAL, U. S. COAST GUARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

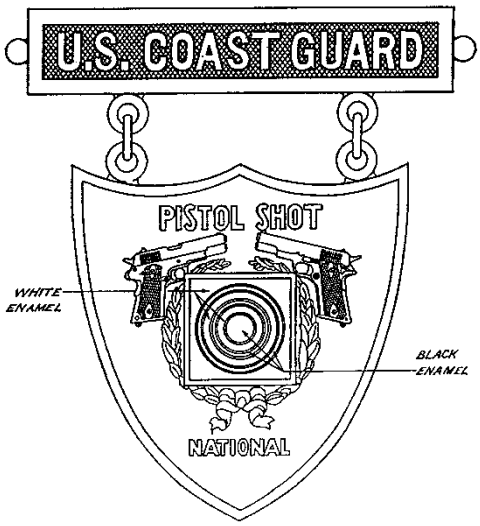

DASH NO.
-1: Bronze, 1st Award
-2: Silver, 2nd Award

MATERIAL:
PENDANT: Gilding Metal 95/5 (UNS Alloy No. C-210)
SUSPENSION BAR:
-1: Gilding Metal 95/5 (UNS Alloy No. C-210)
-2: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No.C210)

FINISH:

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:23Z
Check the source to verify that this is the current version before use.

PENDANT:

-1 OBVERSE: Epoxy resin (Stoning epoxy), Brass, Oxidized, Buffed Relieved, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 5.
REVERSE: Highly Polished, Lacquered, Front, Back Edges.

-2 OBVERSE: Epoxy resin (Stoning epoxy), Nickel Plated, Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13, and Rim Highly Polished.
REVERSE: Nickel Plated, Silver Plated, Mirror-like Polished, Lacquered Front, Back, and Edges.

SUSPENSION BAR:

-1 OBVERSE: Brass, Oxidized, Buffed Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 5, and Rim Highly Polished.
REVERSE: Nickel Plated, Mirror-like Polished, Lacquered Front, Back, and Edges.

-2 OBVERSE: Nickel Plated, Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13, and Rim Highly Polished.
REVERSE: Nickel Plated, Silver Plated, Mirror-Like Polished Lacquered Front, Back and Edges.

DIMENSIONS:

PENDANT:
HEIGHT (Overall): 1-7/16 inches (REF)
WIDTH (Overall): 1-23/64 inches (REF)
THICKNESS: (Edge): 0.085 inch $\pm$ 0.010 inch

SUSPENSION BAR:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 1-7/8 inches (REF)
THICKNESS (Edge): 0.075 inch $\pm$ 0.010 inch

ATTACHING DEVICE AND LUGS:

1. The links shall be fabricated from copper wire for -1 and silver plated wire for -2 with a nominal diameter of 0.050 inch. The overall dimension of the links shall be 1/4 inch $\pm$ 1/64 inch in length and 7/32 inch $\pm$ 1/64 inch in width.

2. The attaching device shall be prong and clutch type.

3. The prongs and clutch shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1- 1/2 inch $\pm$ 1/32 inch apart.

4. All lugs are integral.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:23Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

NOTES:

1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - CG1

Preparing activity:
Navy - CG1

Review activity:
DLA - CT

(Project No. 8455-2022-167)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:23Z
Check the source to verify that this is the current version before use.