INCH-POUND

MIL-DTL-3628/82C
20 March 2003
SUPERSEDING
MIL-DTL-3628/82B
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

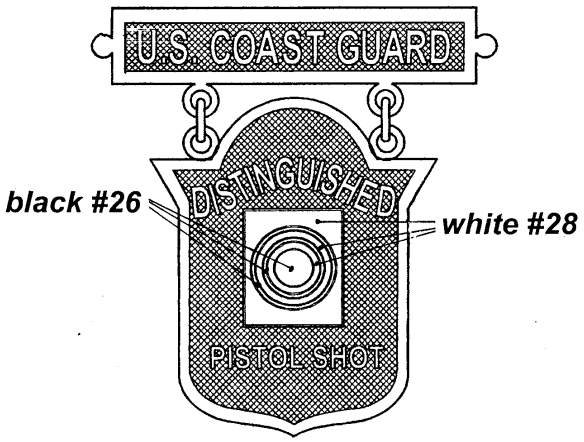

MATERIAL:

PENDANT: Gilding Metal
SUSPENSION BAR: Gilding Metal or Red Brass

FINISH:

PENDANT OBVERSE: Hard Enameled or Epoxied, Gold Plated, Matte Finished, Highlights and Rim Highly Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
PENDANT REVERSE: Gold Plated, Matte Finished, Rim Highly Polished, and shall match TIOH Metal Finish Chip Number 8.

SUSPENSION BAR OBVERSE: Hard Enameled or Epoxied, Gold Plated, Matte Finished, Highlights and Rim Highly Polished, and shall match TIOH Metal Finish Chip Number 8.
SUSPENSION BAR REVERSE: Gold Plated, Matte Finished, and shall match TIOH Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:
HEIGHT (overall): 1-5/16 inches (REF)
WIDTH (at widest point): 1-1/8 inches (REF)
THICKNESS (at edge): 0.100 inch ± 0.005 inch

SUSPENSION BAR:
HEIGHT: 9/32 inch (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (at edge) 0.075 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled/epoxied areas shall be as indicated. The color shall conform to TIOH Hard Enamel Color Chip numbers listed below:

COLOR	CHIP NUMBER
Black	26
White	28

3. Attaching device shall be prong and clutch type. Two prongs shall be located on the horizontal centerline of the suspense bar, equidistant from each end and 1-5/16 inches apart.

4. Jump rings shall have a nominal diameter of 0.035 inch and shall be made from gold plated wire with a nominal diameter of 0.050 inch:

- Suspension bar jump rings shall be soldered to the bottom of the suspension bar at a location 11/32 inch in from the outside edge of the rim (as shown).
- Pendant bar jump rings shall be soldered centered in the top inside corner of the shield (as shown).

5. The links shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The overall dimension of the links shall be 1/4 inch ± 1/64 inch in length and 7/32 inch ± 1/64 inch in width.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Coast Guard - CG

Preparing activity:
Army - IH

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.

Review activities:
DLA - CT

(Project No. 8455-0111/002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.