NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/82F
19 August 2022
SUPERSEDING
MIL-DTL-3628/82E
29 May 2019

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, U. S. COAST GUARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

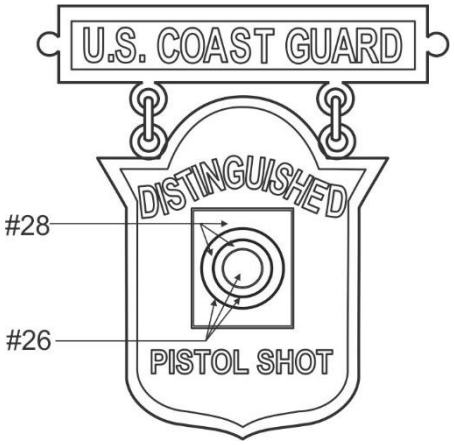

MATERIAL:
PENDANT: Gilding Metal 95/5 (UNS Alloy No. C-210)
SUSPENSION BAR: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No.C210)

FINISH:
PENDANT:
OBVERSE: Epoxy resin (Stoning epoxy), 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
REVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8
SUSPENSION BAR:
OBVERSE: Epoxy resin (Stoning epoxy), 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 1-5/16 inches (REF)
WIDTH (Overall): 1-1/8 inches (REF)
THICKNESS: (Edge): 0.100 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (Overall): 9/32 inch (REF)
WIDTH (Overall): 1-1/2 inches (REF)
THICKNESS (Edge): 0.075 inch ± 0.010 inch

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

ATTACHING DEVICE AND LUGS:
1. The attaching device shall be prong and clutch type.

2. The prongs shall be located on the horizontal centerline of the suspense bar equidistant from each end and 1-5/16 inches apart.

3. The links shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The overall dimension of the links shall be 1/4 inch ± 1/64 inch in length and 7/32 inch ± 1/64 inch in width.

4. Jump rings shall have a nominal diameter of 0.035 inch and shall be made from gold plated wire with a nominal diameter of 0.050 inch.

-Suspension bar jump rings shall be soldered to the bottom of the suspension bar at a location 11/32 inch in from the outside edge of the rim (as shown).
-Pendant bar jump rings shall be soldered centered in the top inside corner of the shield (as shown).

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - CG1

Preparing activity:
Navy - CG1

Review activity:
DLA - CT

(Project No. 8455-2022-169)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:24Z
Check the source to verify that this is the current version before use.