MIL-C-17/124B
9 October 1979
SUPERSEDING
MIL-C-17/124A
20 August 1974

MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, TRIAXIAL, PULSE,
25 OHMS, M17/124-RG328

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cables described herein shall consist of this document and the latest issue of Specification MIL-C-17.

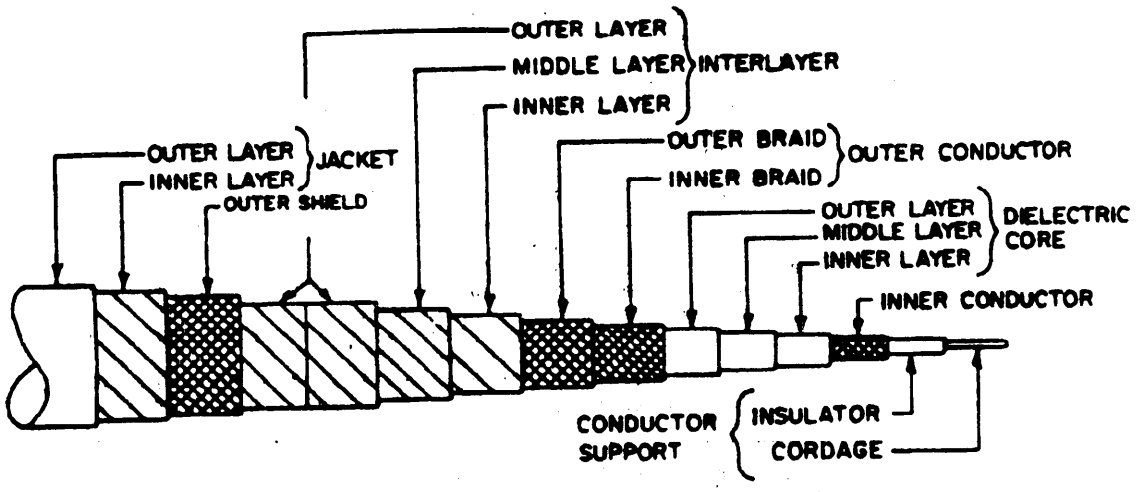


FIGURE 1. Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:13Z
Check the source to verify that this is the current version before use.

FSC 6145

TABLE I. Description.

Components	Construction details
Conductor support Carrier Insulator	Cordage #EC9-4 per MIL-Y-1140 or equivalent. Diameter: .054 inch, nominal Type J: Insulating synthetic rubber. Diameter: .420 inch ±.010.
Inner conductor	Single braid of AWG #30, tinned, copper wire. Diameter: .485 inch maximum. Coverage: 93.9%, nominal. Carriers: 24 Ends: 8 Picks/inch: 4.5 ±10%.
Dielectric core Inner layer Middle layer Outer layer	Composite of three layers. Type H: Semiconducting synthetic rubber. Diameter: .510 inch ±.015. Type J: Insulating synthetic rubber. Diameter: 1.000 inch ±.015. Type H: Semiconducting synthetic rubber. Colored, black. Diameter: 1.065 inch ±.020.
Outer conductor Inner braid Outer braid	Double braid of wires. Diameter: 1.165 inch, maximum. Wire: AWG #30, tinned, copper wire. Coverage: 94.5%, nominal. Carriers: 48 Ends: 9 Picks/inch: 5.5 ±10% Wire: .007 inch, galvanized, steel wire. Coverage: 94.1%, nominal. Carriers: 48 Ends: 12 Picks/inch: 6.7 ±10%
Interlayer Inner layer Middle layer Outer layer	Composite of three layers. Diameter: 1.205 inch ±.020. Type K: One wrap of polyethylene terephthalate tape, .005 inch thick by 1-inch wide. Type K: One wrap of polyethylene terephthalate tape, .003 inch thick, by 1-inch wide. Type L: Two wraps of rubber-treated fiberglass tapes, .007 inch thick each by 1-inch wide, butted against each other.
Outer shield	Single braid of AWG #30, tinned, copper wire. Diameter: 1.275 inch, maximum. Coverage: 91.9%, nominal. Carriers: 48 Ends: 9 Picks/inch: 5.6 ±10%
Jacket Inner layer Outer layer	Composite of two layers. Diameter: 1.460 inch ±.020. Type K: One wrap of polyethylene terephthalate tape, .001 inch thick by 1-inch wide, with a 33% minimum overlay. Type VIII.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:13Z
Check the source to verify that this is the current version before use.

Repeatability: Not applicable.

Engineering information:

Continuous working voltage: 15,000 Vrms, maximum.
Operating frequency: 3 GHz, maximum.
Velocity of propagation: 49.6 percent, nominal.
Operating temperature range: -10° to +85°C.
Engineering notes: This cable useful in pulse applications (see connector per MIL-C-3607).

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:
Adhesion of conductors: Not applicable.
Aging stability: +98° ±2°C.
Stress crack resistance: Not applicable.
Outer conductor integrity: Not applicable.
Cold bend: -40° ±2°C.
Dimensional stability: Not applicable.
Contamination: Not applicable.
Bendability: Not applicable.
Weight: 160 pounds per 100 feet, maximum.

Electrical:
Test frequency: 50 MHz to 1 GHz.
Spark test: 8,000 Vrms +25%, -0%.
Voltage withstanding: 25,000 Vrms.
Insulation resistance: 10,000 Vrms, minimum.
Corona extinction voltage: 15,000 Vrms, minimum.
Characteristic impedance: 25 ohms ±2.5.
Attenuation: 0.5 dB per 100 feet maximum.
Structural return loss: Not applicable.
Capacitance: 85 pF per foot, maximum.
Capacitance unbalance: Not applicable.
Transmission unbalance: Not applicable.
Mechanically induced noise voltage: Not applicable.
Time delay: Not applicable.

Part number: See table II.

Supersession data: See table II.

TABLE II. Cross reference of part number.

Part number	Superseded part number or type designation
M17/124-RG328	RG328/U

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:13Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - ME, AT, AR
Navy - AS, OS, MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-0716-16)

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:13Z
Check the source to verify that this is the current version before use.