MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, COAXIAL, 0.250 DIAMETER, SEMIRIGID, 50 OHMS, M17/129-RG401 AND M17/129-00001

This amendment forms a part of Military Specification Sheet MIL-C-17/129C, dated 9 October 1979, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Engineering information, Engineering notes, delete and substitute:

"Engineering notes: This cable is useful in critical RF performance applications (see connector series TNC per MIL-C-39012). This cable is generally manufactured in 20-foot lengths. Different lengths are available."

Requirements, Environmental and mechanical, Adhesion of conductors, delete and substitute:

"Adhesion of conductors:

Inner conductor to core: 4 pounds minimum; 100 pounds maximum.

Outer conductor to core: 4 pounds minimum."

PAGE 3

FIGURE 2: Delete and substitute new figure 2 as printed on page 2 of this amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19


Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0835-1)

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:14Z
Check the source to verify that this is the current version before use.

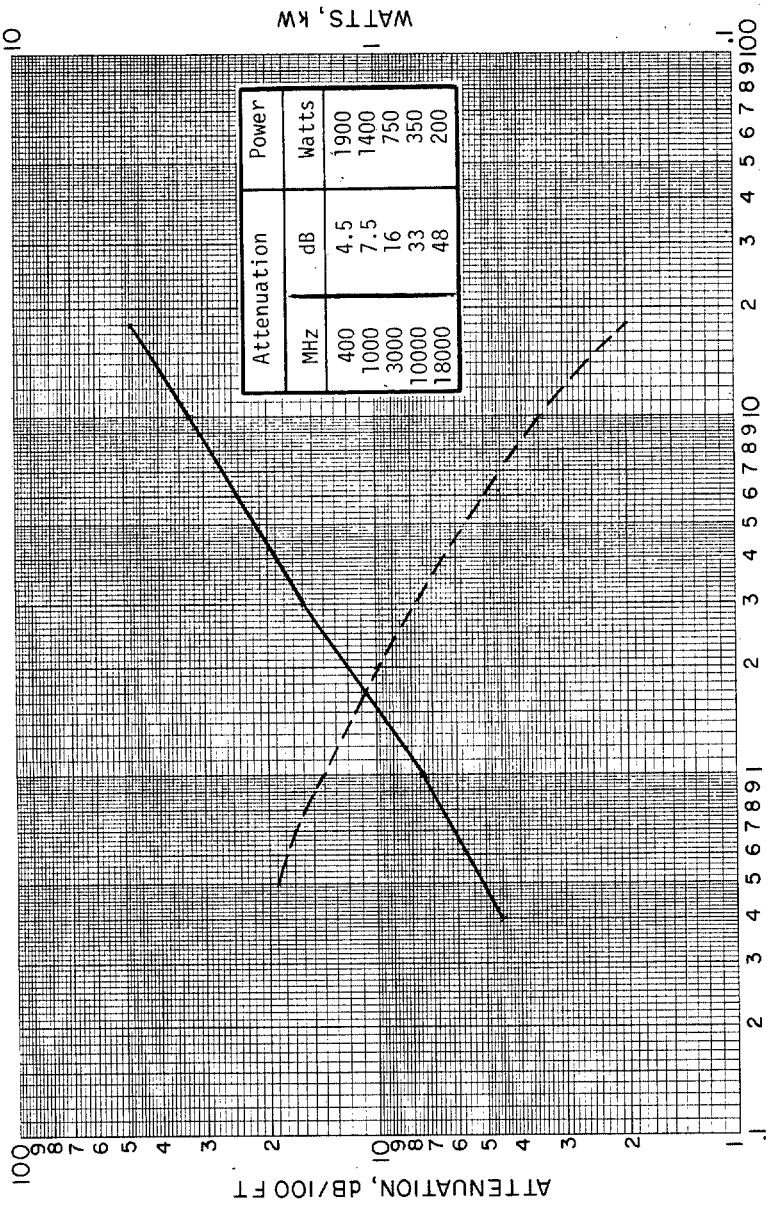

Attenuation		Power
MHz	dB	Watts
400	4.5	1900
1000	7.5	1400
3000	16	750
10000	33	350
18000	48	200

FIGURE 2. Power rating and attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:14Z
Check the source to verify that this is the current version before use.