INCH-POUND

MIL-DTL-17/132C
19 June 2015
SUPERSEDING
MIL-C-17/132B
19 November 1987

MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL, LOW NOISE, 50 OHMS, M17/132-00001

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-17.

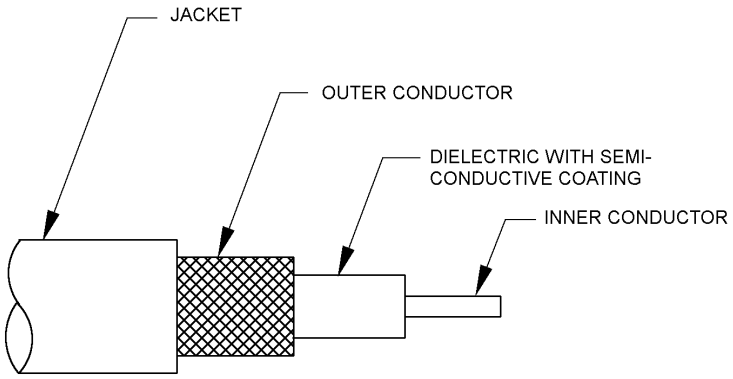

FIGURE 1. Configuration.

TABLE I. Description.

Components	Construction details
Inner conductor	Seven strands of AWG size 38 silver-plated, copper-covered steel wire. Overall diameter: 0.012 ± .001 inch.
Dielectric	Type F-1 with a semiconducting coating. Overall diameter: .036 ± 0.002 inch.
Outer conductor	Silver-coated, AWG size 38 copper strands. Overall diameter: 0.056 inch, maximum. Carriers: 16 Ends: 3 Picks/inch: 25 ± 10 percent.
Jacket	Type IX. Overall diameter: .073 ± .004 inch.

AMSC N/A FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:15Z
Check the source to verify that this is the current version before use.

ENGINEERING INFORMATION:

Continuous working voltage: 1,500 V rms, maximum.
Operating frequency: 1 GHz, maximum.
Velocity of propagation: 68 percent, nominal.
Operating temperature range: -40°C to +200°C.
Inner conductor properties:
DC resistance (maximum at 20°C): 24.45 ohms per 100 feet.
Elongation: 10 percent, minimum.
Tensile strength: 50 $klb_f/inch^2$, minimum.

Engineering notes: This cable is useful in low noise temperature applications.

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:
Adhesion of conductors:
Inner conductor to core: 1 pound, minimum; 4 pounds, maximum.
Aging stability: Not applicable.
Stress crack resistance: +230°C ± 5°C for 76 hours.
Outer conductor integrity: Not applicable.
Cold bend: -55° ± 2°C.
Dimensional stability: +200° ± 5°C.
Inner conductor from core: .062 inch, maximum.
Inner conductor from jacket: .125 inch, maximum.
Contamination: Not applicable.
Bendability: Not applicable.
Weight: 1.65 pounds per 100 feet, maximum.

Electrical:

Test frequency: 50 MHz to 1 GHz.
Spark test: 2,000 Vrms, +25 percent, -0 percent.
Voltage withstanding: 1,500 Vrms, minimum.
Insulation resistance: Not applicable.
Corona extinction voltage: 1,000 V rms, minimum.
Characteristic impedance: 50 ohms ± 2 ohms.
Attenuation: 29dB/100 feet maximum at 400MHz.
Capacitance: 31.5 pF per foot, maximum.
Capacitance unbalance: Not applicable.
Transmission unbalance: Not applicable.
Mechanically induced noise voltage: 25 millivolts, peak to peak maximum.
Time delay: Not applicable.

Part or Identifying Number (PIN): M17/132-RG404.

Supersession data: See table II.

TABLE II. Cross reference of PIN.

PIN	Superseded PIN or type designation
M17/132-RG404	RG-404/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:15Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Referenced documents. This document references MIL-DTL-17.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2015-022)

Review activities:
Army – AT, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:15Z
Check the source to verify that this is the current version before use.