MILITARY SPECIFICATION

COUPLERS, PASSIVE, FIBER OPTIC, 1.31 μm, UNIFORMLY DISTRIBUTIVE, STAND-ALONE WITH MULTIMODE PIGTAILS

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24621.

CLASSIFICATION

Type: 1 (1.31 micrometers (μm)).

Class: A (Uniformly distributive).

Style: 3 (Stand-alone coupler with multimode pigtails).

DESIGN AND CONSTRUCTION

Port construction (input X output): 2X2.

Cable pigtails: In accordance with MIL-C-85045/14, using 62.5/125 μm fiber surrounded by aramid strength members and an outer jacket.

Housing: See figure 1.

Dimensions: See figure 1. All dimensions shall have a tolerance of plus or minus 1 millimeter (mm).

Weight: ≤ 50 grams.

Color: Gray.

AMSC N/A FSC 6005
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:23Z
Check the source to verify that this is the current version before use.


PERFORMANCE REQUIREMENTS

Optical transmittance: See table I.

Polarization sensitivity: N/A.

Environmental:

Temperature range: 2 (minus 28 to plus 65°C, operating; minus 62 to plus 71°C, storage).

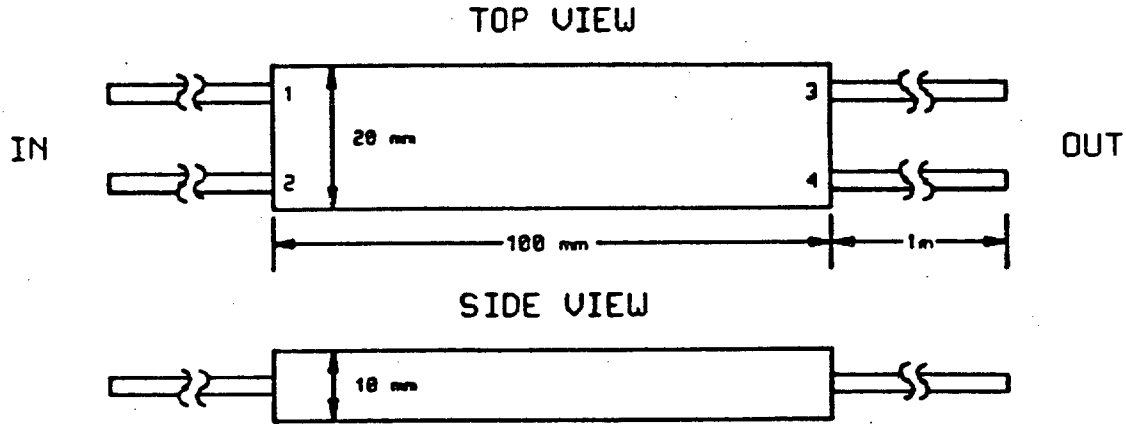

Port 1 - Primary input
Port 2 - Secondary input
Port 3 - Output # 1
Port 4 - Output # 2

SH 13232053

FIGURE 1. 2X2 coupler.

TABLE I. Optical transmittance decibel (dB) matrix.

PORT	1	2	3	4
1	-30.0	-30.0	-3.8	-3.8
2	-30.0	-30.0	-3.8	-3.8
3	-3.8	-3.8	-30.0	-30.0
4	-3.8	-3.8	-30.0	-30.0

PART NUMBER: D24621/05-001.

PART DESIGNATOR: 1A3.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6005-N001-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:23Z
Check the source to verify that this is the current version before use.