INCH-POUND

MIL-H-24606A(SH)
AMENDMENT 1
28 June 1991

MILITARY SPECIFICATION

HOSE ASSEMBLIES, CHLOROSULFONATED POLYETHYLENE IMPREGNATED, DOUBLE SYNTHETIC JACKET, WITH COUPLINGS, FIRE FIGHTING AND OTHER WATER SERVICE

This amendment forms a part of MIL-H-24606A(SH), dated 6 December 1985, and is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

2.2 Add "B 134 - Brass wire,

PAGE 6

3.3.6: Delete and substitute:

"3.3.6 Couplings and gaskets. Unless otherwise specified (see 6.2.1) each length of hose shall be fitted with a set (one male and one female) of case or forged couplings, with rubber gaskets. Couplings shall conform to type A, style 1 of WW-C-621 and as follows. The female swivel shall be held on to the coupling bowl by snap ring or ball bearing as indicated in Table VI. Coupling threads shall be as indicated in Table VI.

Table VI: Delete and substitute:

"Table VI. Coupling threads/swivel retention.

Size	Thread designation	Swivel retention
150	1-1/2 - 11-1/2 NPSH	Snap ring
175	1-1/2 - 11-1/2 NPSH	Snap ring
250	2-1/2 - 7-1/2 NH	Snap ring
300	3 - 6 NH	Ball bearing
350	3-1/2 - 6 NH	Ball bearing
400	4 - 6 NH	Ball bearing"

AMSC N/A FSC 4210
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:15Z
Check the source to verify that this is the current version before use.

PAGE 6

3.3.6.1: Add as new paragraph:

"3.3.6.1 Snap ring. Snap rings shall be fabricated of spring brass, alloy C26000 of ASTM B134. Snap rings shall be either square or rectangular. No other cross section is acceptable. Snap ring and snap ring groove dimensions shall be in accordance with Figure 1. Snap ring shall have a minimum of 50 percent engagement with the swivel."

3.3.6.2: Add as new paragraph:

"3.3.6.2 Ball bearing. Retaining balls for sizes 300 and larger couplings shall be fabricated of grade 1000 Naval Brass. Bearing insertion hole in the coupling swivel shall be closed with a set screw. Set screw shall be staked to prevent."

3.3.6.3: Add as new paragraph:

"3.3.6.3 Washers. Washers shall be inserted at the face of the expansion ring in both the female and male coupling bowls and in the swivel ring of the female coupling."

PAGE 7

Table VII, Under "Proof pressure" for "Size 400", delete "600" and substitute "400".

Table XI: Add as new Table XI:

TABLE XI. Service test pressure.

Hose size	Service test pressure (psi)
150	300
175	300
250	300
300	300
350	300
400	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:15Z
Check the source to verify that this is the current version before use.

PAGE 7


3.6, Delete "(c). Tested to 600 lb/in^2." and substitute "(c). Service test pressure (see Table XI)."


LAST PAGE

Figure 1: Add as new Figure 1 (see Figure 1 on page 4 of this amendment).


Preparing Activity:
Navy - SH
(Project 4210-N447)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:15Z
Check the source to verify that this is the current version before use.

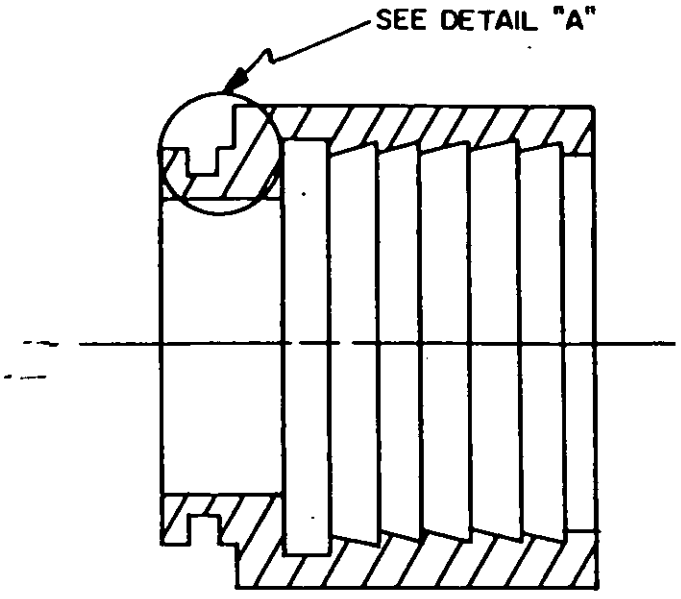

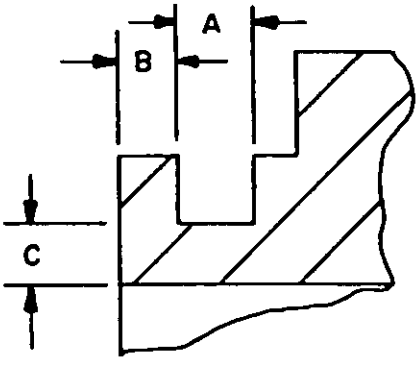

DETAIL "A"

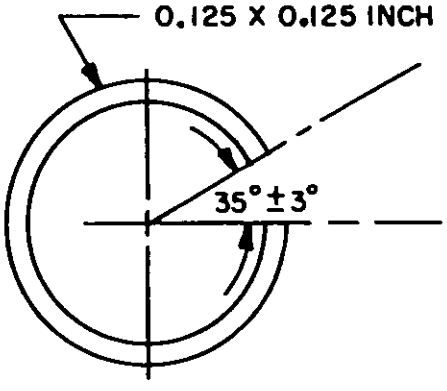

Snap-Ring groove

SIZE	A(MAX)	B(MIN)	C(MIN)
150	0.148	0.110	0.179
175	0.148	0.110	0.179
250	0.145	0.110	0.179

Note: Sizes 300 and larger use ball bearing to retain swivel.

Snap ring may be square or rectangular. No other cross section is acceptable. When assembled, the snap ring shall have a 50 to 60% engagement with the female swivel.

Snap ring must be flat to within 0.047 inch.

Figure 1. Snap-Ring Groove and Snap Ring Details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:15Z
Check the source to verify that this is the current version before use.