MIL-H-11665D
5 May 1971
SUPERSEDING
MIL-H-11665C
2 September 1965

MILITARY SPECIFICATION

HOOK, CHOKER: FOR FERRULED WIRE ROPE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two sizes of choker hooks.

1.2 Classification. The hooks shall be of the following sizes, as specified:

Size 1 - For use with 1/2-inch to 3/4-inch (inclusive) wire rope.
Size 2 - For use with 7/8-inch to 1-1/8-inch (inclusive) wire rope.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U. S. Military Property.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

A128 - Austenitic Manganese-Steel Castings.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Description. The hook shall be a narrow-throated casting capable of engaging the ferrule of a wire rope sling and shall be of the size specified. The hook shall have the functional shape shown in figure 1. The hook shall firmly engage the ferrule of a wire rope sling under load and shall not unlock after engagement. The hook shall be capable of being readily detached from the sling ferrule when the load is released.

3.2 First article.

3.2.1 Preproduction model. The supplier shall furnish a hook for examination and test within the time frame specified to prove, prior to starting production, that his production methods and choice of design detail will produce hooks that comply with the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. The hook shall be an austenitic manganese steel casting conforming to ASTM A128.

3.4 Proof load. The size 1 hook shall withstand a proof load of 56,000 pounds and the size 2 hook shall withstand a proof load of 92,000 pounds without deformation, breaking or cracking.

3.5 Dimensions. The dimensions of the hook shall be as shown on figure 1 with a tolerance of plus or minus 1/32 inch.

3.6 Weight. The size 1 hook shall weigh not more than 9 pounds and the size 2 hook shall weigh not more than 17 pounds.

3.7 Identification marking. The hook shall be identified in accordance with MIL-STD-130.

3.8 Workmanship. The hook shall be cast in one piece and there shall be no cracks, seams, or casting fins on the hook. Edges shall be smooth and free of nicks. There shall be no visible evidence of pipe or included foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction hook shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction hook shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling.

4.4.1.1 For examination. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.1.2 For tests. Sampling for tests shall be in accordance with MIL-STD-105, inspection level S-2.

4.4.2 Examination. Samples selected in accordance with 4.4.1.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.3 Test. Samples selected in accordance with 4.4.1.2 shall be tested as specified in 4.5.2. AQL shall be 10.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The hooks shall be examined for the following defects:

101. Functional shape not as specified.
102. Dimensions not as specified.
103. Weight exceeding the maximum specified.
104. Marking not as specified.
105. Workmanship not as specified.

4.5.2 Test. Attach the hook to the maximum size wire rope sling for the size hook being tested. Position the ferrule to insure locking in the hook, and apply a load not less than that specified in 3.4 for the size hook being tested. Allow load to remain on the hook and sling for not less than 1 minute, then release the load tension and unlock the hook from the ferrule without the use of any tools. Examine the hook for cracks and breaks in the casting and for deformation. Inability of the hook to unlock readily from the ferrule, or evidence of cracking, breaking, or deformation of the hook shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 4.0 percent defective.

106.	Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
107.	Strapping not zinc coated for level A.
108.	Marking illegible, incomplete, incorrect, or missing.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C as specified.

5.1.1 Level A. The hooks shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional. Blocking, bracing, and anchoring shall be in accordance with MIL-STD-1186. Strapping shall be zinc coated.

5.1.2 Level B. The hooks shall be packed as specified for level A, except that the boxes shall be domestic type and strapping will not be required to be zinc coated.

5.1.3 Level C. The hooks shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.2 Marking. Shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The choker hooks are intended for use with wire rope slings to provide a locked noose about a load when under tension.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size of hook required (see 1.2).
(c) Time frame required for submission of preproduction model (see 3.2.1).
(d) Level of packing required (see 5.1)

6.3 Preproduction model. Any changes or deviations of production hooks from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish hooks conforming to this specification.

Custodians:

Army - ME
Navy - YD

Review activity:


Navy - SA


Preparing activity:

Army - ME

Project No. 4030-0129

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

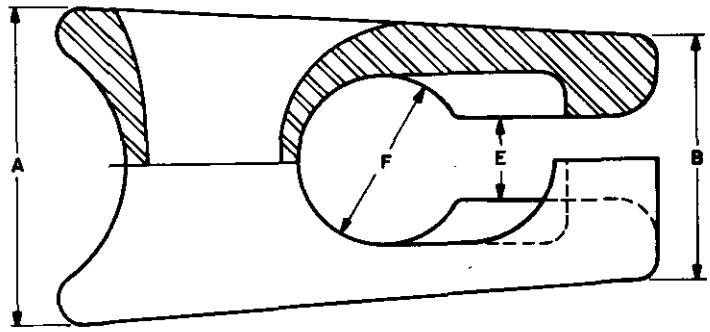

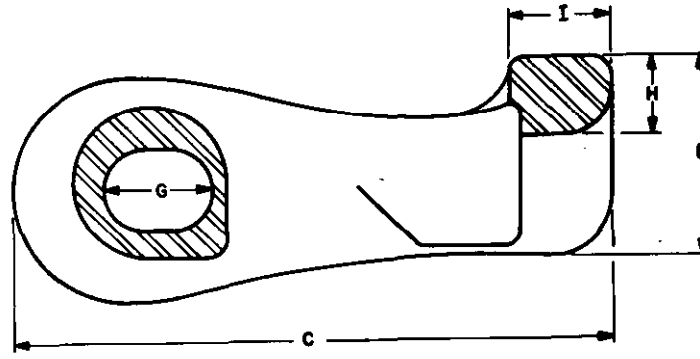

DIMENSIONS					
	SIZE			SIZE	
	1	2		1	2
	INCHES	INCHES		INCHES	INCHES
A	$3\frac{5}{8}$	$4\frac{3}{4}$	E	$\frac{7}{8}$	$1\frac{1}{4}$
B	$2\frac{1}{2}$	$3\frac{3}{4}$	F	$1\frac{13}{16}$	$2\frac{11}{16}$
C	$6\frac{1}{4}$	$8\frac{9}{16}$	G	$1\frac{1}{8}$	$1\frac{5}{8}$
D	$2\frac{7}{32}$	$3\frac{1}{4}$	H	$\frac{13}{16}$	$1\frac{1}{4}$
			I	1	$1\frac{3}{8}$

FIGURE 1. HOOK, CHOKER

X-265

☆ U. S. GOVERNMENT PRINTING OFFICE : 1971—433-698/6926

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-H-11665 D Hook, Choker: for Ferruled Wire Rope

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:49Z
Check the source to verify that this is the current version before use.