NOT MEASUREMENT SENSITIVE
MIL-L-11484/55B
13 October 1989
SUPERSEDING
MIL-L-11484/55A
30 September 1969

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

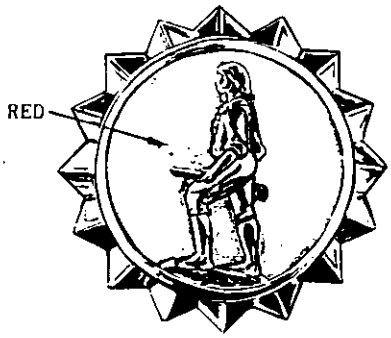

MATERIAL: Gilding Metal

DIMENSIONS INCHES (METRIC)

BASE:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS (On enameled platform): .060 inch (0.152 cm) ± .010 inch (0.025 cm)
MINUTEMAN:
HEIGHT (Overall): 13/32 inch (1.03 cm) (REF)
THICKNESS (At center): .060 inch (0.152 cm) ± .010 inch (0.025 cm)
TOTAL THICKNESS (At center): .120 inch (0.304 cm) ± .010 inch (0.025 cm)

FINISH:

BASE: ENAMELED, GOLD PLATED, MIRRORLIKE POLISHED
MINUTEMAN: GOLD PLATED, BRIGHTLY POLISHED

NOTES:

1. Enameled area shall be as indicated.
2. The red enamel shall match TIOH color chip No. 1.
3. The minute man device shall be centered in the enameled area and shall be attached to the base by soft soldering or by riveting. If riveting is used, two rivets shall be required.
4. The attaching device shall be a prong with pick and wing type clutch.
5. The prong shall be centered on and soldered or fused to the back of the lapel button.
6. Epoxy resin may be used in lieu of vitreous enamel. The epoxy resin shall be a stoning epoxy and have a minimum shore "D" hardness of 85 and incorporate an ultra violet inhibitor.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-A432)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-17T16:22Z
Check the source to verify that this is the current version before use.