NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/55D
27 September 1996
SUPERSEDING
MIL-L-11484/55C
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

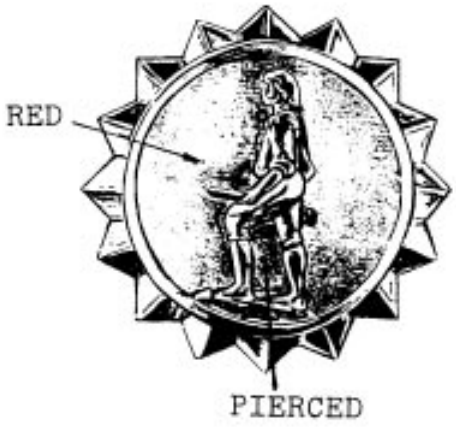

MATERIAL: Gilding Medal

FINISH:
BASE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

MINUTEMAN: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS (On Enameled Platform): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:22Z
Check the source to verify that this is the current version before use.

MINUTEMAN:
HEIGHT (Overall): 13/32 inch (1.03 cm) (REF)
WIDTH (At Widest Point): 11/64 inch (0.44 cm) (REF)
THICKNESS (At Center): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

TOTAL THICKNESS (At Center): 0.120 inch ± 0.010 inch (0.304 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled area shall be red as indicated. The color shall conform to the TIOH color chip number 1 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The minuteman device shall be pierced between the legs as indicated. The device shall be centered in the enameled area and attached to the base by soft soldering or by riveting. If riveting is used, two rivets shall be required.

5. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:22Z
Check the source to verify that this is the current version before use.