NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/56D
27 September 1996
SUPERSEDING
MIL-L-11484/56C
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, FLEET MARINE CORPS RESERVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

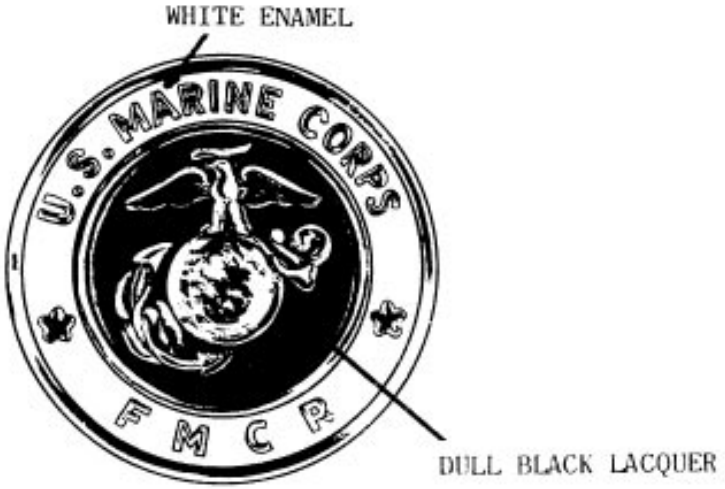


MATERIAL: Gilding Medal

DIMENSIONS:
DIAMETER: 19/32 inch (1.51 cm) (REF)
THICKNESS (At Edge): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights with Dull Black Lacquer and shall match TIOH Metal Finish Chip Number 8.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:22Z
Check the source to verify that this is the current version before use.

2. Enameled area shall be white as indicated. The color shall conform to the TIOH color chip number 28 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The dull, flat black lacquer shall match FED-STD-595, Chip Number 37038 or the standard sample.

5. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0858)


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:22Z
Check the source to verify that this is the current version before use.