NOT MEASUREMENT SENSITIVE

MIL-L-11484/59E
14 January 1994
SUPERSEDING
MIL-L-11484/59D
17 January 1992

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, HONORABLE SERVICE (PRIOR TO 8 SEPTEMBER 1939)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that *issue of the Department of Defense Index of Specifications and Standards (DODISS)* specified in the solicitation: MIL-L-11484.

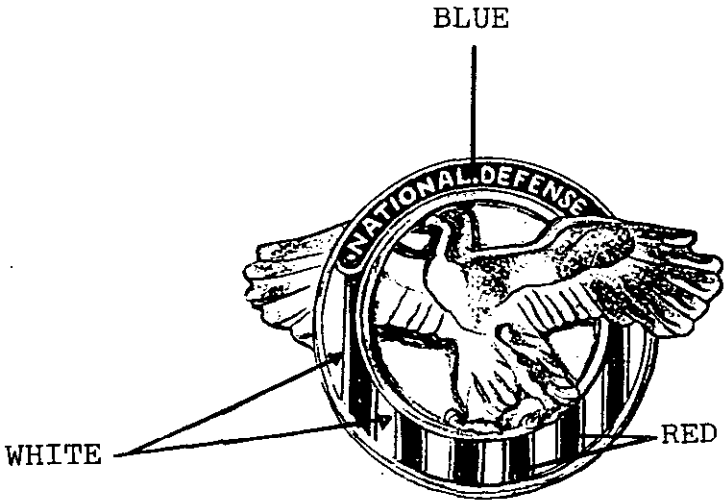

MATERIAL: Gliding Metal

DIMENSIONS:

HEIGHT (Overall): 7/16 inch (1.11 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (At Thickest Point): 0.075 inch ± 0.005 inch (0.190 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T16:24Z
Check the source to verify that this is the current version before use.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Red	1
Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Custodians:
Army - IH
Air Force - 11
Navy - NU
Coast Guard - CG

Review activities:
Air Force - 32, 82, 99
Navy - MC
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0743)

Source: https://assist.dla.mil -- Downloaded: 202610-17T16:24Z
Check the source to verify that this is the current version before use.