INCH - POUND


MIL-DTL-11484/60F
14 March 2018
SUPERSEDING
MIL-DTL-11484/60E
27 September 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, HONORABLE DISCHARGE, U.S. NAVAL RESERVE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

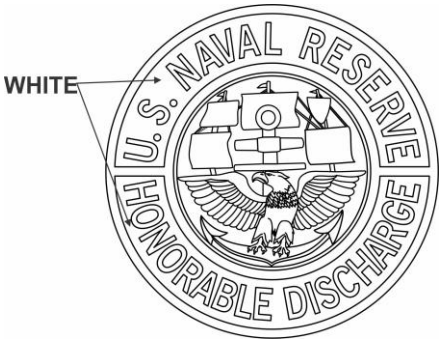

MATERIAL: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH: Epoxy resin (Stoning epoxy) Lightly Oxidized, Relieved

DIMENSION:
DIAMETER: 9/16 inch (REF)
THICKNESS (At edge): 0.050 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be a prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

NOTES:
1: The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:24Z
Check the source to verify that this is the current version before use.

2: Epoxy resin (Stoning epoxy) area shall be white as indicated. The color will conform The Institute of Heraldry Color Chip Number 28 or the standard sample.

3: The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2018-158)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:24Z
Check the source to verify that this is the current version before use.