GG-B-636b
FEBRUARY 1, 1960
SUPERSEDING
Fed. Spec. GG-B-636a
June 25, 1953

FEDERAL SPECIFICATION

BRACKET, X-RAY FILM HANGER, RADIOGRAPHIC, STORAGE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers a wall bracket for the storage of radiographic film hangers.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

GG-H-109—Hangers, X-Ray Film Developing and Drying.

QQ-S-766 — Steel, Corrosion-Resisting, Plates, Sheets, Strips, and Structural Shapes.

PPP-B-585—Boxes, Wood, Wirebound.

PPP-B-601—Boxes, Wood, Cleated-Plywood.

PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.

PPP-B-636—Boxes, Fiber.

Federal Standards:

Fed. Test Method Std. No. 151—Metals; Test Methods.

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-B-10377—Box, Wood, Cleated, Veneer, Paper Overlaid.

MIL-L-10547 — Liners, Case, Waterproof.

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 — Marking for Shipment and Storage.

(Copies of Military Specifications and Standards, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

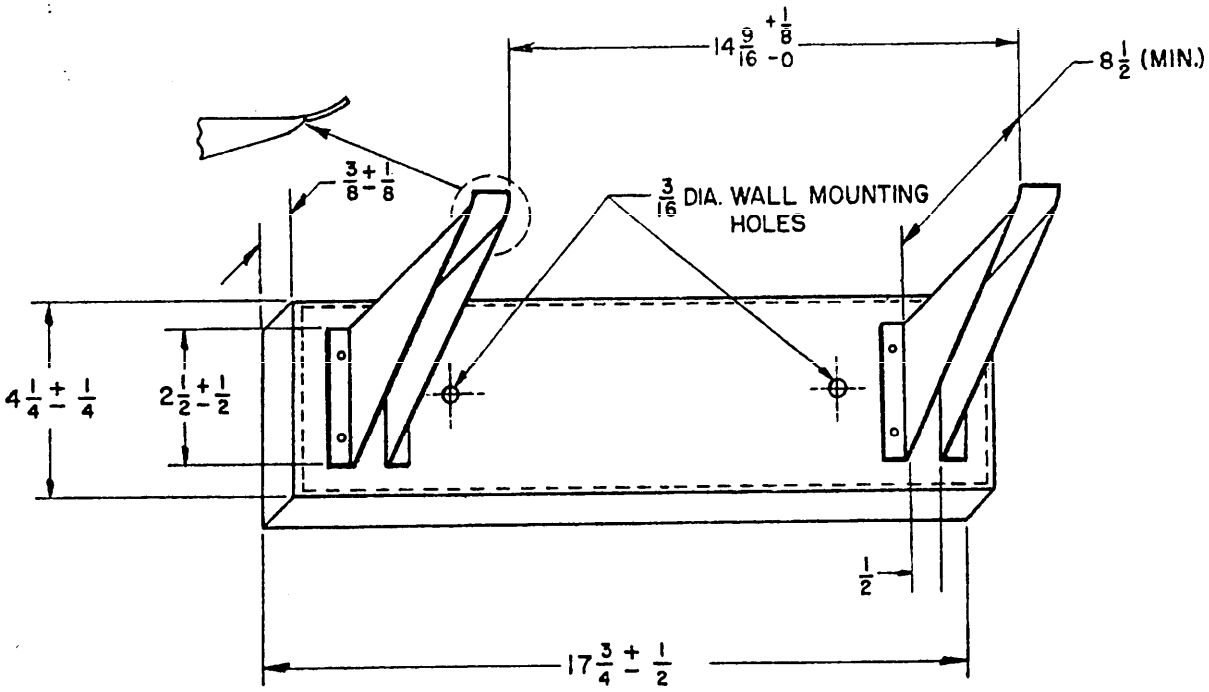


FIGURE 1.—Bracket, radiographic film hanger, storage.

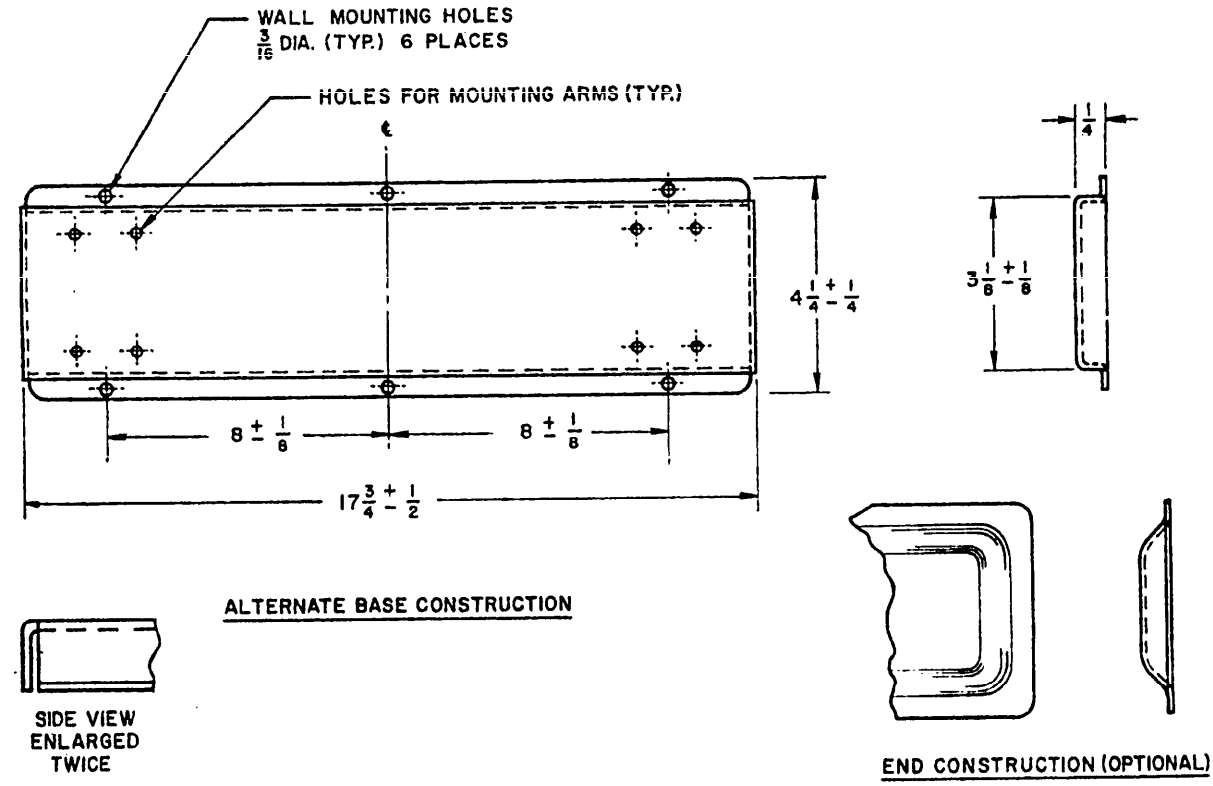


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material.

3.1.1 *Base and arms.*—Base and arms shall be fabricated of corrosion-resisting steel conforming to the requirements of Federal Specification QQ–S–766 for class 430, finish number 1 or 2D.

3.1.2 *Fasteners.* — Screws, nuts, washers, and lockwashers shall be corrosion-resisting steel.

3.2 Design and construction. — Storage bracket shall be as shown in figures 1 and 2, shall be of durable and rugged construction, and shall consist essentially of a metal base, two metal arms, and the fasteners for assembling and mounting. The storage bracket shall accommodate not less than 18 type I hangers conforming to Federal Specification GG–H–109. The bracket shall be furnished disassembled.

3.2.1 *Base.*—The metal base shall be a single sheet of corrosion-resistant steel formed to the shape of a shallow pan, and shall be not less than 0.031 inch (No. 22 United States Standard (U.S.S.) gage) thick. Commercial tolerances shall apply. The base shall have holes $\frac{3}{16}$ inch in diameter for the purpose of mounting the base on the wall. Suitable holes shall be drilled in the base to accommodate the screws used for mounting the metal arms. The holes shall be so placed that the distance between the inside surfaces of the arms is $14\frac{9}{16}$ inches, plus $\frac{1}{8}$ inch, minus 0 inch. Edges and corners shall be so finished that there shall be no rough or sharp surfaces.

3.2.2 *Arms.*—Two corrosion-resistant steel bracket arms not less than $8\frac{1}{2}$ inches in length shall be provided. Each arm shall be provided with a flange designed to mount the arm rigidly on the base with four or more screws. When so mounted, the arms shall be perpendicular to the base and the inside surfaces shall be parallel and $14\frac{9}{16}$ inches (plus $\frac{1}{8}$ inch or minus 0 inch) apart. The steel shall be not less than 0.031 inch (No. 22 U.S.S. gage) thick. Commercial tolerances shall apply. If bracket arms of other designs are used, they shall have the same length and equal, or better, rigidity and strength. The design shall be such as to prevent the hangers from sliding off the end of the arms. This may be accomplished by slightly curving the end of the arm upward by designing the upper surface of the arm to make an angle of approximately 5 degrees to the horizontal, or by other suitable means.

3.2.3 *Passivation.*—The base and arms shall be properly passivated as a final finishing operation.

3.2.4 *Fasteners.* — Each storage bracket shall be supplied with a sufficient number of corrosion-resisting screws for the purpose of mounting the metal arms to the base. The screws shall be of the proper size and type to mount the arms on the base provided. Sheet-metal screws are not acceptable for mounting the arms on a metal base. A corrosion-resisting lockwasher and a corrosion-resisting nut shall be supplied with each screw used to mount the arms on a metal base.

3.2.5 *Resistance to boil test.*—There shall be no visible corrosion on any significant surface of the material subjected to the boil test specified in 4.4.2.

3.3 Identification marking.—Each storage bracket shall be permanently and legibly marked in a conspicuous location with the Federal stock number, manufacturer's name or registered trademark, contract number, and the letters "U.S.". Marking shall be accomplished by stamping, and shall be of a size such as required for ready readability and identification.

3.4 Workmanship.—Workmanship shall be first class throughout. Storage brackets shall be free from defects which detract from their appearance or which may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Supplier responsibilities for inspection. —Unless otherwise specified herein the sup-

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

plier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.1 Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 *Certificates of quality.*—When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 **Sampling.**

4.2.1 *For examination.*—Sampling for examination shall be conducted in accordance with Military Standard MIL–STD–105.

4.2.2 *For tests.*—Sampling for tests shall be conducted in accordance with Military Standard MIL–STD–105.

	Inspection	AQL (percent defective)	Minimum sample size
For visual examination			
Major	II	1.0	---
Total	II	4.0	---
For dimensional examination	L4	2.5	2
For raw material testing	L4	*	(see 4.1.2)
For boil test	L4	*	2

*Acceptance number shall be zero for all sample sizes.

4.2.3 *Raw materials.*—Four ounces of each lot of metal used in the construction of the brackets shall be selected for chemical analysis (see 4.1.2 and 4.4.1).

4.2.4 Where possible, the same sample unit shall be used for the determination of two or more tests.

4.3 **Examination.** — The bracket shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 *Classification of defects.*—Examination shall be conducted in accordance with the following classifications of defects:

*Categories and defects***

Major

101. Bracket not free of cracks, burs, and sharp edges.
102. Bracket not complete with all component parts.
103. Bracket fails to assemble and align properly.
104. Bracket arm construction such that hangers slide off end.

Minor

201. Marking of unit container not present or permanent and complete.
202. Bracket not free of scratches, bulges, or indented areas.

** Inspection is not restricted to the classified possible defects listed above.

4.3.2 *Dimensional examination.* — The bracket shall be inspected for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 **Tests.**—Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 *Chemical analysis.*—Tests for chemical analysis shall be conducted in accordance with method 111 or 112 of Fed. Test Method Std. No. 151.

4.4.2 *Boil test.*—Before testing, material shall be scrubbed with soap and water, and dried. After cleaning, the material shall be boiled in distilled water in a suitable glass container for 30 minutes and permitted to remain submerged, in the water and container in which boiled, for 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:52Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

(For civil agency procurement Federal Standard No. 102 shall be referred to for definitions and applications of the various levels of packaging and packing protection for supplies and equipment.)

5.1 Packaging.

5.1.1 *Unit of issue.*—One bracket, as specified, constitutes one unit.

5.1.2 *Packaging quantities.*—The number of units of issue indicated in table I shall be packaged in each unit and exterior container, as applicable, for the required level of protection specified in procurement document.

TABLE I.—*Packaging quantities*

Unit package	Intermediate package	Exterior container
1 unit	Not required	48 units

5.1.2.1 *Packing variation permitted.* — If the number of units required to be shipped results in final exterior container of less than the 48 units, such exterior container shall be of suitable size and conform to the requirements of the applicable level of packing specified.

5.1.3 *Level A.*

5.1.3.1 *Unit package.*—Each unit shall be disassembled as far as is practicable. Component parts of each unit shall be protected by wrapping in kraft paper of suitable weight. Screws shall be placed in a cloth bag. Each complete unit shall be packaged in a carton of appropriate size and design conforming to the requirements of Federal Specification PPP–B–636. Carton shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to, the contents. Each carton shall be adequately secured to prevent accidental opening.

5.1.4 *Level C.*—Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.*—Material packaged as specified in 5.1.3 shall be packed in snug-fitting boxes conforming to Federal Specification PPP–B–585 (style 1, class 3 for type 2 load), PPP–B–601 (overseas type, style B, using type III, class 1 plywood), PPP–B–621 (class 2, style 4 for type 2 load), or Military Specification MIL–B–10377 (overseas type, style B). Boxes shall have case liners conforming to Military Specification MIL–L–10547 (type I, grade B, class 2) closed and sealed in accordance with the appendix thereto. Boxes shall be closed and strapped in accordance with the appendix to the applicable specification.

5.2.2 *Level B.*—Material packaged as specified in 5.1 shall be packed in snug-fitting boxes conforming to Federal Specification PPP–B–601 (domestic type, style B, using type III, class 1 plywood), PPP–B–585 (style 2, class 1 for type 2 load), PPP–B–621 (class 1, style 4 for type 2 load), or Military Specification MIL–B–10377 (domestic type, style B), closed in accordance with the appendix to the applicable specification.

5.2.3 *Level C.* — The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking (Civil Agencies).

5.3.1 *Exterior container.* — Unless otherwise specified in the contract or order, exterior containers shall be marked in accordance with Federal Standard No. 123.

5.4 Marking (Military Agencies).

5.4.1 *Unit package.* — Each unit package shall be marked in accordance with section 5 of Military Standard MIL–STD–129.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

5.4.2 *Exterior container.* — Exterior container shall be marked in accordance with Military Standard MIL–STD–129, except that 6.2(c), 6.2(d), 6.5, and 7.5.1 shall not be applicable. Service color and service symbol markings are required only on direct shipments from the contractor's plant to overseas activities.

6. NOTES

6.1 Ordering data. — Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

6.3 Transportation description.—Transportation description and minimum weight applicable to this commodity are:

Rail: Brackets, shelf, metal
Carload minimum weight 30,000 pounds.

Motor: Brackets, shelf, metal
Motor volume minimum weight 30,000 pounds.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS:
Army—Army Medical Service
Navy—Bureau of Medicine and Surgery
Air Force.

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.