GG-S-00627b(DSA-DM)
22 September 1965
Interim Revision of
Federal Specification
GG-S-627a
25 September 1956

INTERIM FEDERAL SPECIFICATION

SPLINT SET, ARCH WIRE, DENTAL

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pennsylvania 19101, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized the use of this interim Federal specification as a valid exception to Federal Specification GG S-627a, dated 25 September 1956.

1. SCOPE

1.1 This specification covers arch wire splint sets suitable for the fixation of fracture of the jaw.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

QQ-C-585	Copper-Nickel-Zinc-Alloy Plate, Sheet, Strip and Rolled Bar.
ZZ-B-117	Band, Ligature, Dental, Rubber.
CCC-T-191	Textile Test Methods.
PPP-B-566	Boxes, Folding, Paperboard.
PPP B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP B-676	Box, Setup.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Office in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Splints. The splints shall be made of Copper Alloy Composition 752, dead-soft annealed temper, conforming to QQ-C-585, and shall be plated with rhodium.

3.1.2 Ligature Wire. The ligature wire shall be gold- or rhodium-plated brass.

3.1.3 Dental Floss. The dental floss shall be composed of waxed nylon continuous filaments.

3.1.4 Rubber bands. The rubber bands shall be made from live Para rubber or pale crepe rubber.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

3.2 Style, design and dimensions. The splint set shall be of the Winter design. The set shall consist of 2 splints, 10 ligature wires with dental floss, and 24 rubber bands.

3.2.1 Splints. The splints shall consist of a base arch wire to which attachment pins shall be soldered. Each pin shall have a body and a round head. There shall be not less than 5 pins for each 1-inch length of base wire. The splints shall conform to Figure 1 in style, design and dimensions.

3.2.2 Ligature wire and dental floss: The ligature wire shall be 0.018 ± 0.001 inch in diameter and 8.5 ± 0.5 inches long. It shall be bent over itself in the center, and shall have a 9- inch piece of dental floss inserted at the band. The dental floss shall be at least 960 denier with a tensile strength of at least 13.0 pounds. The nylon dental floss shall be tested in accordance with method No. 4100 of CCC-T-191.

3.2.3 Rubber bands. The bands shall conform to ZZ-B-117 for size 2.

3.3 Workmanship. The splint sets shall be free from defects which detract from their appearance or may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to insure that supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties).

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the component or material, which list the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 Sampling for examination shall be conducted in accordance with MIL-STD-105. Sampling for component testing shall be in accordance with referenced subsidiary specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the currentversion before use.

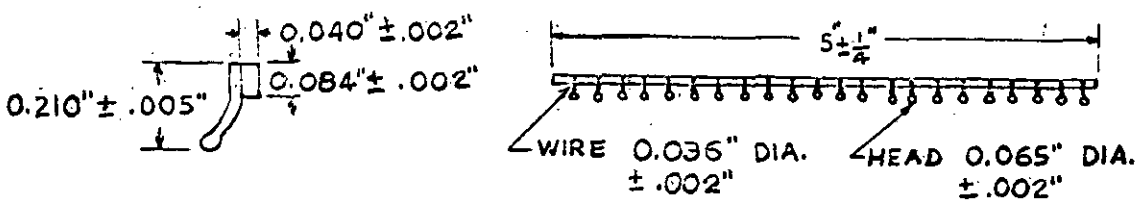


Figure 1. Winter Design Splint

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

4.3 Examination. The splint set shall be examined to determine compliance with specification requirements.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. Two splints, as specified, constitute one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table I. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	6 units	144 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Unit package shall be a carton of appropriate size constructed in accordance with Federal Specification PPP-B-566 or PPP-B-676, except that commercial colors shall be acceptable. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.3.2 Intermediate package. Intermediate package shall be a carton of appropriate size constructed in accordance with Federal Specification PPP-B-566 or PPP-B-676, except that commercial colors shall be acceptable, or PPP-B-636. Closure shall be adequate to prevent spillage of contents under normal handling.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:52Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP B-585, style 3, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; PPP-B-621, Table III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix, and waterproofing shall conform with 30.4, of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, Table I, using type III, class 1 plywood; or shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 2 use; PPP-B-621, Table I; or PPP-B-636, type CF, class domestic and method I closure shall be utilized.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:52Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES.

6.1 Ordering data. Procurement documents shall specify the following:

a. Number and date of this specification
b. Type required (See Section 3)
c. Selection of applicable levels of packing (See 5.2).

6.2 This specification does not include all the types of the commodity indicated by the title of this specification or those which are commercially available, but is intended to cover the types which are normally procured to meet Federal Government requirements.

Custodian
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD UNDER

POSTAGE FEES PAID
DEFENSE SUPPLY AGENCY

DEFENSE SUPPLY AGENCY
DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20th ST
PHILADELPHIA, PA. 19101

OFFICIAL BUSINESS

DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER

ATTN: DIRECTORATE MEDICAL MATERIEL

2800 SOUTH 20TH STREET

PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE
CONTRACT NO.	QUANTITY OF ITEMS PROCURED
DOLLAR AMOUNT $	

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-82T9

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.