GG-S-636b
JULY 2, 1957
SUPERSEDING
Int. Fed. Spec. GG–S–00636a (GSA–FSS)
March 1, 1956, and
Fed. Spec. GG–S–636
May 8, 1945

FEDERAL SPECIFICATION

SPLINT, WIRE, LADDER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers a wire ladder splint for medical and surgical uses.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids form a part of this specification:

Federal Specifications:

PPP–B–585—Boxes; Wood, Wirebound.
PPP–B–601 — Boxes, Wood, Cleated-Plywood.
PPP–B–621—Boxes, Wood, Nailed and Lock-Corner.
PPP–B–636—Boxes, Fiber.
PPP–B–676 — Boxes, Set-Up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL–B–10377 — Box, Wood, Cleated, Veneer, Paper Overlaid.
MIL–L–10547 — Liners, Case, Waterproof.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by the contractor in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Material.**—The material shall be malleable iron wire or dead soft annealed steel wire.

3.2 **Description.**—The splint shall consist of a wire frame and wire crosspiece secured thereto as shown in figures 1 and 2. The finished splint shall be strong but ductile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

3.3 Construction.

3.3.1 *Frame.*—The frame shall be one continuous length of wire, approximately 66 inches long, having a diameter of 0.1205 plus or minus 0.002 inch, and bent in the form of an open three-sided rectangle, 3½ inches wide by 31 inches long, with one of the short sides open.

3.3.2 *Crosspiece.*—The crosspiece shall be single strips of wire, having a diameter of

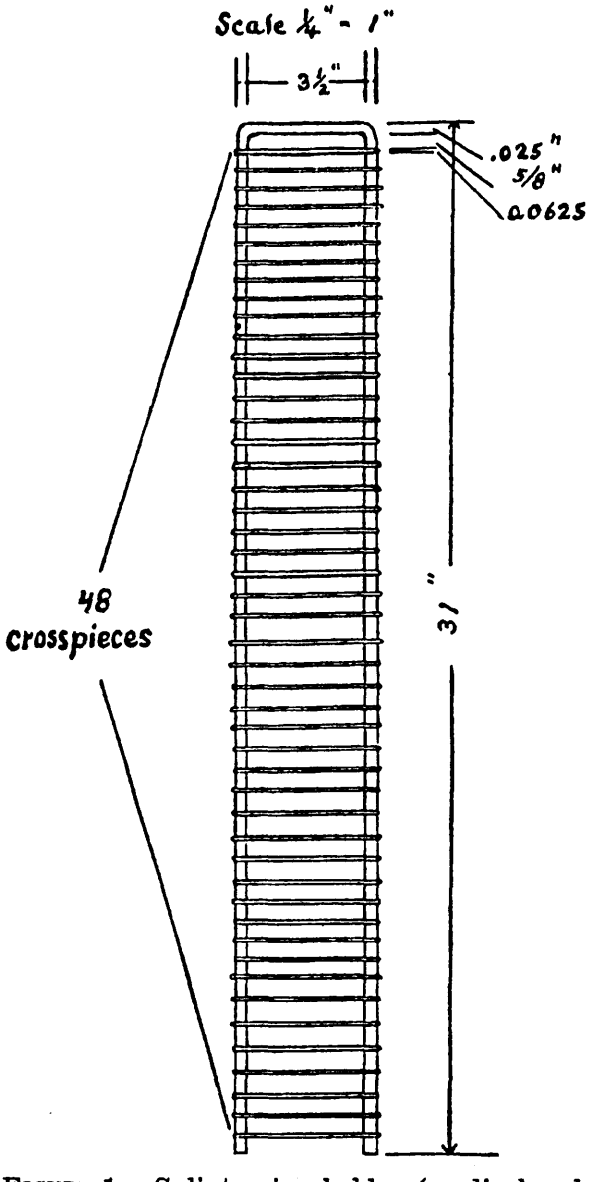


FIGURE 1.—Splint, wire, ladder (medical and surgical use).

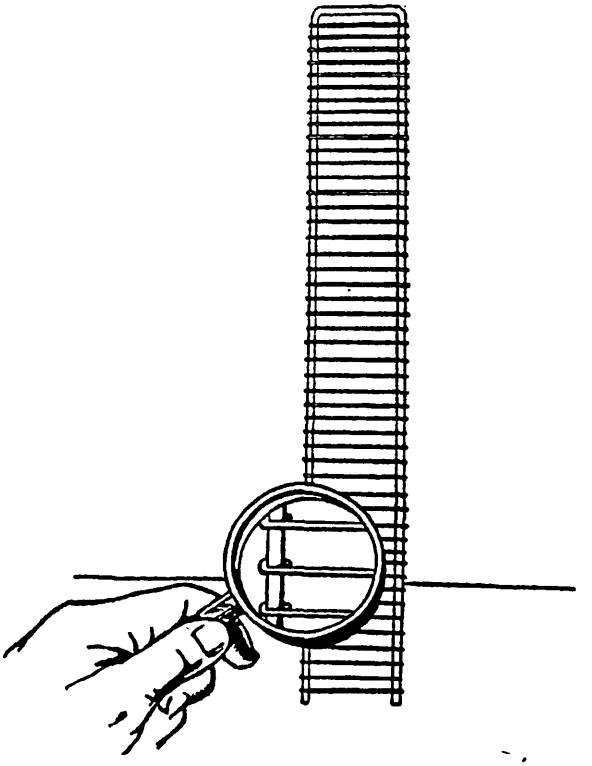


FIGURE 2.—Splint, wire, ladder (medical and surgical use).

0.0625 inch, plus or minus 0.001 inch, placed parallel at right angles to the length of the frame approximately ⅝-inch apart, plus or minus 1/16 inch.

3.4 **Assembly.** — Both ends of the crosspieces shall be tightly looped around the frame, with loops completely closed, and then shall be electrically spotwelded into place.

3.5 **Finish.**—After completion, the splint shall be heavily hot tin coated.

3.6 **Workmanship.**—Workmanship shall be first class throughout. Splint shall be free from defects which detract from its appearance or may affect its serviceability.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 **Sampling.**—Unless otherwise specified, samples shall be submitted in accordance with instructions furnished by the procuring activity (see 6.2). In addition, sampling pro-

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:52Z
Check the source to verify that this is the current version before use.

cedure shall be conducted in accordance with the procedures set forth in Military Standard MIL–STD–105.

4.2 **Inspection.**—Inspection may be made throughout the entire process of manufacture. The passing as satisfactory of any detail of construction or materials shall not relieve the contractor of responsibility for faulty workmanship or materials which may be discovered at any time prior to final acceptance. Final inspection of the finished article shall be made either at point of production or at point of delivery as specified (see 6.2). In case of factory inspection, every facility shall be afforded inspectors, by the manufacturer, for the prosecution of their work.

4.3 **Tests.** — Tests shall be conducted as necessary to determine material and design requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Unit of issue.*—One splint, as specified, constitutes one unit.

5.1.2 *Packaging quantities.*—The number of units of issue indicated in table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in procurement document.

5.1.2.1 *Packing variation permitted.* — If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container

TABLE I.—*Packaging quantities*

Federal Stock Number	Unit package	Intermediate package	Shipping container
		Units	*Units*
6515–373–2100	Not required	12	144

of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Intermediate package.* — Intermediate package shall be a carton of appropriate size constructed in accordance with Federal Specification PPP–B–636 or PPP–B–676. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.4 *Level C.*—Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.*

5.2.1.1 *Exterior container.*—Exterior container shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 3 use; PPP–B–601, table II, using type III, class 1 plywood; PPP–B–621, table III; or Military Specification MIL–B–10377, table II.

5.2.1.2 *Case liner.* — Each box shall be lined with a waterproof case liner conforming to Military Specification MIL–L–10547. Closure and sealing shall conform to applicable paragraph of appendix thereto.

5.2.1.3 *Strapping.* — Strapping, when required, shall be in accordance with applicable box specification.

Note.—Strapping will not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 *Level B.*

5.2.2.1 *Exterior container.*—Exterior container shall conform to Federal Specification PPP–B–601, table I, using table III, class 1 plywood, or shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

use; PPP–B–621, table I; or Military Specification MIL–B–10377, table I.

5.2.3 *Level C.* — The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1. *Interior packages.* — Each intermediate package shall be marked in accordance with section 5 of Military Standard MIL–STD–129.

5.3.2 *Shipping container.*—Shipping container shall be marked in accordance with Military Standard MIL–STD–129. Service color marking and symbol are not required on containers for level A packs when addressed to domestic establishments.

6. NOTES

6.1 Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.

6.2 Ordering data. — Purchasers should specify size required and should exercise any desired options offered herein. See 4.1, 4.2, 5.1 and 5.2).

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.4 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the type, etc., normally procured to meet Federal Government requirements.

6.5 Transportation description.—Transportation description applicable to this item is:

Wire goods, not otherwise indexed by name.

Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Truckload minimum weight 20,000 pounds.

6.6 This specification covers the following item appearing in the Armed Services Medical Stock List:

6515–373–2100 SPLINT, WIRE, LADDER, 3½ by 31 inches.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—M
Navy—Md
Air Force—AF.

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.