
MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 130 REMOVABLE CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28731.

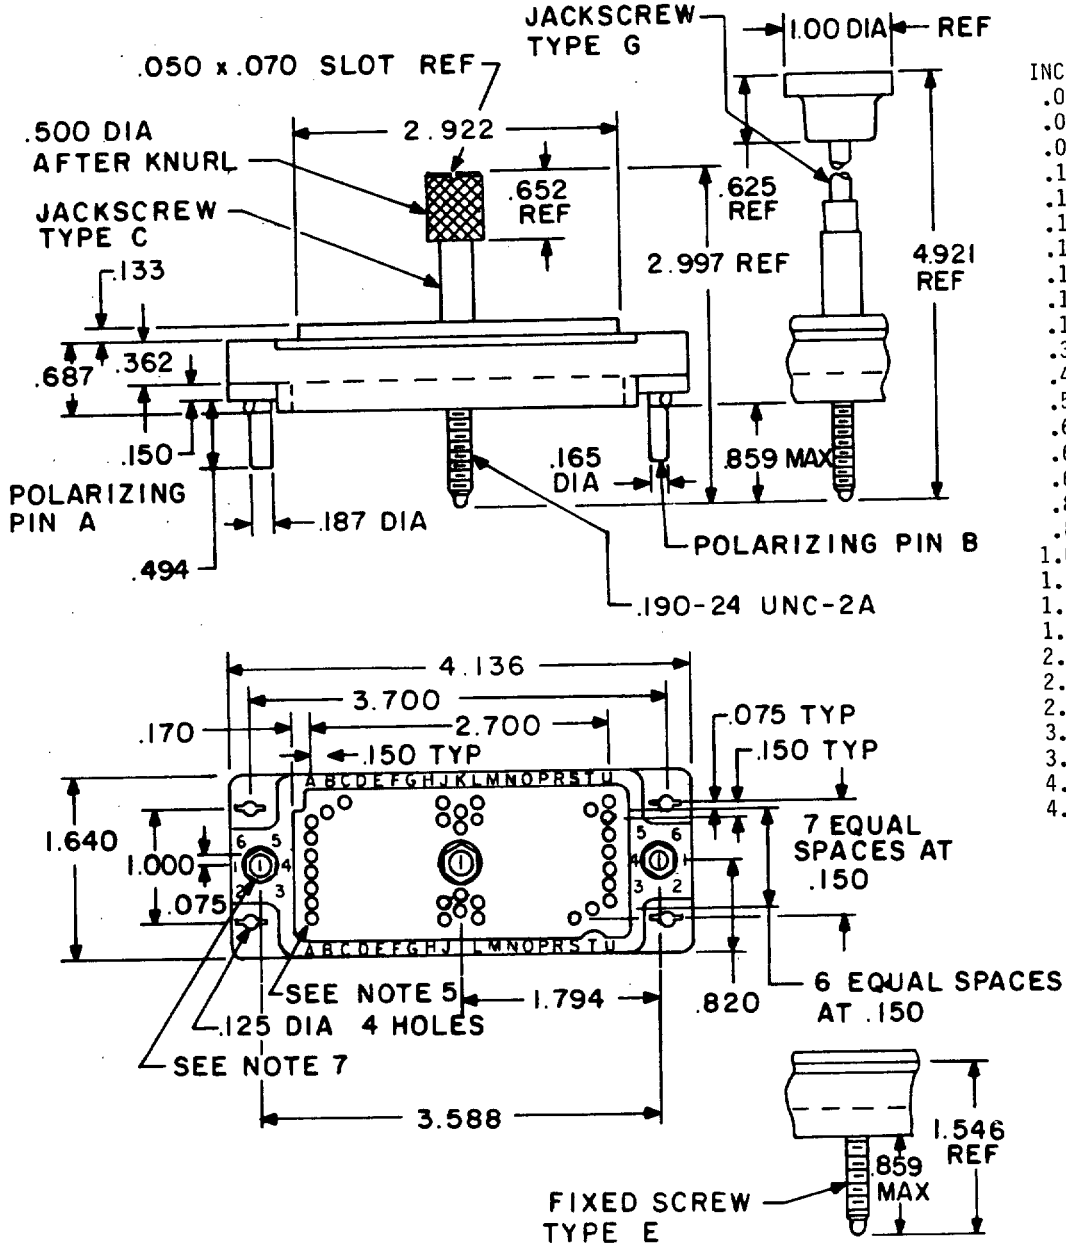


INCHES	MM
.050	1.27
.070	1.78
.075	1.91
.125	3.18
.133	3.38
.150	3.81
.165	4.19
.170	4.32
.187	4.75
.190	4.83
.362	9.19
.494	12.55
.500	12.70
.625	15.88
.652	16.56
.687	17.45
.820	20.83
.859	21.82
1.000	25.40
1.546	39.27
1.640	41.66
1.795	45.57
2.700	68.58
2.922	74.22
2.997	76.12
3.588	91.14
3.700	93.98
4.136	105.05
4.921	125.00

FIGURE 1. Connector, male rectangular.

(E) denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

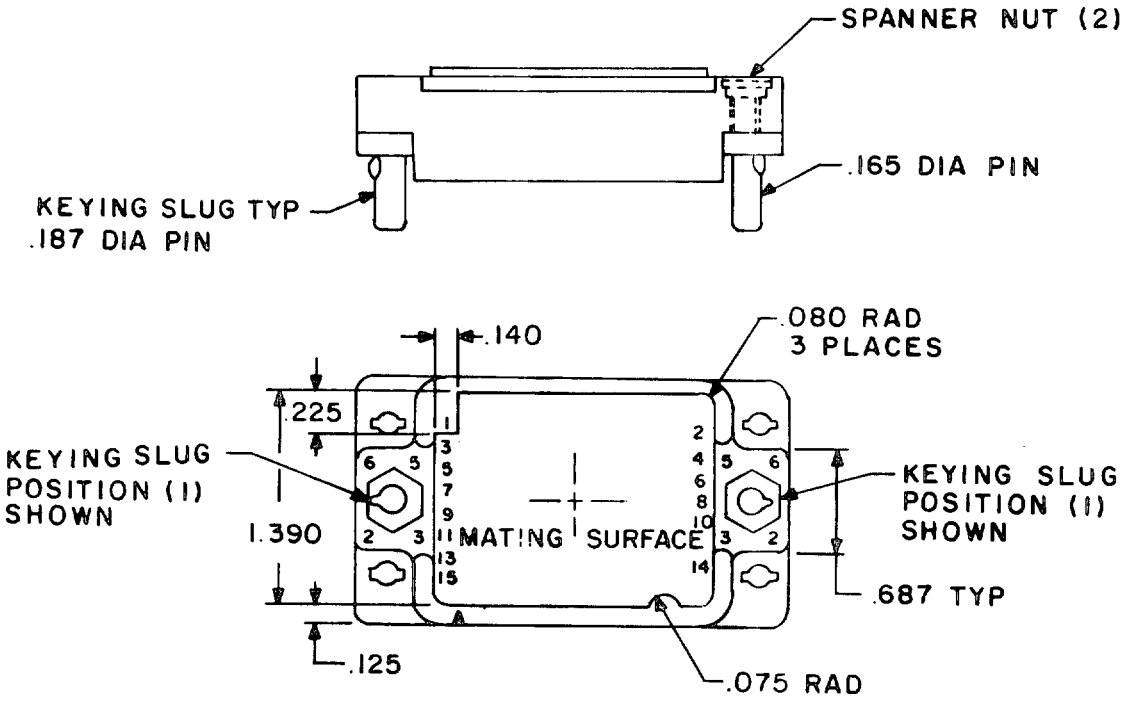

POLARIZING POSITION CHANGE

Keying position on both polarizing pins can be rotated to desired position by loosening spanner nut (counter-clockwise), resetting pin in one of six positions then retightening spanner nut (clockwise).

NOTE: Overtightening of spanner nut can fracture connector. Spanner keying wrench shown below.

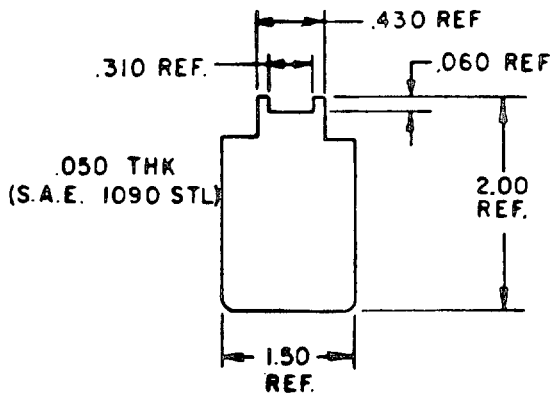


INCHES	MM
.050	1.27
.060	1.52
.075	1.90
.080	2.03
.125	3.17
.140	3.56
.225	5.71
.310	7.87
.430	10.92
.687	17.45
1.390	35.31
1.500	38.10
2.000	50.80

SPANNER WRENCH

Configuration A - Connector polarization guide (layout)

FIGURE 1. Connector, male rectangular - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

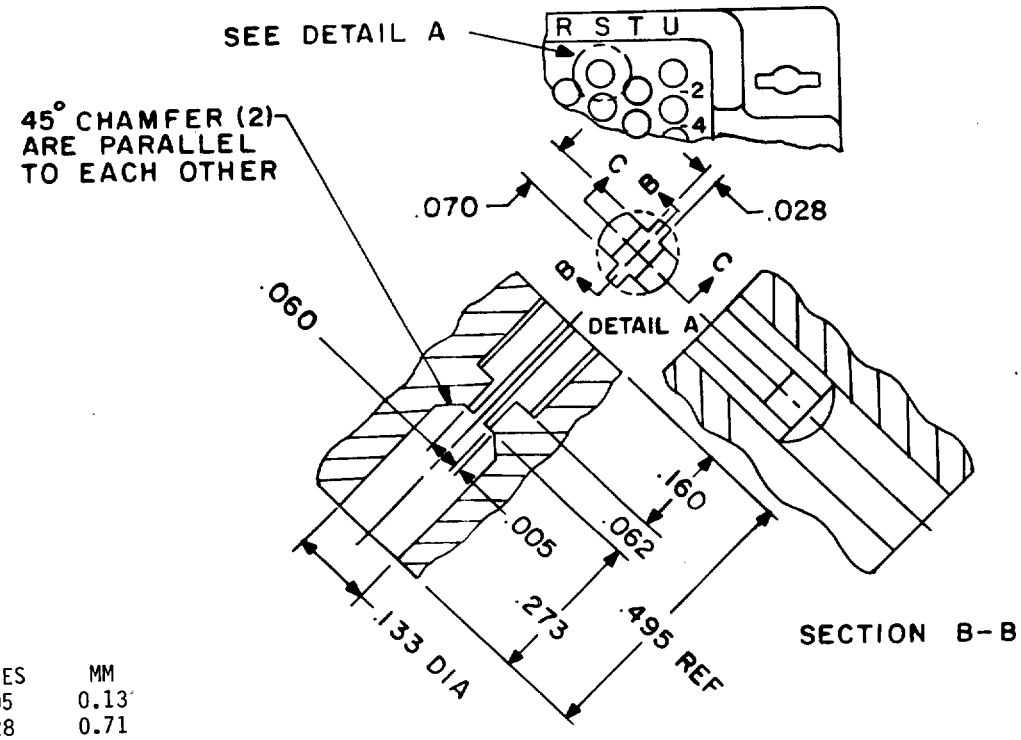

INCHES	MM
.005	0.13
.028	0.71
.060	1.52
.062	1.57
.070	1.78
.133	3.38
.160	4.06
.273	6.93
.495	12.57

Configuration B - Contact hole detail

FIGURE 1. Connector, male rectangular - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerances between any two contact centers shall be ±.004 (0.10 mm).
4. Flatness, squareness, and parallelism shall be within dimensional tolerances.
5. Contact hole details shall be in accordance with configuration B.
6. Mating connector information:
   M28731/1-0109, -0110, -0112 and -0113 mate with M28731/6-0075 and -0077.
   M28731/5-0111, -0114 and -0115 mate with M28731/6-0074 and 0076.
7. Polarization information:
   Polarization pins are provided for indexing to preclude intermixing of adjacent connectors. By using a standard type spanner wrench, polarization pins can be rotated to desired position. For parts supplied directly to the government, polarization will be in the 1-1 position. For other polarization positions see connector polarization guide configuration A (see marking, note 13d). For direct government acquisition a tool is supplied in the unit package for polarization socket adjustment.
8. Contact and terminal designations:
   Contacts and terminals shall be designated on the insulator using letters in the location shown on figure 1.
9. Tolerance shall be ±.010 (0.25 mm) unless otherwise specified.
10. Patent notice:
    Patent No. 3,248,686 owned by Elco Corporation. The government has a royalty-free license under the above patent for the benefit of manufacturers of items called for in this specification, either for the government or for use in equipment to be delivered to the government.
11. For direct government acquisition crimp contacts M28731/20-0001 are furnished in a plastic bag in each unit package (see marking, note 13a).
12. For direct government acquisition solder hole and wrappost contacts M28731/25-0001 and 26-0001 are factory installed in connector body (see marking, note 13a).
13. Marking:
    a. Connectors supplied directly to the government shall be marked with the military part number (see table I). Example: M28731/5-0110.
    b. Connectors supplied with contacts to government end users shall be marked with the military part number (see table I). Example: M28731/5-0110.
    c. (E) Connectors supplied without contacts to government end users shall be marked as follows: Example: M28731/5G (screw type from table I). The user shall complete the remaining portion of the military part number as shown in table I based upon contact type he assembles. Example: M28731/5G-0110.
    (E) d. Polarization position marking is not required unless otherwise specified. When required polarization marking shall be in accordance with the connector polarization guide (see configuration A). The marking shall appear following the part number.
14. Applicable contact insertion and removal tools:

    Insertion MIL-I-81969/13-01
    Removal MIL-I-81969/11-01

15. When double wire crimp contact MIL-C-28731/23 is required for use with the connector, it shall be ordered separately.
16. Rectangular shields shall conform to MIL-C-28731/7-0005 or -0006 and must be ordered separately.

FIGURE 1. Connector, male rectangular - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating and unmating forces (torque): 150 inch-ounces, maximum.

Mechanical shock (specified pulse): Applicable.

Part number: See table I.

TABLE I. Part number information.

Military part number	Actuating hardware	Polarizing pin position A .187 Dia.	Polarizing pin position B .165 Dia.	Contact type
M28731/5-0109	Jackscrew Type C	1	1	Crimp MIL-C-28731/20 1/
M28731/5-0110	Jackscrew Type G	1	1	Crimp MIL-C-28731/20 1/
M28731/5-0111	Fixed screw Type E	1	1	Crimp MIL-C-28731/20 1/
M28731/5-0112	Jackscrew Type C	1	1	Solder hole MIL-C-28731/25 2/
M28731/5-0113	Jackscrew Type G	1	1	Solder hole MIL-C-28731/25 2/
M28731/5-0114	Fixed screw Type E	1	1	Solder hole MIL-C-28731/25 2/
M28731/5-0115	Fixed screw Type E	1	1	Wrappost MIL-C-28731/26 2/

1/ See figure 1, note 11
2/ See figure 1, note 12

NOTE:
M28731/5-0109 supersedes M28731/5-0001 thru M28731/5-0036.
M28731/5-0110 supersedes M28731/5-0037 thru M28731/5-0072.
M28731/5-0111 supersedes M28731/5-0073 thru M28731/5-0108.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3488-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28731/5E	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:54Z
Check the source to verify that this is the current version before use.