
MILITARY SPECIFICATION SHEET

DIAL, CONTROL, MULTITURN COUNTERS

100-TURN COUNTERS, 4-DIGIT

The complete requirements for procuring the dials described herein shall consist of this document and the latest issue of Specification MIL-D-28728.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

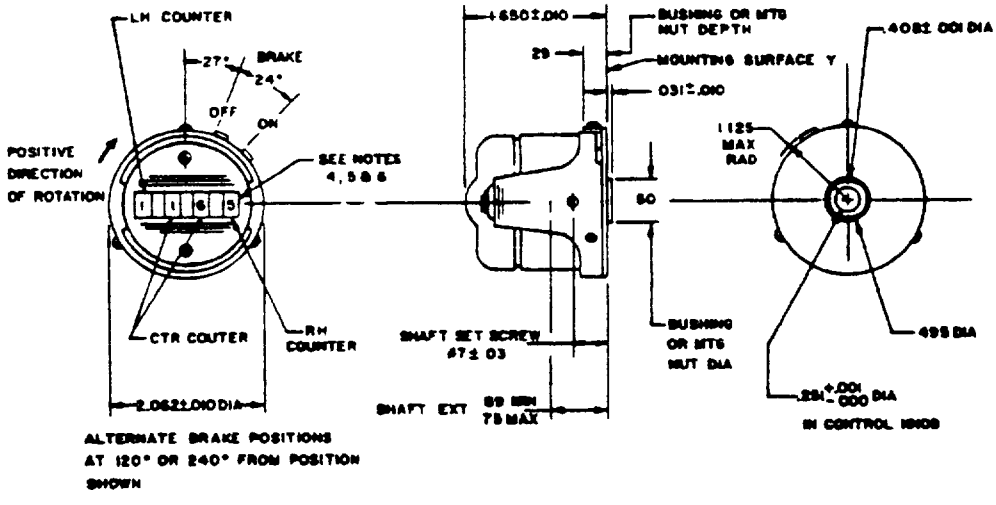

INCHES	MM	INCHES	MM
.001	.03	495	12.57
.010	.25	.50	12 70
.03	.76	.69	17.53
.031	.79	.75	19.05
.251	6.38	1.125	28.58
.29	7.37	1.650	41 91
.408	10.36	2.062	52.37
.47	1.19		

NOTES
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.02 (.51 mm) for two place decimals and ±5° for angles
4. Application data For use with tuning or selecting mechanism having 3/8 - 32NEF-2A bushing.
5. Numerals and graduation are indented and black filled.
6. Scale details shall be as shown.

FSC 5355

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Form and dimensions See figure

Numeral size .188 inch high

Rotation Continuous clockwise or counterclockwise, clockwise for increase in count

Number of turns 100

Materials
- Housing zinc die cast
- Housing finish chromate sealed and painted
- Window (lens) clear cellulose propionate
- Control knob knurled anodized aluminum
- Mounting plate zinc die cast

Colors
- Lusterless black No 37038
- Lusterless gray No 36231
- Lusterless white No 37875

} per FED-STD-595

Weight 4 25 ounces maximum

Method of count In line digital readout (four digit display) 0000 to 9999 in 100 turns of control knob, one turn of knob displays readout of 100 in increments of tenths

Operating temperature range 55° C to +85° C

Locking brake torque 25 inch-ounces minimum

Readout accuracy .001 percent of full count

Part number Consists of the basic number of this specification sheet and a dash number taken from table I

TABLE I *Colors and* part numbers

Part No. M28728/7-	Colors				
	Numerals			Mounting plate and cover	Knob
	LH counter	Center counter	RH counter		
001	White numerals on black	White numerals on black	Black numerals on white	Lusterless gray	Clear anodized
002	White numerals on black	White numerals on black	Black numerals on white	Lusterless black	Lusterless black

Custodians
Army EL
Navy EC
Air Force 11

Review activities
Army MI
Navy OS
Air Force 11, 82
DSA ES

User activities
Army MU, ME
Navy SH, AS, MC
Air Force 17

Preparing activity
Navy EC

Agent
DSA - ES

(Project 5355-0088)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:52Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity *(as indicated on reverse hereof)*

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863 WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:52Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:52Z
Check the source to verify that this is the current version before use.

NOTICE OF GROUP VALIDATION

INCH-POUND

MIL-D-28728B
NOTICE 1
25 February 1991

MILITARY SPECIFICATION

DIAL, CONTROL, MULTI-TURN COUNTERS
GENERAL SPECIFICATION FOR

The following military specification sheets of MIL-D-28728B have been reviewed and are determined to be valid for use in acquisition as listed below:

Document	Date
MIL-D-28728/2B	03 September 1986
/3A	06 December 1971
/7	15 May 1970

Preparing activity:
Navy - EC

Agent:
DLA-GS

AMSC N/A

FSC 5355

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:52Z
Check the source to verify that this is the current version before use.