
FED. SUP CLASS
5340

MS 122236 THRU MS 122275

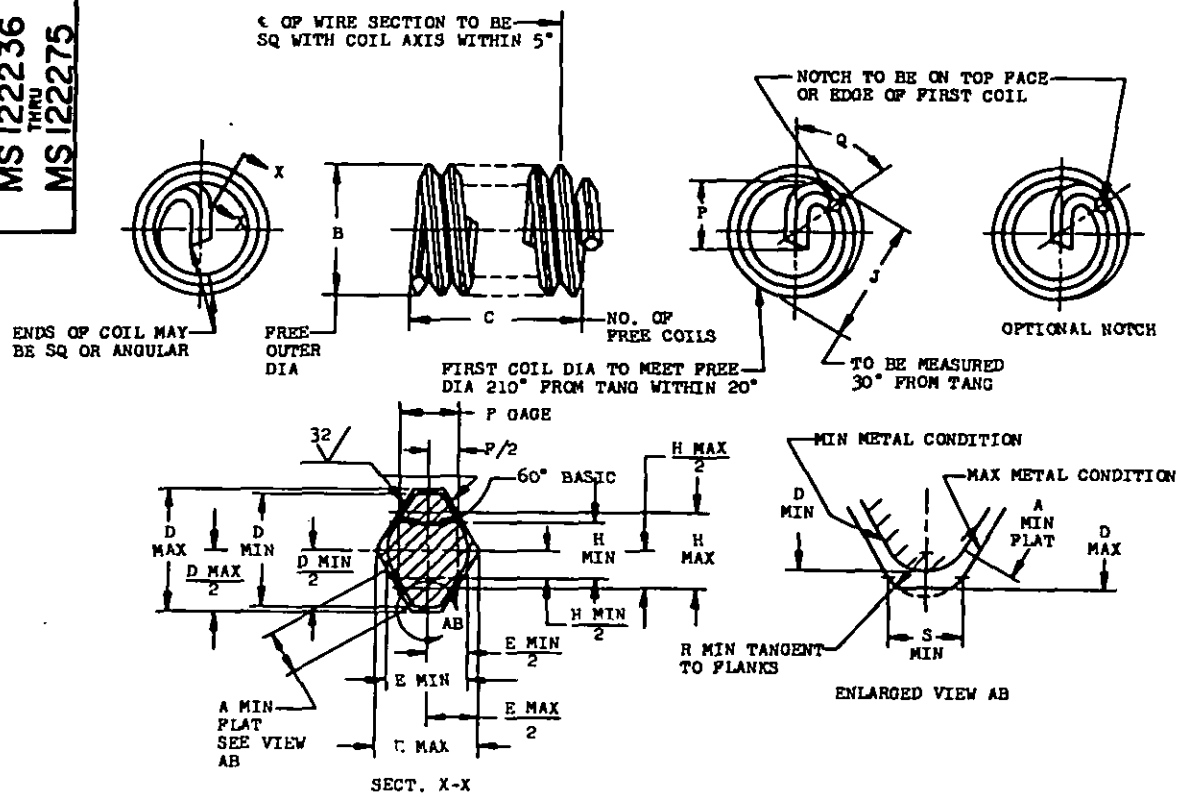

(D)

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* ±.250 COIL	D MIN	D MAX	E MIN	E MAX	P GAGE	H MIN	H MAX
.086 -56	.258	.0027	.110	.119	11.875	.0163	.0193	.0126	.0156	.00893	.0112	.0116
.099 -48	.297	.0043	.128	.139	11.500	.0196	.0226	.0152	.0182	.01042	.01313	.01353
.112 -40	.336	.0068	.144	.159	10.875	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.125 -40	.375	.0068	.158	.173	12.250	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.138 -32	.414	.0076	.178	.193	10.875	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.164 -32	.492	.0076	.205	.220	13.250	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.190 -24	.570	.0120	.244	.259	11.375	.0413	.0449	.0335	.0365	.02083	.02656	.02706
.250 -20	.750	.0164	.310	.330	12.750	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.3125-18	.938	.0176	.380	.400	14.625	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.375 -16	1.125	.0215	.452	.472	15.750	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.4375-14	1.312	.0267	.526	.551	16.125	.0730	.0770	.0545	.0625	.03571	.04589	.04639
.500 -13	1.500	.0273	.597	.622	17.125	.0758	.0829	.0593	.0673	.03846	.04946	.04996
.5625-12	1.688	.0334	.669	.694	17.875	.0861	.0900	.0649	.0729	.04167	.05363	.05413
.625 -11	1.875	.0351	.742	.767	18.375	.0909	.0980	.0715	.0795	.04545	.05855	.05905
.750 -10	2.250	.0402	.881	.906	20.125	.1007	.1079	.0795	.0875	.05000	.06445	.06495
.875 -9	2.625	.0466	1.022	1.052	21.250	.1124	.1199	.0892	.0972	.05556	.07167	.07217
1.000 -8	3.000	.0544	1.166	1.196	21.625	.1264	.1350	.1004	.1094	.06250	.08069	.08119
1.125 -7	3.375	.0645	1.315	1.355	21.250	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.250 -7	3.750	.0645	1.443	1.483	23.750	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.375 -6	4.125	.0775	1.598	1.643	22.250	.1695	.1799	.1368	.1458	.08333	.10775	.10825
1.500 -6	4.500	.0775	1.727	1.772	24.500	.1695	.1799	.1368	.1458	.08333	.10775	.10825

(D) FOR CHANGES SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11 Other Cust Army - AV Navy - AS	TITLE INSERT, CRES HELICAL COIL COARSE THREAD, 3 DIA NOMINAL LENGTH	MILITARY STANDARD MS 122236 THRU 122275	
PROCUREMENT SPECIFICATION MIL-I-8846	SUPERSEDES: MS21208 IN PART	SHEET 1 OF 2	

Project No. 5340-2003

APPROVED 29 May 53 — REVISED (A) 26 May 59 (B) 24 Oct 66 (C) 15 Oct 69 (D) 24 Feb 76

User: Army - EL, ME, MI, MU; Navy - MC, OS; Air Force -

Review activi/ fmy - WC; Avy -; Air Force - 82

This standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.

MS 122236 THRU MS 122275

User: Army - EL, ME, MI, MU
Navy - WC, OS
Air Force -

Review activities: Army - WC
Navy -
Air Force - 82

THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED[a]
.086 -56	.103	.111	.062	.080	75°-150°	.0032	.0056	.0183	MS122255	
.099 -48	.120	.131	.070	.090	75°-150°	.0038	.0065	.0271	MS122275	
.112 -40			.070	.095	25°-100°	.0045	.0078	.0423	MS122236	MS122256
.125 -40			.078	.108	25°-100°	.0045	.0078	.0536	MS122237	MS122257
.138 -32			.091	.121	25°-100°	.0056	.0098	.0807	MS122238	MS122258
.164 -32			.118	.153	20°-100°	.0056	.0098	.125	MS122239	MS122259
.190 -24			.141	.176	15°- 90°	.0075	.0130	.219	MS122240	MS122260
.250 -20			.182	.233	20°- 80°	.0090	.0156	.490	MS122241	MS122261
.3125-18	.375	.390	.214	.286	20°- 80°	.0100	.0174	.806	MS122242	MS122262
.375 -16	.445	.462	.269	.348	20°- 80°	.0113	.0195	1.316	MS122243	MS122263
.4375-14	.518	.536	.313	.411	20°- 80°	.0129	.0223	2.000	MS122244	MS122264
.500 -13	.586	.606	.348	.458	20°- 80°	.0139	.0240	2.857	MS122245	MS122265
.5625-12	.656	.676	.390	.520	20°- 80°	.0150	.0260	4.000	MS122246	MS122266
.625 -11	.727	.747	.421	.567	20°- 80°	.0164	.0284	5.263	MS122247	MS122267
.750 -10	.840	.885	.453	.640	60°-120°	.0180	.0312	8.333	MS122248	MS122268
.875 -9	.991	1.026	.500	.734	60°-120°	.0200	.0347	12.500	MS122249	MS122269
1.000 -8	1.135	1.170	.526	.781	60°-120°	.0226	.0391	16.670	MS122250	MS122270
1.125 -7	1.260	1.315	.557	.843	60°-120°	.0258	.0446	26.536	MS122251	MS122271
1.250 -7	1.366	1.416	.679	.937	60°-120°	.0258	.0446	32.819	MS122252	MS122272
1.375 -6	1.545	1.598	.689	1.093	60°-120°	.0301	.0521	45.839	MS122253	MS122273
1.500 -6	1.676	1.727	.811	1.187	60°-120°	.0301	.0521	54.972	MS122254	MS122274

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
* 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG).
5. SURFACE TEXTURE: ANSI B46.1-1962.
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLES AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.
(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE THE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.

D POR CHANGES SEE SHEETS 1 AND 2
APPROVED 29 May 53 REVISED (A) 26 May 59 (B) 24 Oct.

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11
Other Cust Army - AV
Navy - AS

TITLE: INSERT, [illegible]RES HELICAL COIL COARSE THREAD, 3 DIA NOMINAL LENGTH

MILITARY STANDARD
MS 122236 THRU 122275
SHEET 2 OF 2

PROCUREMENT SPECIFICATION: MIL-I-8846
SUPERSEDES: MS21208 IN PART

☆ U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/3415

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.