
NOTE APPROVAL OF THIS FINAL DRAFT IS SUBJECT TO PREPARING ACTIVITY REVIEW DO NOT USE FOR ACQUISITION PURPOSES

FED SUP CLASS
5935

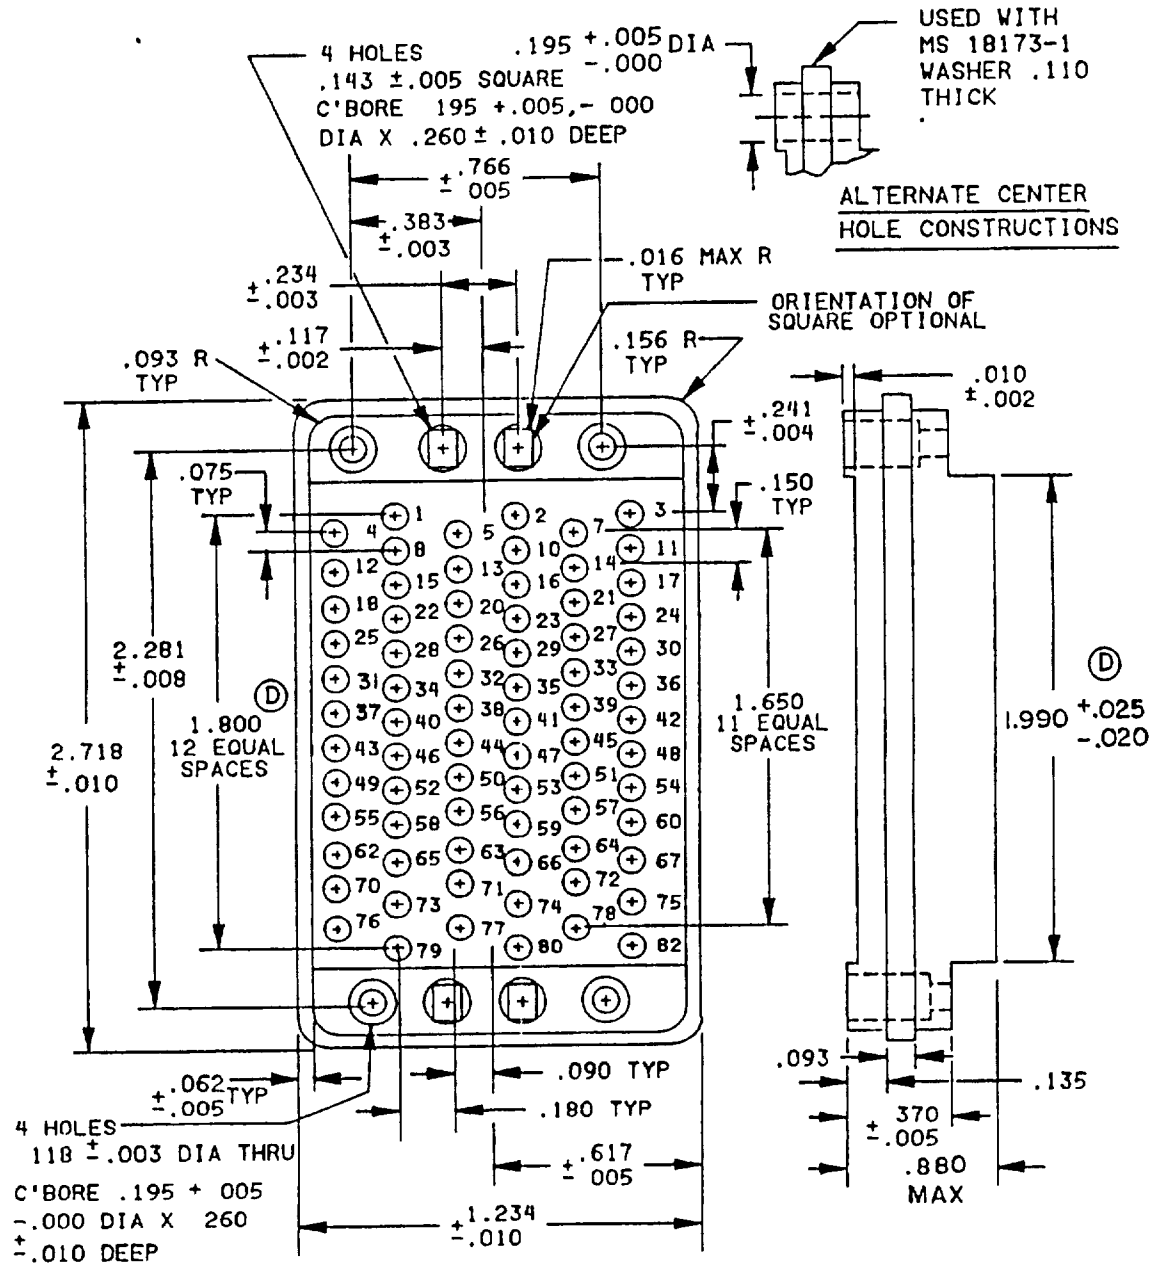

Design standard for use with MIL-C-28748/4

MS part number MS18188-1 - Suitable for all applications
MS part number MS18188-2 - For long jackscrews and hood only (through hole alternate construction)

(D) denotes changes

P A Navy - EC Other Cust AF - 85 Army - CR	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, ELECTRICAL, 75 (SIZE 16 AND 20 CRIMP REMOVABLE) SOCKET CONTACTS.	MILITARY STANDARD MS18188
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 1 MAY 73 672 AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3703-02

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil - Downloaded: 2026-01-23T14:16Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - ME, AR Navy - MC, OS Air Force -

Review activities: Army - MI, AT Navy - AS, SH Air Force - 11 DLA - ES

APPROVED 20 December 1965 REVISED (A) 20 May 1970 (B) 23 June 1972 (C) 18 March 1985 (D) 19 July 1988

(D)

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.093	2.36	.260	6.60
.003	0.08	.110	2.79	.370	9.40
.004	0.10	.117	2.97	.383	9.73
.005	0.13	.118	3.00	.617	15.67
.008	0.20	.135	3.43	.766	19.46
.010	0.25	.143	3.63	.856	21.74
.016	0.41	.150	3.81	1.234	31.34
.020	0.51	.156	3.96	1.650	41.91
.025	0.64	.180	4.57	1.800	45.72
.062	1.51	.196	4.95	1.990	50.55
.075	1.91	.234	5.94	2.281	57.94
.090	2.29	.241	6.12	2.718	69.04

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 015 (0.38 mm).
3. Metric equivalents are given for general information only.
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. (D) In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. (D) Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
8. Designed for use with MIL-C-39029/34 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 93.7 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

APPROVED 20 December 1965 REVISED (D) For changes see pages 1 and 2

User activities: Army - ME, AM, AR; Navy - MC, OS; Air Force -

Review activities: Army - MI, AT; Navy - AS, SH; Air Force - 11; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA: Navy - EC Other Cust: AF - 85, Army - CR	International Interest	TITLE: INSERT (INSULATOR), RECTANGULAR CONNECTOR, ELECTRICAL, 75 (SIZE 16 AND 20 CRIMP REMOVABLE) SOCKET CONTACTS.	MILITARY STANDARD MS18188
Procurement Specification: MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.