
FED. SUP CLASS
4730

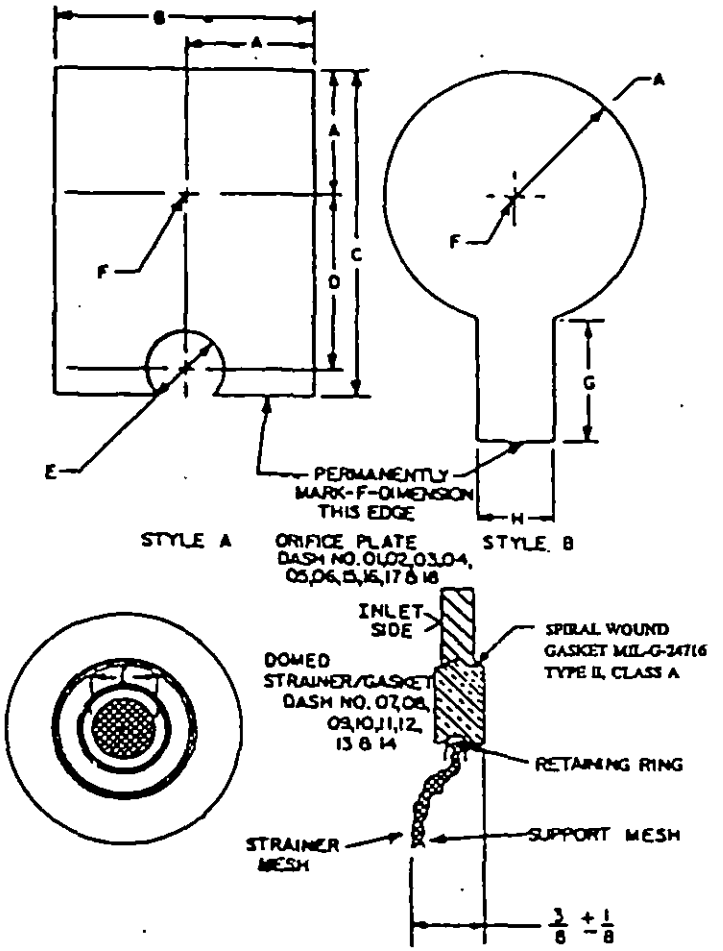

(B) Denotes changes
(Project 4730-N081)

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

APPROVED 7 July 1972 REVISED (A) 1 October 1974 (B) 28 February 1992

P. A. SH Other Cost (B)	INTERNATIONAL INTEREST	TITLE: HIGH PRESSURE DRAIN ORIFICE PLATES AND STRAINERS	MILITARY STANDARD MS 18301(SH) (B)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 3

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

DASH NO.	SERIES	IPS	A ± 1/64	B ± 1/64	C ± 1/32	D ± 1/64	E ± 1/64	F ± .001	G ± 1/64	H ± 1/64	I MI.
01	1500	1/2	1- 1/4	2-1/2	2-15/16	1- 5/8	7/8	0.020	1- 1/8	3/4	
02	1500	3/4	1- 3/8	2-3/4	3- 3/16	1- 3/4	7/8	0.020	1- 3/16	3/4	
03	600	1/2	1- 1/16	2-1/8	2- 7/16	1-5/16	5/8	0.031	13/16	3/4	
04	600	3/4	1- 5/16	2-5/8	3	1- 5/8	3/4	0.031	1	3/4	
05	150	1/2	15/16	1-7/8	2- 3/16	1-3/16	5/8	0.031	13/16	3/4	
06	150	3/4	1- 1/8	2-1/4	2- 9/16	1- 3/8	5/8	0.031	13/16	3/4	
07	1500	1/2									1/2
08	1500	3/4									3/4
09	600	1/2									1/2
10	600	3/4									3/4
11	150	1/2									1/2
12	150	3/4									3/4
13	1500	1									1
14	600	1									1
15	1500	1/2	1- 1/4	2-1/2	2-15/16	1- 5/8	7/8	0.036	1- 1/8	3/4	
16	1500	3/4	1- 3/8	2-3/4	3- 3/16	1- 3/4	7/8	0.036	1- 3/16	3/4	
17	1500	1	1- 9/16	3-1/8	3- 5/8	2	1	0.020	1- 3/8	3/4	
18	600	1	1- 7/16	2-7/8	3- 1/4	1- 3/4	3/4	0.031	1	3/4	

NOTES:

1. Orifice plate shall be constructed of 1/4 inch thick, type 304 corrosion-resistant steel plate. Surface finish in gasket contact area shall not exceed 500 roughness height rating (R.H.R.).
2. Orifice plates, dash numbers 01, 02, 03, 04, 05, 06, 15, 16, 17, and 18 may be constructed in either style A or style B at manufacturer's option.

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

APPROVED 7 July 1972 REVISED (A) 1 October 1974 (B) 28 February 1992

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

P. A. SH Other Cust (B)	INTERNATIONAL INTEREST	TITLE HIGH PRESSURE DRAIN ORIFICE PLATES AND STRAINERS	MILITARY STANDARD MS18301(SH) (B)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 2 OF 3

DD FORM 672-1 (LIMITED COORDINATION)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

3. Orifice plate material shall be certified. Mill certification of materials will be accepted in lieu of performing chemical and physical tests.
4. Domed strainer/gasket dash numbers 07, 08, 09, 10, 11, 12, 13, and 14:
   (a) Strainer portion of strainer/gasket assembly shall be constructed of type 18-8 corrosion-resisting steel alloy.
      (1) Strainer mesh shall be 60X60 mesh with 0.0075 inch diameter wire.
      (2) Support mesh shall be 16X16 mesh with 0.018 inch diameter wire.
      (3) Retaining ring shall be crimped to hold strainer and support mesh together.
   (b) Strainer shall be positively retained as an integral part of a spiral wound gasket in accordance with MIL-G-24716, type II, class A; series (as specified by dash number). (B)
      (1) Gasket compression characteristics shall not be affected by the strainer.
      (2) Metal outer ring shall be permanently marked "inlet" on the strainer mesh side.
5. Pieces detailed on this military standard are designed for use in conjunction with gaskets specified as MIL-G-24716, type II, class A and flanges specified in ANSI B16.5. (B)
6. Break sharp edges.
7. All dimensions are in inches.
8. Dimension F shall be inspected in accordance with the requirements of MIL-STD-105, level I with an Acceptance Quality Level (AQL) of 1.0 percent.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitation for bid.

APPROVED 7 July 1972 REVISED (A) 1 October 1974 (B) 28 February 1992

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

P. A. SH Other Cust (B)	INTERNATIONAL INTEREST	TITLE: HIGH PRESSURE DRAIN ORIFICE PLATES AND STRAINERS	MILITARY STANDARD
			MS 18301(SH) (B)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES		SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.