

FED. SUP CLASS
5940

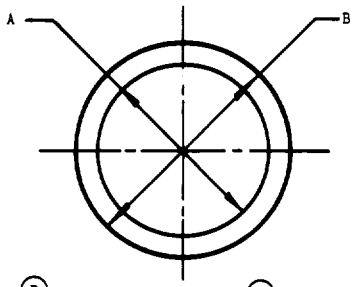

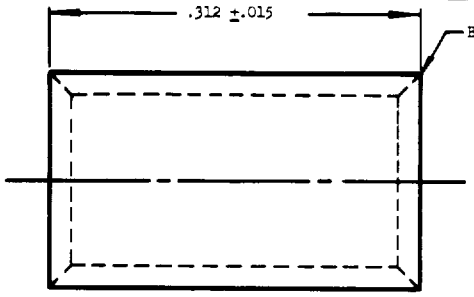

DASH NO.	COLOR CODE	A DIA		B DIA	
		MIN	MAX	MIN	MAX
-046	NO COLOR	.043	.049	.067	.073
-058	YELLOW	.055	.061	.080	.086
-063	RED	.060	.066	.085	.091
-071	GREEN	.068	.074	.093	.099
-080	BLUE	.077	.083	.101	.107
-090	ORANGE	.087	.093	.111	.117
-096	PURPLE	.093	.099	.116	.122
-101	YELLOW	.098	.104	.121	.127
-109	RED	.106	.112	.128	.134
-115	NO COLOR	.112	.118	.143	.149
-124	GREEN	.121	.127	.142	.148
-128	NO COLOR	.125	.131	.149	.155
-134	ORANGE	.131	.137	.153	.159
-149	BLUE	.146	.152	.176	.182
-156	RED	.153	.159	.189	.195
-165	NO COLOR	.162	.168	.191	.197
-175	GREEN	.172	.178	.212	.218
-187	YELLOW	.184	.190	.224	.230
-194	BLUE	.191	.197	.222	.229
-205	ORANGE	.202	.208	.242	.248
-219	NO COLOR	.216	.222	.240	.253
-225	YELLOW	.222	.228	.253	.259
-232	RED	.229	.235	.260	.266
-250	GREEN	.247	.253	.278	.284
-261	BLUE	.258	.264	.294	.300
-266	NO COLOR	.263	.269	.294	.300
-275	ORANGE	.272	.278	.303	.309
-281	YELLOW	.278	.284	.328	.334
-287	NO COLOR	.284	.290	.324	.330
-297	RED	.294	.300	.332	.338
-312	PURPLE	.309	.315	.359	.365
-348	ORANGE	.345	.351	.397	.403
-375	BLUE	.372	.378	.403	.409

(D)

SUPERSEDED MS25311 ONE-PIECE FERRULE DASH NO.	REPLACED BY TWO-PIECE COMBINATION (REF)	
	MS21981 INNER FERRULE DASH NO.	MS21980 OUTER FERRULE DASH NO.
-90	-058	-128, -149, -156
-100	-063	-156, -175
-110	-080	-156, -175, -187
-120	-101	-187, -194, -199
-130	-115	-199, -205, -219
-150	-134	-225, -232, -261
-160	-156	-232, -261, -275
-180	-175, -187	-287, -297
-200	-205, -219	-312, -327, -348

(D)

UNINSULATED TWO-PIECE COMBINATION (REF)	
MS21981 INNER FERRULE DASH NO.	MS21980 OUTER FERRULE DASH NO.
-058	-128, -149, -156
-063	-156, -175
-080	-156, -175, -187
-101	-187, -194, -199
-115	-199, -205, -219
-134	-225, -232, -261
-156	-232, -261, -275
-175, -187	-287, -297
-205, -219	-312, -327, -348

MATERIAL:
BRASS ALLOY, ROCKWELL B61 to B90.

FINISH:
TIN PLATED, PER MIL-T-10727, TYPE 1. COLOR CODE IN ACCORDANCE WITH TABLE.

NOTES:
(D) 1. MS18121 OUTER FERRULES ARE USED WITH MS21981 INNER FERRULES AS AN INSULATED REPLACEMENT. MS21980 OUTER FERRULES ARE USED WITH MS21981 INNER FERRULE AS AN UNINSULATED REPLACEMENT.
2. REMOVE ALL BURRS AND SHARP EDGES. CHAMFER OR ROUNDED EDGES ACCEPTED.
3. DIMENSIONS IN INCHES.
(D) 4. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.

(D) REVISED

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. NAVY - AS Other Cust USAF - 85	TITLE FERRULE, INNER, UNINSULATED, SHIELD TERMINATING, TYPE I TWO-PIECE, CLASS I, FOR SHIELDED CABLE	MILITARY STANDARD MS21981
ACQUISITION SPECIFICATION MIL-F-21608	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 67 672-1 (Limited coordination)
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. ☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-813/A-1660

Project No. 5940-0944

APPROVED 12 Oct 64 REVISED (A) 20 Jan 65 (B) 1 Jul 65 (C) 16 SEP 68 (D) 13 Aug 82

User activities: Army - MC, Navy - , USAF -

Review activities: Navy - EC, USAF - 11, 17, 99

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5940

(D)

INCHES	mm	INCHES	mm
.043	1.09	.189	4.80
.049	1.24	.190	4.83
.055	1.40	.191	4.85
.060	1.52	.195	4.95
.061	1.55	.197	5.00
.066	1.68	.202	5.13
.067	1.70	.208	5.28
.068	1.73	.212	5.38
.073	1.85	.216	5.49
.074	1.88	.218	5.54
.077	1.96	.222	5.64
.080	2.03	.224	5.69
.083	2.11	.228	5.79
.085	2.16	.229	5.82
.086	2.18	.230	5.84
.087	2.21	.235	5.97
.091	2.31	.240	6.10
.093	2.36	.242	6.15
.098	2.49	.247	6.27
.099	2.51	.248	6.30
.101	2.57	.253	6.43
.104	2.64	.258	6.55
.106	2.69	.259	6.58
.107	2.72	.260	6.60
.111	2.82	.263	6.68
.112	2.84	.264	6.71
.116	2.95	.266	6.76
.117	2.97	.269	6.83
.118	3.00	.272	6.91
.121	3.07	.278	7.06
.122	3.10	.284	7.21
.125	3.18	.290	7.37
.127	3.23	.294	7.47
.128	3.25	.300	7.62
.131	3.33	.303	7.70
.134	3.40	.309	7.85
.137	3.48	.315	8.00
.142	3.61	.324	8.23
.143	3.63	.328	8.33
.146	3.71	.330	8.38
.148	3.76	.332	8.43
.149	3.78	.334	8.48
.152	3.86	.338	8.59
.153	3.89	.345	8.76
.155	3.94	.351	8.92
.159	4.04	.359	9.12
.162	4.11	.365	9.27
.168	4.27	.372	9.45
.172	4.37	.378	9.60
.176	4.47	.397	10.08
.178	4.52	.403	10.24
.182	4.62	.409	10.39
.184	4.67		

REVIEWER SYMBOLS:
Navy - EC
USAF - 11, 17, 99

USER SYMBOLS:
Army -
Navy - MC
USAF -

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 Oct 64 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

P.A.
NAVY — AS
Other Cust
USAF - 85

TITLE
FERRULE, INNER, UNINSULATED, SHIELD TERMINATING TYPE I, TWO-PIECE, CLASS I, FOR SHIELDED CABLE

MILITARY STANDARD
MS21981

PROCUREMENT SPECIFICATION
MIL-F-21608

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23468

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.