INCH-POUND

MS24178J
07 September 2021
SUPERSEDING
MS24178H
w/ AMENDMENT 2
22 October 2004

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 55 AMPERES, 2PST, (N.O.) TYPE II, NONHERMETICALLY SEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

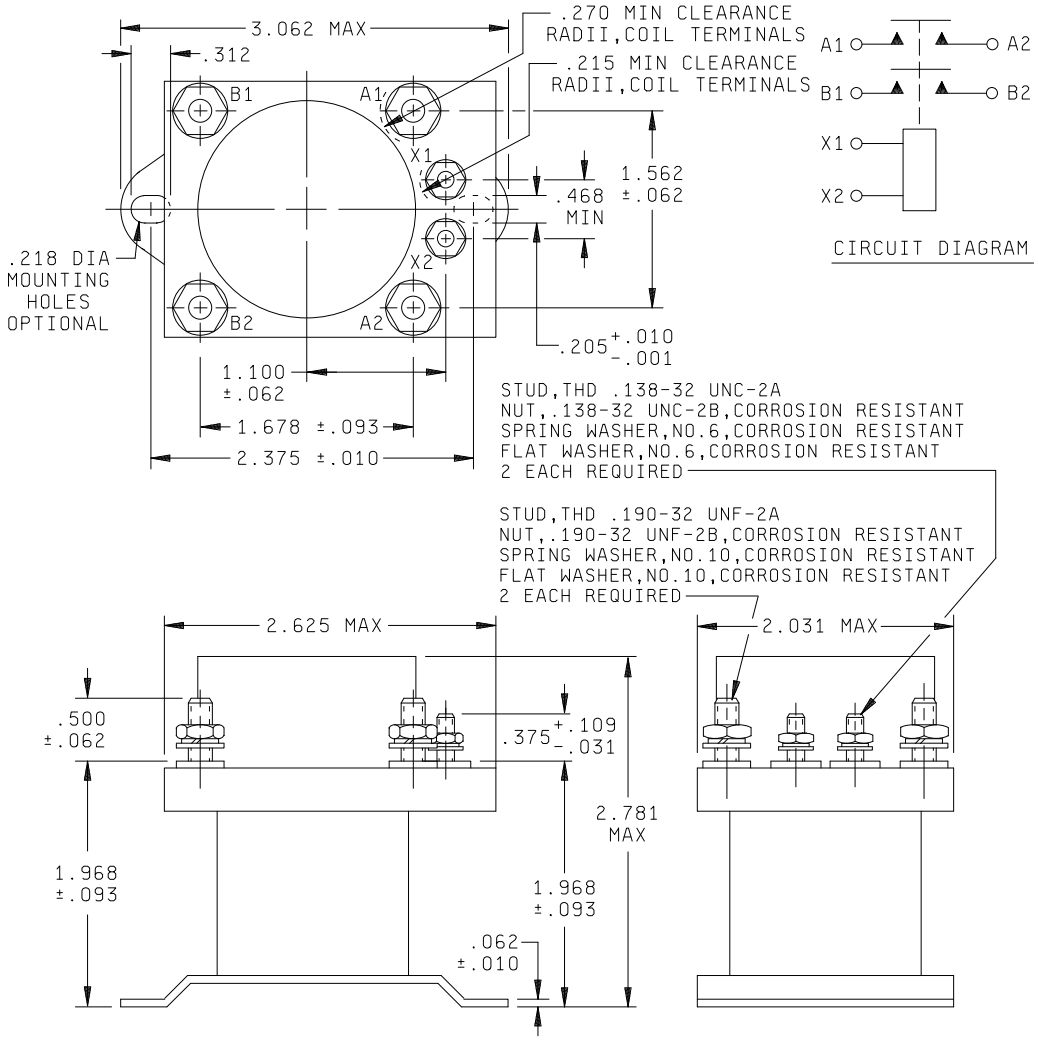


FIGURE I. Outline drawing (for details see tables I and II).

AMSC N/A
FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.03	.138	3.51	.312	7.92	1.968	49.99
.010	.25	.190	4.83	.375	9.53	2.031	51.59
.031	.79	.205	5.21	.468	11.89	2.375	60.33
.062	1.57	.215	5.46	.500	12.70	2.625	66.68
.093	2.36	.218	5.54	1.100	27.94	2.781	70.64
.109	2.77	.270	6.86	1.687	42.85	3.062	77.77

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified, tolerances are ±.031.
4. Additional flat washer may be used for terminal seat.
5. Part No. MS24178-D1 replaces part No. MS24178-1.
6. For design feature purposes, this specification takes precedence over procurement documents referenced herein.
7. Referenced Government documents of the issue listed in that issue of the Acquisition Streamlining and Standardization Information System (ASSIST) specified in the solicitation forms a part of this specification sheet to the extent specified herein.
8. Cadmium or cadmium compounds are prohibited on external hardware. A transition period to non-cadmium hardware is authorized for up to 1 year from the date of this revision.
9. Spring washer on drawing is a spring lock washer.

FIGURE I. Outline drawing (for details see tables I and II) - Continued.

TABLE I. Dash numbers and characteristics.

MS part number	Type	Coil	Terminal type	Mounting or mating socket	Auxiliary contacts	Max weight in pounds
MS24178-D1	III	dc	Stud	Bracket	N/A	.75

TABLE II. Operating characteristics.

PIN MS 24178-	Coil data											Time - (milliseconds maximum) 2/					
	Coil	Nominal			Max		Max pick-up voltage			Drop out volt-age 1/	Hold volt-age 1/	Oper-ate 3/	Re-lease 4/	Bounce			
														Main		Aux	
		Volts 1/	Freq Hz	Ω Res +15% -10	Volts	Amp	Nor-mal 1/	High Temp test	Cont cur-rent test					NO	NC	NO	NC
D1	X1, X2	28	dc	59	29	.50	18	21	22.5	1.5	7	30	10	3.5	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

TABLE III. Rated contact load (amperes per pole) case grounded.

Type of load	Life operat-ing cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 3/			
		Main		Aux		Main		Aux		Main		Aux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
Resistive	50	55				55							
Inductive	10	40											
Motor	50	40				35							
Lamp													
Transfer load													2/
Mechanical life reduced current	100	14											
Mixed loads	50	5											

NOTES, APPLICATION

1/ Over temperature range.
2/ With nominal coil voltage.
3/ Absence of value indicates relay is not rated for 3 phase applications.

Electrical characteristics:

Temperature range	-55°C to +71°C
Maximum altitude rating	50,000 ft
Shock G-level	25 g's
Duration	6-9 ms
Max duration contact opening	2 ms

Vibration - sinusoidal (see table IV)

TABLE IV. Vibration levels.

Dash number	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
D1	.08 DA	.06 DA	2 g's	2 g's	

Vibration - Random	N/A
Applicable spec	N/A
Power spectral density	N/A
Rms g min	N/A
Frequency range	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

Curve N/A

High shock N/A

Acceleration 10 g's

Electrical characteristics:

Min insulation resistance, initial: 100 megohms.

After life or environmental tests: 50 megohms.

Dielectric strength (sea level): 2-5 seconds.

	Initial		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	N/A	1,000 V rms	N/A
Aux contacts	1,250 V rms	N/A	1,000 V rms	N/A
All other points	1,250 V rms	1,500	1,000 V rms	1,125

Dielectric strength (altitude): 1 minute.

	28 V dc	115 V ac
Coil to case	500	500
Aux contacts	500	500
All other points	500	500

Max contact drop initial: 0.150 volt.

After life test: 0.175 volt.

Overload current (NO) 440 amperes.

Rupture current (NO) 550 amperes.

Duty rating Continuous.

RFI spec MIL-STD-461.

(Applicable to coil circuits of ac operated relays)

Qualification by similarity: See MIL-PRF-6106.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:
MIL-STD-461

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing Activity
DLA - CC

(Project 5945-2021-027)

Review activity:
Navy - EC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.