
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the BuWep (Department of the Navy) and the USAF and is mandatory for use by Department of the ... their activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
62h0

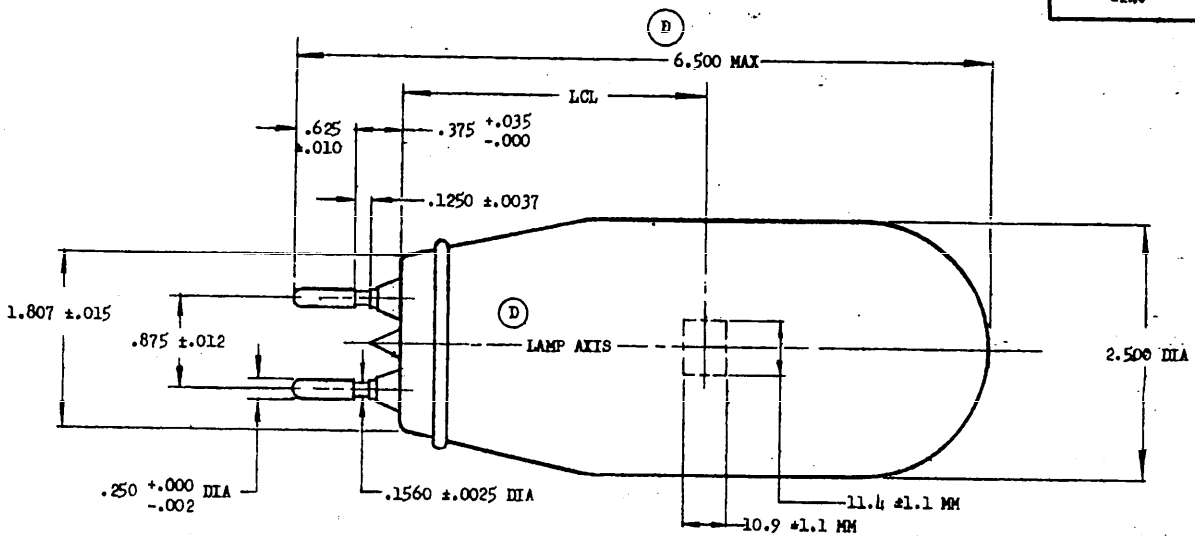

DASH NO.	INITIAL WATTS ± 30	RATED AMPERES	RATED INITIAL LUMENS (NOMINAL)	INITIAL EFFICIENCY (LPW) ±2	FILAMENT TYPE	RATED AVERAGE LABORATORY LIFE (HRS)	FINISH	LCL
(a) ~~-1~~	~~500~~		~~11,000~~	~~22~~		~~500~~		
(b) ~~-2~~	~~502~~	20			C-13			~~2.500~~
D (c) ~~-3~~	~~499~~		~~11,900~~	~~23.8~~		~~300~~	CLEAR	~~2.656~~
D -4	503	20	11,000	22	C-13	500	CLEAR	2.656

(a) PART NUMBER MS2h321-1 INACTIVE FOR DESIGN AFTER 16 FEBRUARY 1960.
(b) PART NUMBER MS2h321-2 INACTIVE FOR DESIGN AFTER 1h JUNE 1961.
D (c) PART NUMBER MS2h321-3 INACTIVE FOR DESIGN AFTER 26 MARCH 1963.
DIMENSIONS IN INCHES, EXCEPT AS SPECIFIED. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON INCHES: DECIMALS ±.062.
AXIAL ALINEMENT TOLERANCE OF FILAMENT: ±.031.
D MAXIMUM EXCURSION RADIUS OF BULB FROM LAMP AXIS: 1.562.
MAXIMUM WATTAGE INCREASE DURING LIFE: 10 PERCENT.
D BURNING POSITION: BASE DOWN.
A COLLECTOR GRID SHALL BE PROVIDED.
ANY SUITABLE FILAMENT SUPPORTING STRUCTURE MAY BE UTILIZED. THE FILAMENT SUPPORTING STRUCTURE SHALL OBSCURE NO PORTION OF THE FILAMENT WHEN THE ANGLE BETWEEN THE LINE OF SIGHT AND THE PLANE OF THE FILAMENT IS GREATER THAN 30°.

MINIMUM MARKING: WATTS, AMPERES, BASE DOWN, MS PART NUMBER, MANUFACTURER'S IDENTIFICATION.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 Apr 55 REVISED A 26 Jan 58 B 18 Feb 60 C 14 Jun 61 D 26 Mar 63

P.A. USAF - AFSC Other Cust Navy - Wep	TITLE LAMP, INCANDESCENT - T-20 BULB, MEDIUM BIPOST BASE	MILITARY STANDARD MS24321 (ASG)
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.