This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army; Navy - EC; Air Force - 11, 15, 80; DSA ES

User activities: Army; Navy; Air Force

DD FORM 10 APR 64 672 (Superseded/previous editions of this form are obsolete)

P A AF-17

Other Cust ARMY-EL NAVY-AS

Procurement Specification MIL C 38999

Interservice interest

SUPERSEDES MS27515(USAF)


TITLE CONNECTOR, RECEPTACLE, ELECTRIC CRIMP TYPE, BACK PANEL WALL MOUNTING FLANGE SERIES I

MILITARY STANDARD

MS27515

SHEET 1 OF 2

5935-1709-72

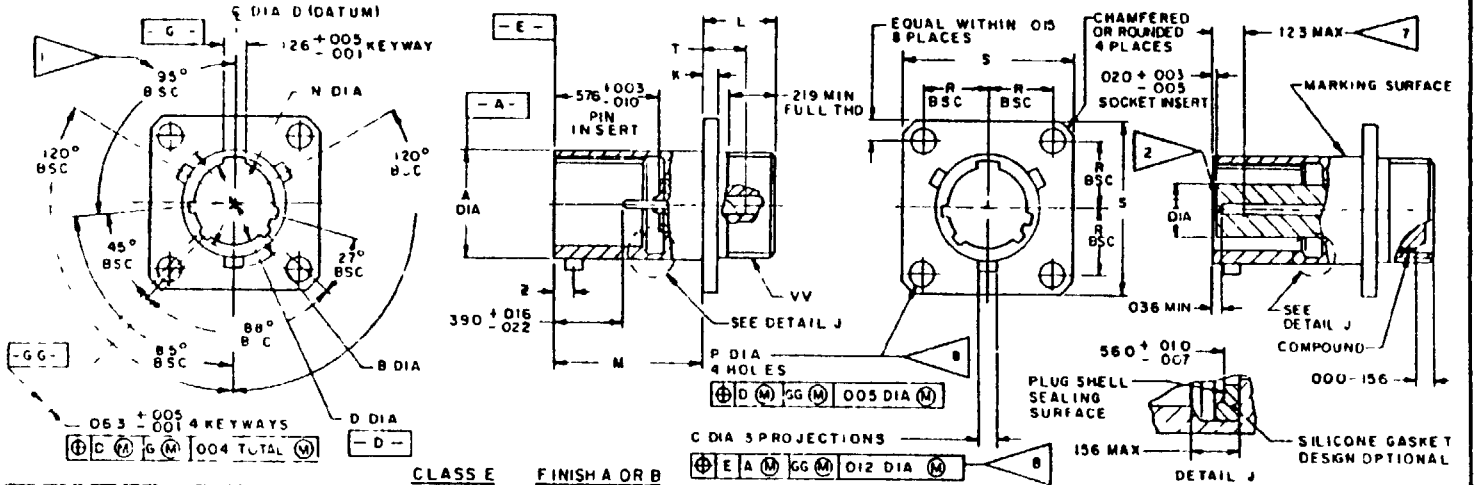

CLASS E FINISH A OR B

SHELL SIZE	A DIA +.001 -.005	B DIA +.000 -.016 OVER PROJ	C DIA +.006 -.002	D DIA +.005 -.001	T MAX DIA	K +.015 -.000	L MAX	M +.000 -.005	N DIA +.005 -.006	P DIA +.010 -.005	R BSC	S ±.020	T MAX	Z BSC	VV THD CLASS 2A (PLATED)	FOR INSERT ARR SEE DWG MS
9	.572	.662		.442	.290				.492		.3595	.938			.5625-24UNEF	20049,27525
11	.700	.810		.570	.418				.620		.406	1.031			.6875-24	20050,27526
13	.850	.960		.687	.532				.769		.453	1.125			.8125-20	20051,27527
15	.975	1.085	.078	.812	.657	.085	.469	.820	.894 -.019	.128	.4845	1.219	.156	.100	.9375-20	20052,27528
17	1.100	1.210		.937	.782						.531	1.312			1.0625-18	20053,27529
19	1.207	1.317		1.042	.871				1.124		.578	1.438			1.1875-18	20054,27530
21	1.332	1.442		1.167	.996				1.249		.625	1.562			1.3125-18	20055,27531
23	1.457	1.567		1.292	1.121	.115	.500	.790	1.374	.147	.6875	1.688	.188		1.4375-18	20056,27532
25	1.582	1.692	.125	1.417	1.246				1.499		.750	1.812		.109	1.5625-18	20057,27533

INACTIVE FOR NEW DESIGN
USE MS27656

FED SUP CLASS 5935

APPROVED 1 MAY 69

REVISED (B) 7 JULY 71

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:43Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army, Navy, Air Force

User activities: Army, Navy, Air Force

DD FORM 10 APR 64 672

PA AF-17

Other Cust ARMY-EL NAVY-AS

Procurement Specification M - [illegible]

International Interest

SUPERSEDES [illegible]

TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, BACK PANEL WALL MOUNTING FLANGE, BAYONET COUPLING, SERIES I

MILITARY STANDARD

MS 27515

SHEET 2

NOTES

A. NORMAL KEYWAY POSITION FOR OTHER KEYWAY POSITIONS SEE FIGURE 4 OF PROCUREMENT DOCUMENT

B. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 TOTAL INDICATOR READING

3. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T I R


4. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T I R AT MMC

5. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC

6. DIMENSIONS IN INCHES

C. THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING

D. THE GAGE FEATURES FOR GG SHALL BE .010 SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION

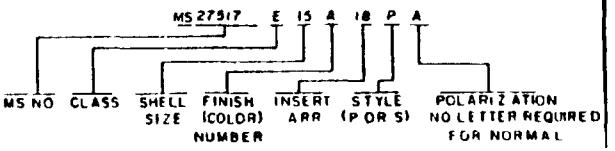

EXAMPLE OF PART NUMBER

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
000	.00	147	3 73	662	16 81	1.124	28 55
001	03	.156	3.96	687	17 45	1 125	28 58
002	05	188	4 78	.6875	17.46	1 167	29 64
003	08	219	5.56	.700	17 78	1 207	30 66
004	10	290	7.37	.750	19 05	1.210	30.73
005	13	3595	9.13	.769	19 53	1.219	30 96
006	15	.390	9 91	782	19 86	1.246	31.65
007	18	406	10 31	790	20 07	1.249	31.72
010	25	.418	10 62	810	20 57	1 292	32 82
012	30	442	11 23	812	20.62	1.312	33 32
015	38	453	11 51	.820	20.83	1 317	33.45
016	41	469	11.91	.850	21.59	1 332	33 83
020	51	4845	12 31	.871	22 12	1 374	34.90
022	56	492	12.50	894	22 71	1.417	35.99
036	91	500	12 70	.937	23 80	1.438	36.53
063	1 60	531	13.49	.938	23 83	1 442	36.63
078	1 98	.532	13.51	.960	24 38	1 457	37 01
085	2 16	.560	14 22	975	24 77	1 499	38.07
100	2 54	570	14 48	996	25 30	1.562	39 67
109	2.77	572	14 53	1 019	25 88	1 567	39 80
115	2 92	576	14 63	1 031	26.19	1.582	40.18
123	3.12	578	14 68	1.042	26 47	1.688	42.88
125	3 18	620	15 75	1.085	27 56	1.692	42.98
126	3 20	625	15 88	1.100	27 94	1 812	46.02
128	3 25	657	16 69	1 121	28 47		

FED SUP CLASS 5935

APPROVED

REVISED (B)

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:43Z
Check the source to verify that this is the current version before use.