

FED. SUP CLASS 6130

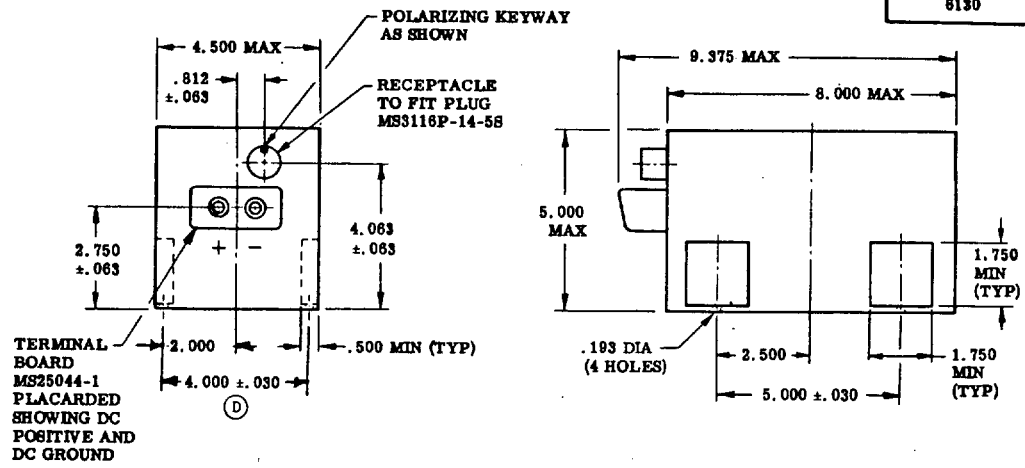

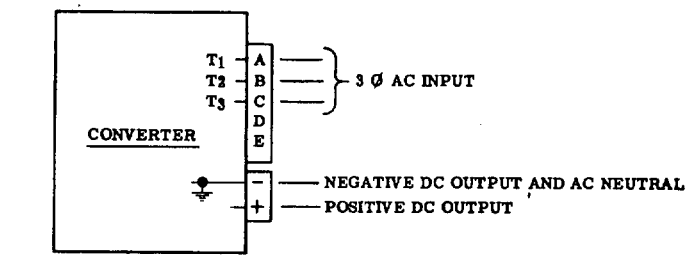

INPUT PHASE ROTATION A, B, C

DASH NO.
-1

TABLE I

FOR ANY COMBINATIONS OF CONDITIONS LISTED BELOW, THE OUTPUT VOLTAGE SHALL REMAIN WITHIN THE INDICATED LIMITS

CONDITIONS	OUTPUT VOLTAGE LIMITS
INPUT VOLTAGE VARIED BETWEEN 110/190 AND 120/208 VOLTS, AND INPUT FREQUENCY VARIED FROM 380 TO 420 Hz. LOAD VARIED FROM 10% TO FULL LOAD. AMBIENT TEMPERATURE - ALTITUDE VARIED WITHIN THE RANGE ESTABLISHED BY CURVE I OF MS33543 (ASG), EXCEPT THAT THE AMBIENT TEMPERATURE SHALL NEVER EXCEED 85° C. THE UNIT SHALL DELIVER NO LESS THAN A PROPORTIONAL DECREASE FROM RATED OUTPUT AT 50,000 FT TO 50% RATED OUTPUT AT 65,000 FT MOUNTED IN ANY POSITION.	LOW - 23.0 HIGH - 29.0

APPROVED 9 AUG 60 — REVISED (A) 27 MAR 62 (B) 25 SEPT 62 (C) 21 June 1968 (D) 15 Dec 69

P.A. NAVY - AS Other Cust ARMY - ME	TITLE CONVERTER, 50 AMPERE, CLASS B	MILITARY STANDARD MS 28133
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES: MS25179 AND MS28133(WEP)	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PLATE NO. 15320

USER SYMBOLS: REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 6130

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

NOTES:

1. THE WEIGHT AND VOLUME LIMITATIONS SHOWN ON THIS DRAWING SHALL INCLUDE THE WEIGHT AND VOLUME OF ALL AUXILIARY APPARATUS NECESSARY TO MAKE THIS UNIT CONFORM TO THE PROCUREMENT SPECIFICATION.

2. COOLING. THE UNIT SHALL BE SELF-COOLED WITH NO ROTATING PARTS.

3. RIPPLE VOLTAGE. THE PEAK TO PEAK RIPPLE OUTPUT VOLTAGE SHALL NOT EXCEED 2.0 VOLTS WHEN MEASURED USING A CALIBRATED OSCILLOSCOPE IN SERIES WITH A 4.0 MICROFARAD CAPACITOR. MEASUREMENTS SHALL BE MADE AT 5, 25, AND 50 AMPS LOAD CURRENT.

4. OVERLOAD. THE UNIT SHALL BE CAPABLE OF SUSTAINING A FAULT CURRENT LIMITED ONLY BY ITS OWN IMPEDANCE FOR A PERIOD OF .10 SECOND. THE UNIT SHALL BE CAPABLE OF PROVIDING THE FOLLOWING OVERLOAD CURRENTS:

   100 AMPERES FOR 5 SECONDS
   150 AMPERES FOR 1.65 SECONDS
   250 AMPERES FOR .575 SECONDS
   375 AMPERES FOR .25 SECONDS
   600 AMPERES FOR .10 SECONDS

5. INPUT POWER FACTOR SHALL BE NO LESS THAN 75% FROM HALF RATED TO RATED LOAD.

6. VIBRATION. THE UNIT SHALL MEET THE NORMAL REQUIREMENTS FOR VIBRATION TESTING PERFORMED TO THE FOLLOWING REQUIREMENTS AT ROOM AMBIENT CONDITIONS ONLY:

   DURABILITY. SIMPLE HARMONIC MOTION SHALL BE APPLIED TO THE MOUNTING BASE WITH A MAXIMUM TOTAL AMPLITUDE OF .03 INCH OVER A CYCLICAL FREQUENCY RANGE OF 10 TO 55 Hz WITH A CYCLE DURATION OF 1 TO 5 MINUTES. VIBRATION SHALL BE APPLIED FOR A PERIOD OF 2 HOURS IN THE DIRECTION OF EACH OF THE 3 MAJOR AXES.

   PERFORMANCE. ONE CYCLE OF A SIMPLE HARMONIC MOTION FREQUENCY SCAN AS FOLLOWS SHALL BE APPLIED TO THE MOUNTING BASE IN THE DIRECTION OF EACH OF THE 3 MAJOR AXES.

20 TO 60 Hz	MAX TOTAL EXCURSION OF .03 INCH
60 TO 500 Hz	ACCELERATION OF 10 G.

7. PARALLEL OPERATION IS NOT REQUIRED.

8. EFFICIENCY: AT SEA LEVEL, 25 ±15° C, HALF RATED LOAD TO FULL LOAD: 85% MIN.

9. WEIGHT: 8.0 MAX LBS. (D)

10. REPLACEMENT UNITS BUILT TO MIL-C-7115B, PARAGRAPH 4.3.1 (b), (e), AND (f) DO NOT APPLY FOR NAVY USE.

11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH USASI Y14.5-1966.

APPROVED 9 AUG 60 — REVISED (A) 27 MAR 62 (B) 25 SEPT 62 (C) FOR CHANGES SEE SHEETS 1 & 2 (D)

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME	TITLE CONVERTER, 50 AMPERE, CLASS B	MILITARY STANDARD MS 28133
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES: MS25179 AND MS28133(WEP)	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PLATE NO. 15820

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-093/S-3536

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.