FED SUP CLASS
5935

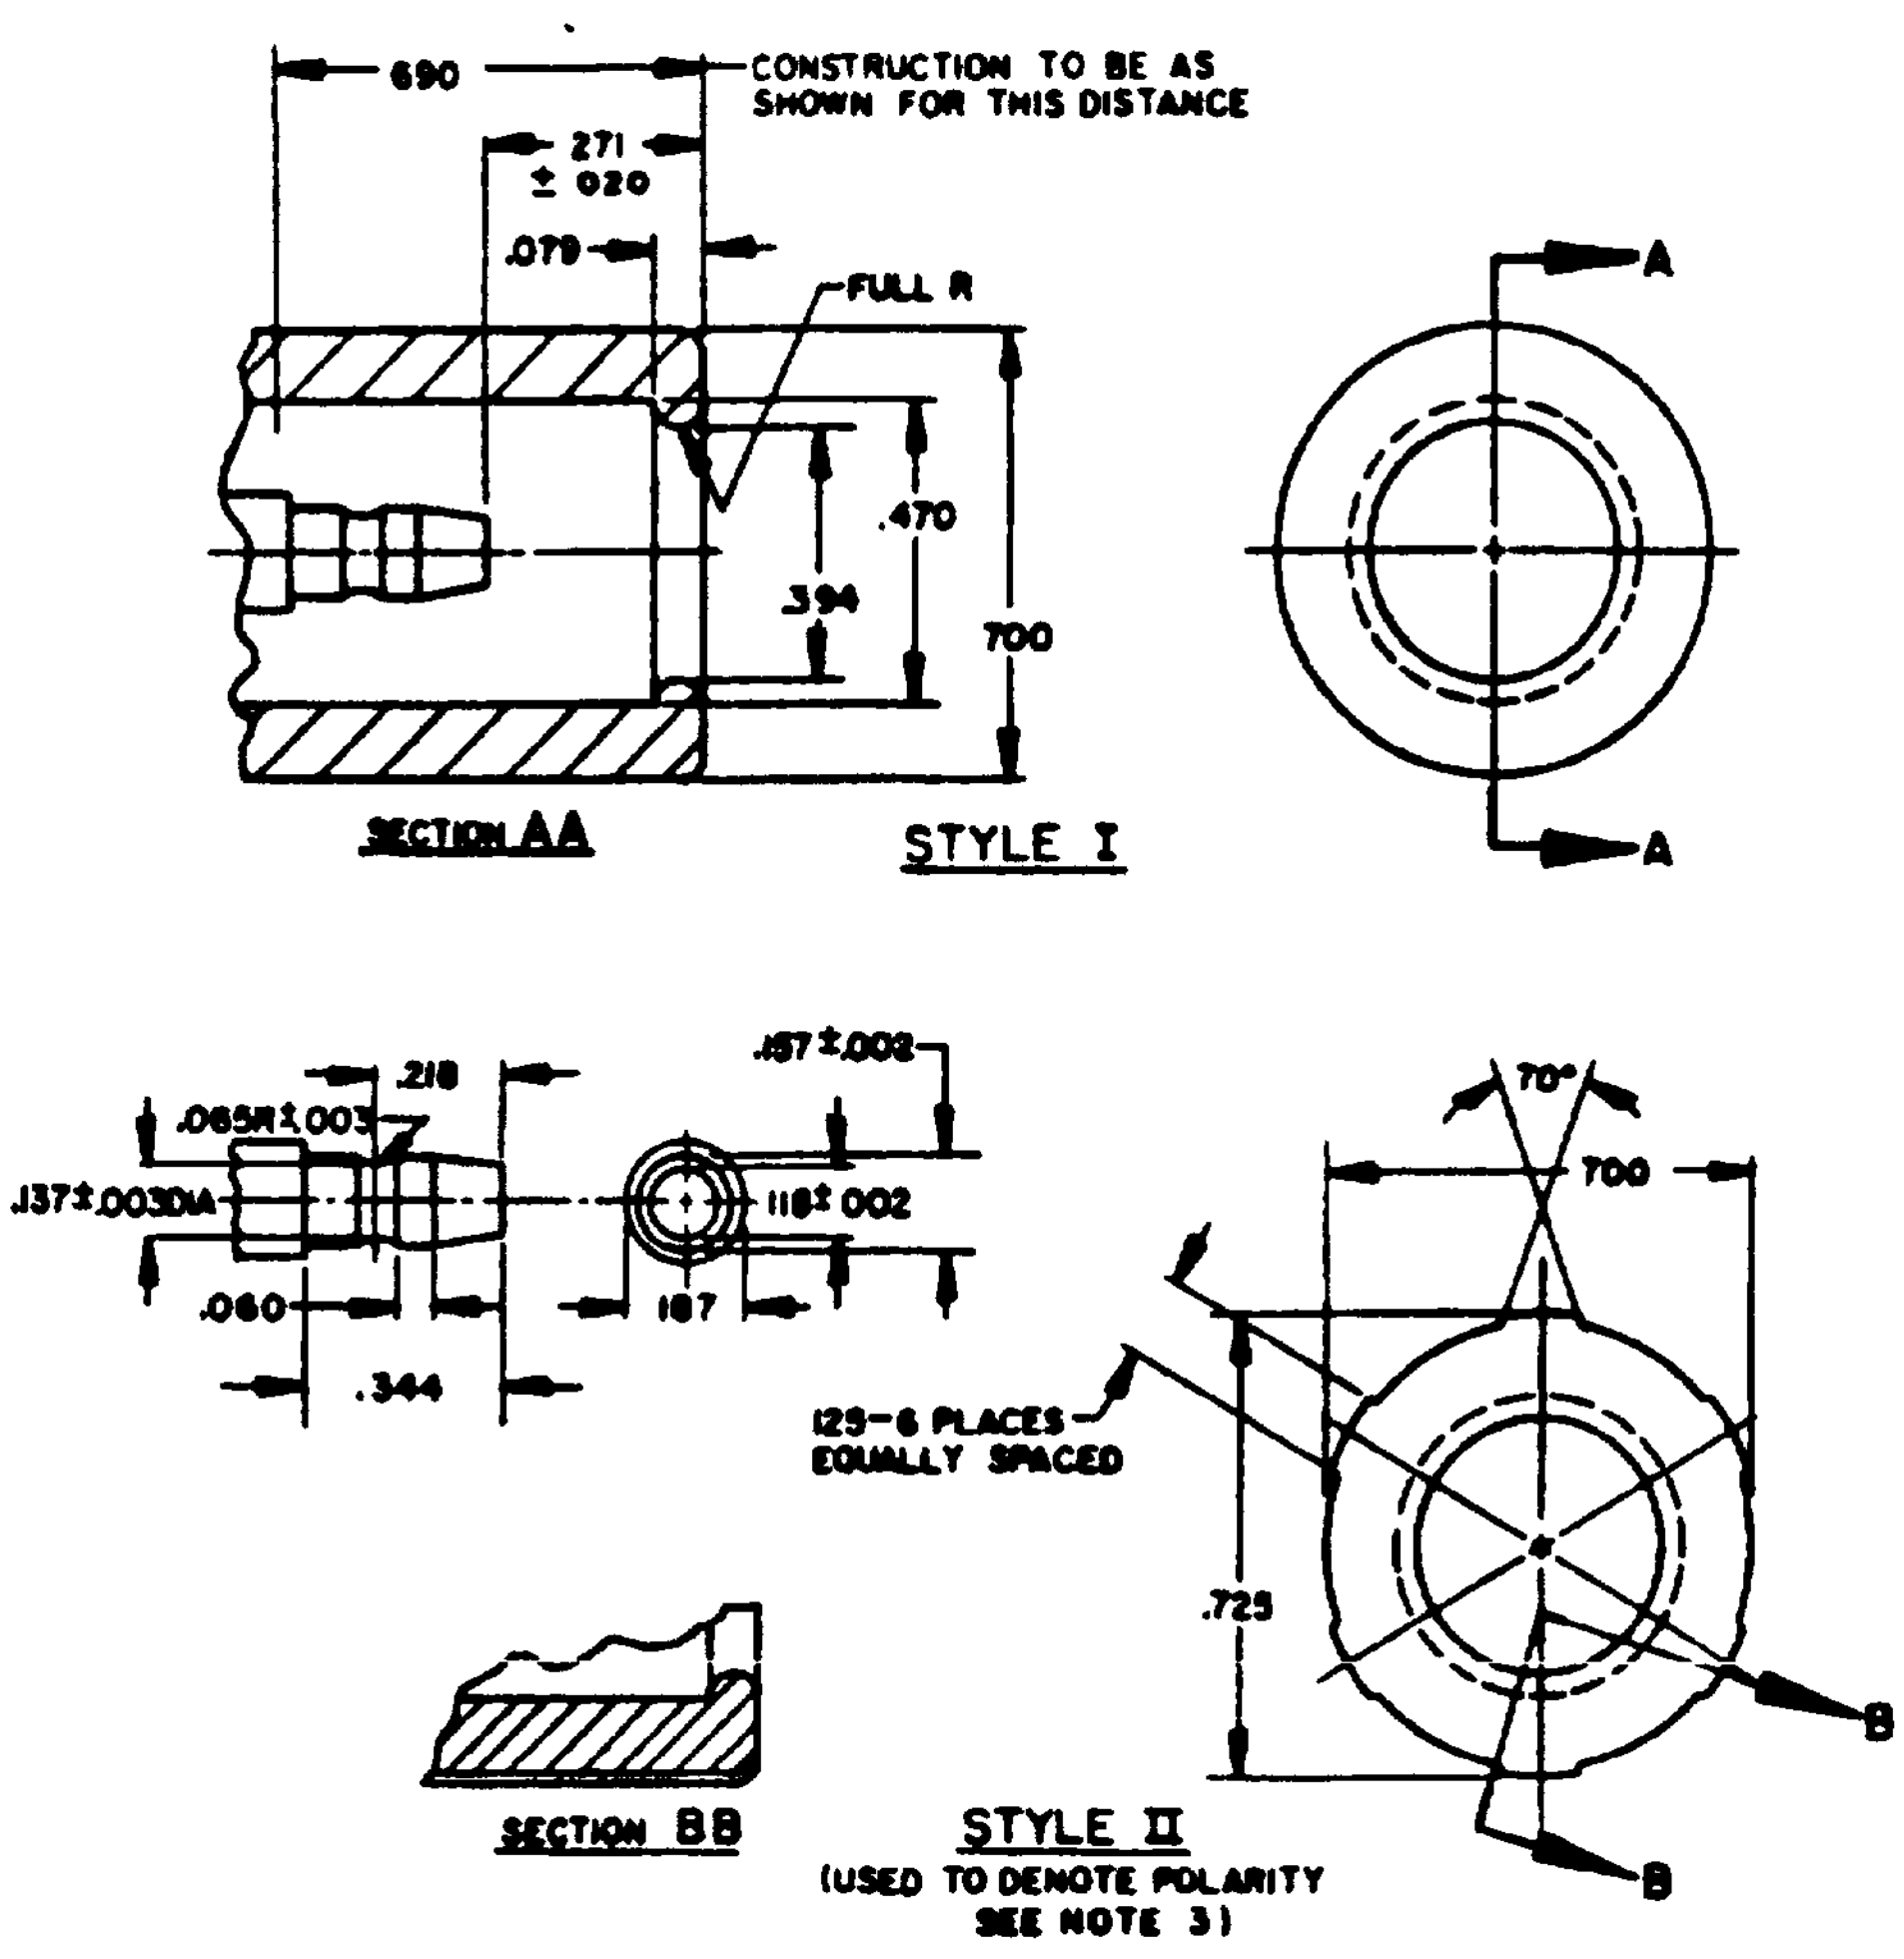

DIMENSIONS ARE IN INCHES

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.005 ON DECIMALS, ±1° ON ANGLES, AND ± .015 FOR RUBBER PRODUCTS

THIS IS A DESIGN STANDARD NOT TO BE USED AS AN MS PART NO.

Ⓓ DENOTE CHANGES

USER ACTIVITIES ARMY-GL
NAVY-MC, YD

REVIEWER ACTIVITIES ARMY-AR, ME, CR Ⓓ
DLA-ES Ⓓ

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 1 SEPT 1967 REVISED Ⓓ 28 JANUARY 1988

P. A. ARMY-AT Other Cust AF-85 NAVY-EC Ⓓ	INTERNATIONAL INTEREST STANAG 4040	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL — PIN CONTACT, NO. 12, 14 & 16 A W G WATERPROOF	MILITARY STANDARD MS33800
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 3

DD FORM 1 MAY 71 672-1 (COORDINATED)

5935-A321

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

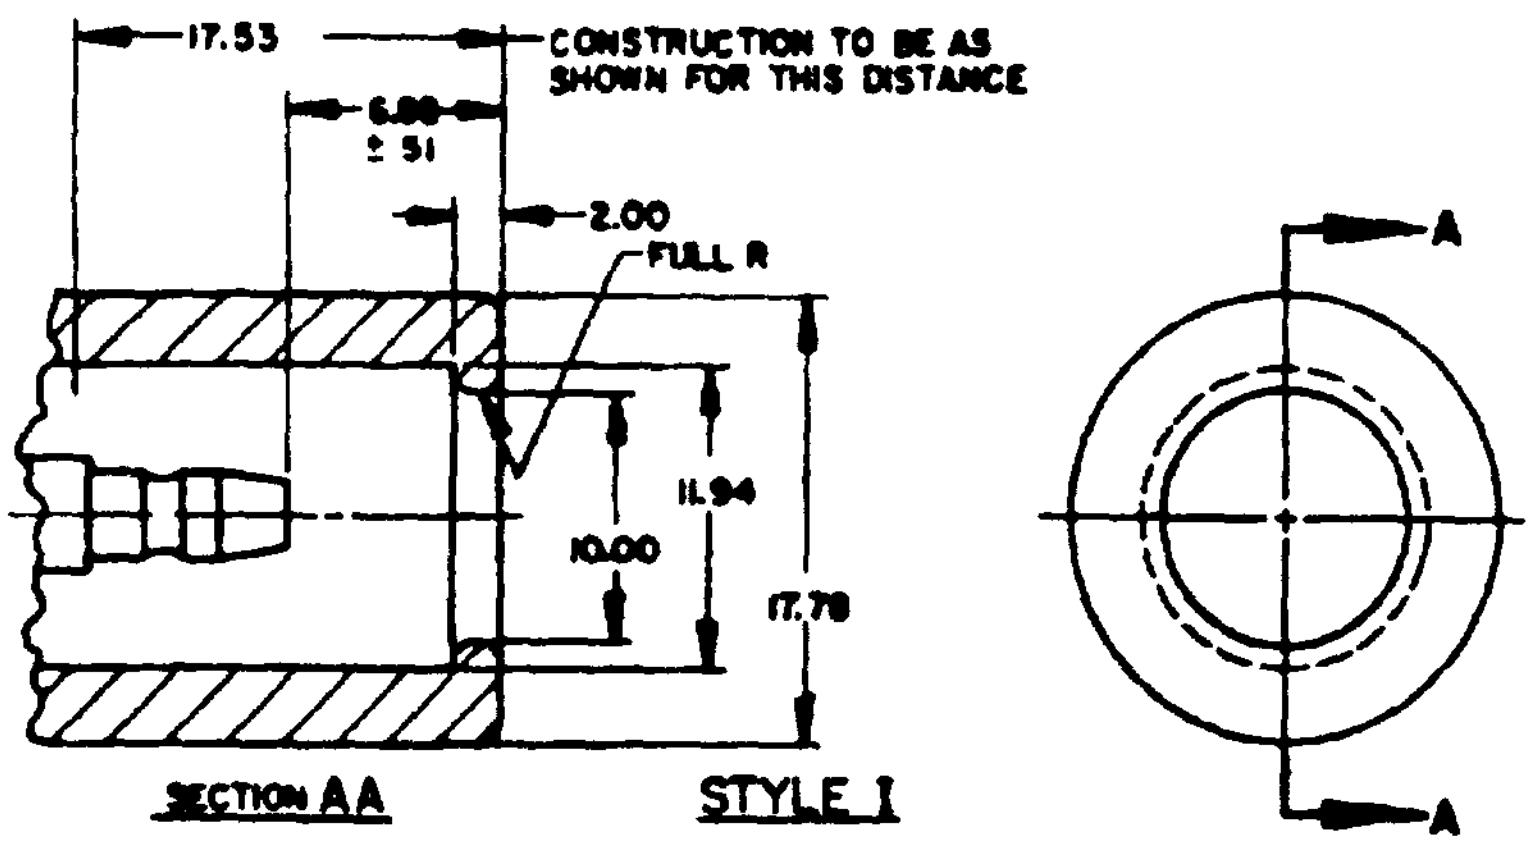

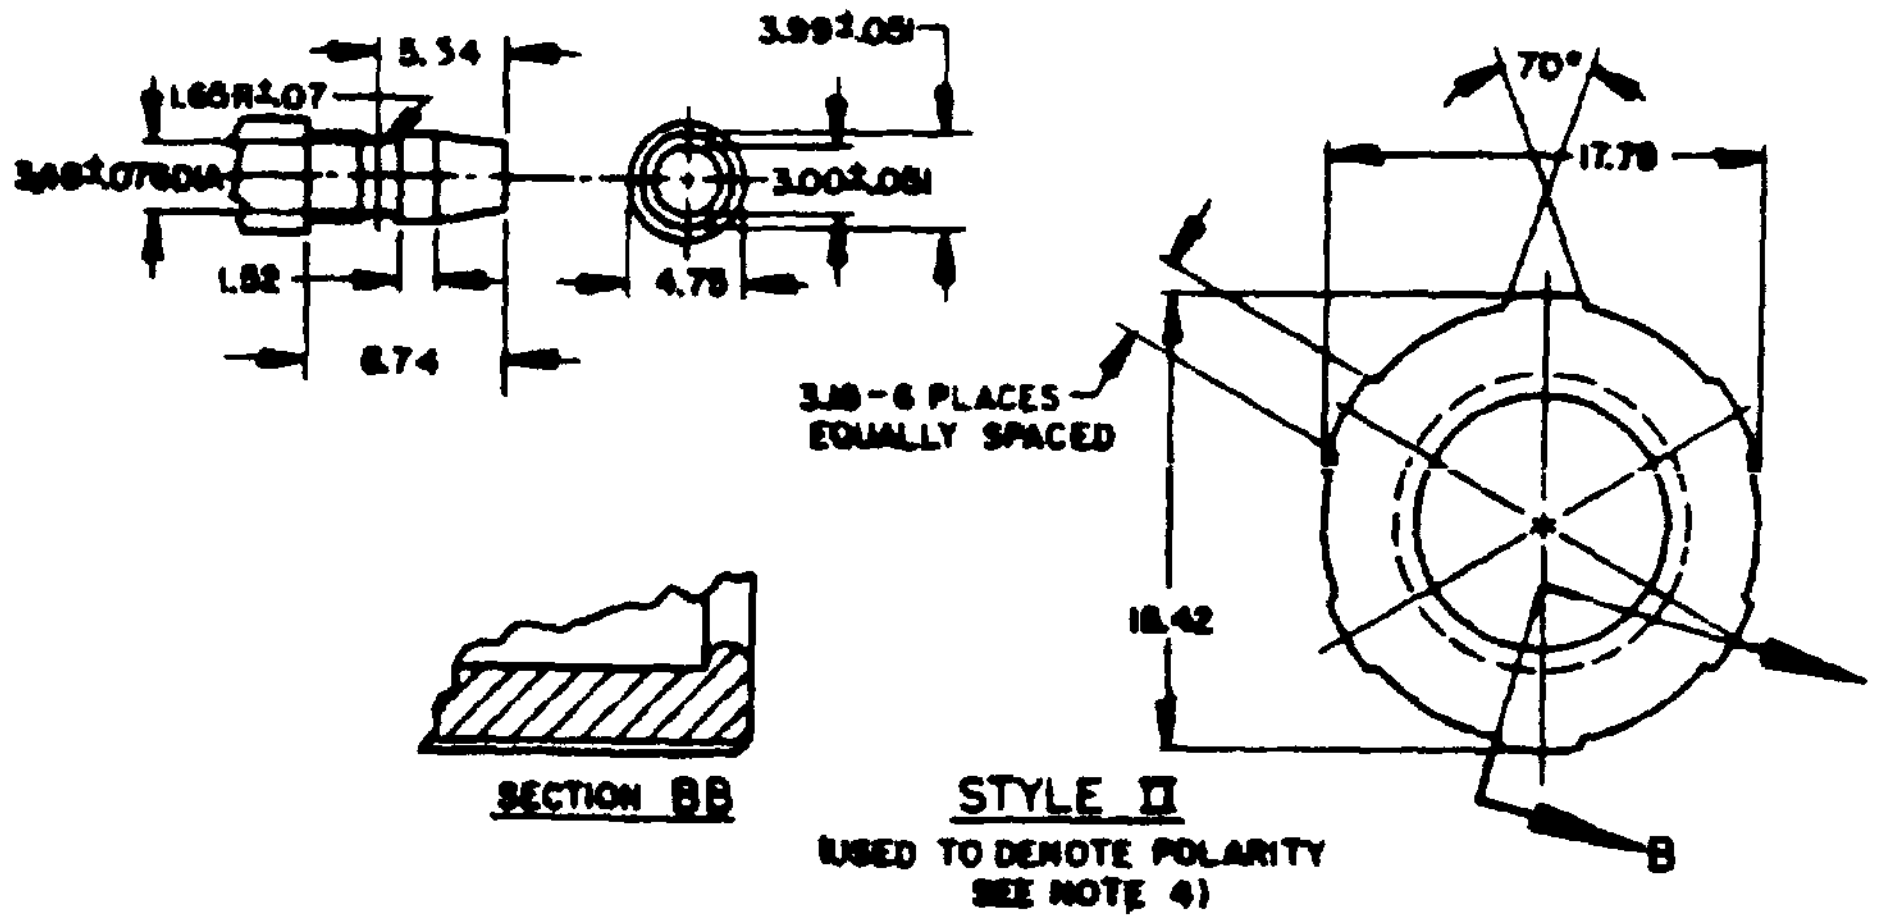

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .13 ON DECIMALS, ± 1° ON ANGLES, AND ± .38 FOR RUBBER PRODUCTS

THIS IS A DESIGN STANDARD NOT TO BE USED AS AN MS PART NO

APPROVED 1 SEPT. 1967 REVISED Ⓓ FOR CHANGES SEE PAGE 3

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A Other Cust	INTERNATIONAL INTEREST	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL — PIN CONTACT, NO 12,14 & 16 A.W.G WATERPROOF	MILITARY STANDARD MS33800
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 3

DD FORM 1 OCT 61 672-1 (COORDINATED)

FED SUP CLASS
5935

USER ACTIVITIES

REVIEWER ACTIVITIES

NOTES

1 FOR MATING CONNECTORS SEE MS27143 AND MS27144

2 MATERIAL
SHELL RUBBER GRADE SC615, A_1 C_1 E_3 F_2, ASTM-D-2000 Ⓓ
TERMINAL BRASS, COMPOSITION 11 OR 22, TEMPER HALFHARD MINIMUM, QQ-B-626

3 PROTECTIVE FINISH TERMINAL, SILVER PLATE, TYPE II, GRADE A, 0002 MINIMUM THICKNESS, QQ-S-365

4 STYLE II TO BE USED WITH RIBBED CONNECTOR TO DENOTE POLARITY

5. STYLE II DIMENSIONS IDENTICAL TO STYLE I EXCEPT AS NOTED

6 TERMINAL SHALL BE ATTACHED TO COMPONENT AND SHALL WITHSTAND A PULL TEST OF 100 POUNDS (46 KILOGRAMS)

7 FOR MULTIPLE CONNECTOR DESIGN, MINIMUM CAVITY CENTER DISTANCE SHALL BE 600 INCHES

8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFECT ON THE DATE OF INVITATIONS FOR BID

10. WHEN CONNECTORS ARE COUPLED, THE VOLTAGE DROP SHALL NOT EXCEED 20 MILLIVOLTS WHEN TESTED IN A 28 VOLT CIRCUIT AS OUTLINED IN MIL-STD-202, METHOD 307

11. WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE 1000 VOLT REQUIREMENT OF THE DIELECTRIC STRENGTH TEST OUTLINED IN MIL-STD-202, METHOD 302

12 WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE REQUIREMENTS OF THE WATERPROOFNESS TEST OUTLINED IN MIL-STD-1184

13 WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE REQUIREMENTS OF SALT SPRAY CORROSION TEST OUTLINED IN MIL-STD-202, METHOD 101 (5% SALINE, 200 HRS)

Ⓓ 14 RECYCLED, VIRGIN AND RECLAIMED MATERIALS THERE ARE NO REQUIREMENTS FOR THE EXCLUSIVE USE OF VIRGIN MATERIALS, HOWEVER, ALL MATERIALS SHALL BE NEW AND UNUSED THE USE OF RECYCLED OR RECLAIMED (RECOVERED) MATERIALS IS ACCEPTABLE PROVIDED THAT ALL OTHER REQUIREMENTS OF THIS STANDARD ARE MET

ALL PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO-STANAG 4040 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

APPROVED 1 SEPT, 1967 REVISED Ⓓ FOR CHANGES SEE PAGE 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A. Other Cust	INTERNATIONAL INTEREST	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL — PIN CONTACT, NO 12,14 & 16 A W.G WATERPROOF	MILITARY STANDARD MS33800
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 3 OF 3

DD FORM 1 MAY 71 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.