

FED. SUP CLASS
5935

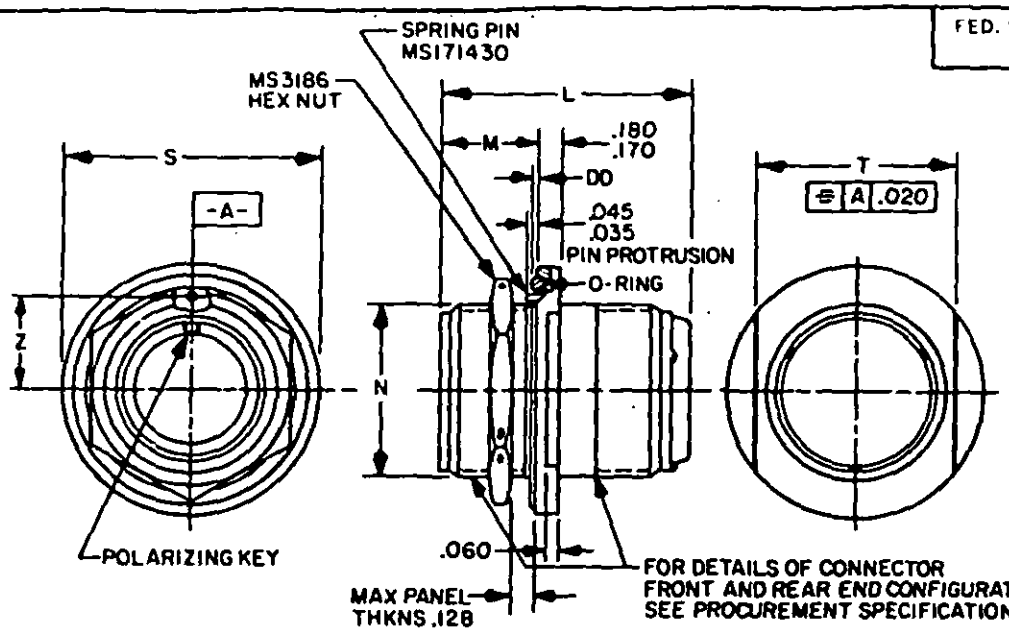

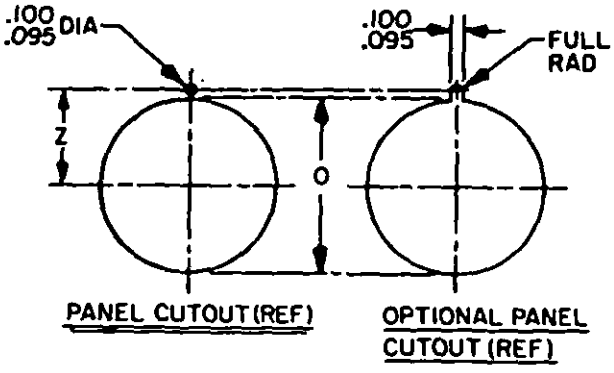

CLASSES D, L, U & W ENVIRONMENT RESISTANT

Classes R and S cancelled after 18 Oct 71.
Classes K and Y cancelled after 5 Apr 72.
Classes L, U, and W inactive for design after 23 Mar 76.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
4. MIL-C-5015 front and rear release crimp contact, and solder contact connectors are intermateable.
5. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
6. (G) For insert arrangements see MIL-STD-1651.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

(G) DENOTES CHANGES

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3404(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 1 OF 3

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-N035-4

APPROVED 7 Nov 69 REVISED (E) 13 Aug 73 (F) 17 DEC 75 (G) 23 MAR 76

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

Review activities:

User activities:

SIZE	L MAX. SIZE 16 & 12 CONT.'S	L MAX. SIZE 8, 4 & 10 CONT.'S	M ±.005	N +.000 -.005 DIA	O +.015 -.000 DIA	S ±.005 DIA	T ±.010 FLATS	Z ±.005	DD ±.008 O RING PROJECT.	ARP 568 NO. 1/ O RING	MS3186 DASH NO. (REF)
8S	2.031		.720	.500	.505	1.072	.865	.326		-020	-25, -26, -27
10S	2.031		.720	.625	.630	1.193	.990	.385		-021	-31, -32, -33
10SL	2.031		.720	.625	.630	1.193	.990	.385		-021	-31, -32, -33
12S	2.031		.720	.750	.755	1.317	1.050	.448		-023	-37, -38, -39
12	2.125		.966	.750	.755	1.317	1.050	.448		-023	-37, -38, -39
14S	2.031		.720	.875	.880	1.443	1.175	.510	.020	-026	-40, -41, -42
14	2.125		.966	.875	.880	1.443	1.175	.510		-026	-40, -41, -42
16S	2.031		.720	1.000	1.005	1.567	1.300	.573		-028	-43, -44, -45
16				1.000	1.005	1.567	1.300	.573		-028	-43, -44, -45
18				1.125	1.130	1.693	1.425	.635		-029	-46, -47, -48
20				1.250	1.255	1.817	1.550	.698		-030	-49, -50, -51
22				1.375	1.380	1.943	1.550	.760		-131	-52, -53, -54
24				1.500	1.505	2.067	1.800	.823		-133	-55, -56, -57
28	2.125	2.500	.966	1.750	1.755	2.317	1.925	.948		-137	-61, -62, -63
32				2.000	2.005	2.567	2.175	1.073		-141	-64, -65, -66
36				2.250	2.255	2.817	2.550	1.198	.026	-145	-67, -68, -69
40				2.500	2.505	3.061	2.800	1.323		-149	-70, -71, -72
44				2.750	2.755	3.311	3.050	1.448		-151	-73, -74, -75
48				3.000	3.005	3.561	3.300	1.573		-152	-76, -77, -78

(G)

1/ Society of automotive engineers' standard

DD FORM 1 MAY 73 672 (Limited coordinated) previous editions of this form are obsolete

P.A Navy - AS

Other Cust

Procurement Specification: MIL-C-5015

Supersedes:

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE

MILITARY STANDARD

MS3404(NAVY)

PAGE 2 OF 3

FED. SUP CLASS 5935


APPROVED 7 Nov 69

REVISED (F) For change see page 1 (G) FOR CHANGES SEE PAGES 1,2 AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

EXAMPLE OF PART NO.: MS3404L 28-21PX

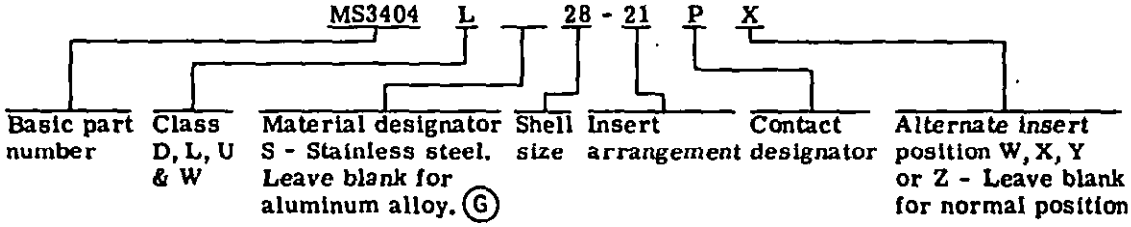

APPROVED 7 Nov 69 REVISED (F) For change see page 1 (G) FOR CHANGES SEE PAGES 1, 2 AND 3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.
NAVY AS

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3404(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/4318

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.