This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

DD FORM 672-1 (Coordinated)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1977-703-020/9059

P.A. Other Cord CE DOCKS

PROCUREMENT SPECIFICATION MIL-A-13488

SUPERSEDES


TITLE

AIR CLEANER, INTAKE-OIL-BATH TYPE, FOR INDUSTRIAL ENGINES (TYPE II OF PROCUREMENT SPECIFICATION)

MILITARY STANDARD

MS 35875

SHEET 1 OF 1

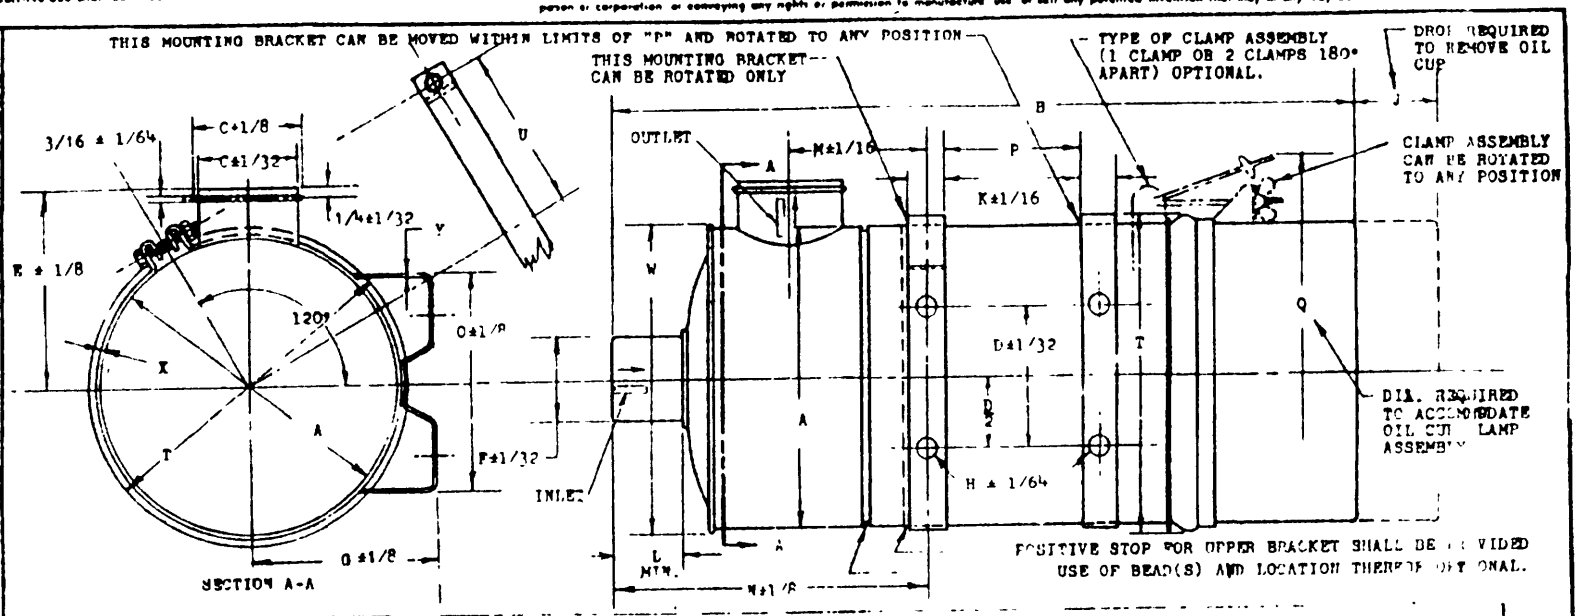

DASH NO	RATED AIR CLEANER AIR FLOW (CFM)	DIMENSIONS MAXIMUM A	B ± J	K	*T	U	*V	MINIMUM L	*Y	*Y	FIXED C	D	E	F	G	H	X	M	N	P	R
-1	40	4-1/2	17	9	5-3/4	3-1/4	3-1/4	2	18 GA	18 GA	1-1/2	3-1/4	4-1/2	1-3/4	2-11/16	11/32	3/4	2	6-1/4	4	3-1/4
-2	60	5-1/4	17-3/4	9-1/2	6-1/4	3-1/2	5-3/4	2	14 GA	16 GA	1-3/4	3-1/4	4-3/4	2	3-3/16	11/32	7/8	2	6-3/8	4	3-1/4
-3	90	6	19	10-1/2	7-1/4	4	6-3/4	2	14 GA	16 GA	2	3-1/4	5-1/4	2	3-9/16	11/32	1	2-1/4	7-1/4	4-1/2	3-1/4
-4	135	7-1/2	21-3/4	12	8-3/4	4-3/4	8-1/4	3	14 GA	16 GA	2-1/4	4-1/2	6	2-1/2	4-1/8	25/64	1-1/8	3	8-7/8	5-3/8	3-3/4
-5	200	9	23-1/4	13-1/2	10-1/4	5-1/2	9-3/4	3	12 GA	14 GA	3	4-1/2	6-3/4	3	5-1/8	29/64	1-1/4	3-1/2	9-3/4	5-5/8	4-1/2
-6	300	10-1/2	28	15	11-3/4	6-1/4	11-1/4	4	12 GA	14 GA	3-1/2	5	7-1/2	3-3/4	5-3/4	7/16	1-1/4	3-3/4	11-1/4	6	4-1/4
-7	450	12	30-3/4	16-1/2	13-1/4	7	12-3/4	4	10 GA	12 GA	4	6	8-1/4	4-1/2	7	9/16	1-1/2	4-1/2	12-1/4	7-3/4	5-1/4
-8	615	14	31-3/4	18-1/2	15-1/4	8	14-3/4	4	3/16	12 GA	5	8	9-1/4	5	8	9/16	1-1/2	5	13-1/2	9-3/4	7-3/4

NOTES:
1. Application rating shall be not more than 125% or less than 60% of rated air cleaner air flow.
*2. W - Maximum O.D. of localized beads or protrusions except as otherwise noted.
*3. T - Maximum O.D. of cup to body clamp, below lower mounting bracket.
4. Modifications in outside appearance and construction are acceptable provided interchangeability of cleaner assembly is not affected.
5. All dimensions are in inches, unless otherwise specified.
6. For design feature purposes, this standard takes precedence over documents referenced herein.
7. The MS part number consists of the MS sheet number plus the dash number: EXAMPLE: MS 35875-1.
*8. Y & X - "American Iron & Steel Institute" - Standard Mill Practices
9. Referenced documents shall be the issue in effect on date of invitation for bids.

(A) ENTIRE STANDARD REVISED

FED. SUP CLASS 2940

APPROVED 28 Jan 1958 REVISED (A) 16 May 1962

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.