FED. SUP CLASS
5365

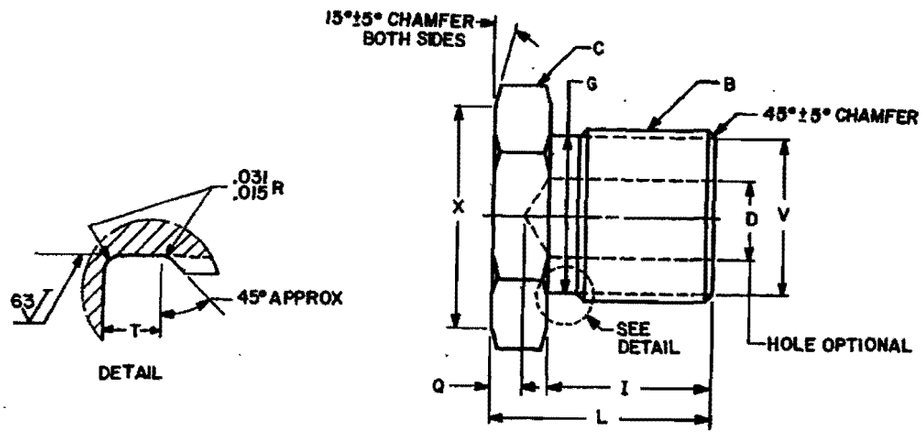


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO	TURE OD (REF)	B STRAIGHT THREAD	C HEX (ACROSS FLATS) MAX	C HEX (ACROSS FLATS) MIN	D DIA ±.015	G DIA +.002 -.003	I ±.005	L ±.02	Q MIN	T +.015 -.000	V DIA ±.015	X DIA +.000 -.015
21	.125	.313-24UNF-2A	.439	.430	.093	.250	.297	.60	.06	.063	.250	.438
22	.188	.375-24UNF-2A	.502	.492	.125	.313	.297	.60	.08	.063	.310	.500
23	.250	.438-20UNF-2A	.564	.553	.203	.364	.360	.67	.10	.075	.365	.563
24	.313	.500-20UNF-2A	.627	.616	.234	.427	.360	.67	.12	.075	.425	.625
25	.375	.563-18UNF-2A	.690	.679	.297	.482	.391	.73	.16	.083	.480	.688
26	.500	.750-16UNF-2A	.877	.865	.422	.660	.438	.90	.22	.094	.660	.875
27	.625	.875-14UNF-2A	1.002	.990	.500	.773	.500	.93	.25	.107	.775	1.000
28	.750	1.063-12UN-2A	1.252	1.239	.656	.985	.594	1.09	.25	.125	.985	1.250
29	.875	1.188-12UN-2A	1.377	1.364	.718	1.070	.594	1.09	.25	.125	1.070	1.375
30	1.000	1.313-12UN-2A	1.502	1.489	.875	1.195	.594	1.12	.25	.125	1.195	1.500
31	1.250	1.625-12UN-2A	1.877	1.863	1.093	1.507	.594	1.20	.25	.125	1.505	1.875
32	1.500	1.875-12UN-2A	2.127	2.113	1.344	1.756	.594	1.27	.25	.125	1.755	2.125
33	2.000	2.500-12UN-2A	2.752	2.738	1.813	2.381	.594	1.43	.30	.125	2.380	2.750

USER ACTIVITIES:
ARMY - CR, ME
NAVY - MC

REVIEW ACTIVITIES:
ARMY - EA, ER, GL
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 29 DEC 67
REVISED © 21 APR 83

© ENTIRE STANDARD REVISED

P. A. AR / Other Cust OS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		PLUG, MACHINE THREAD, O-RING	MS51840
PROCUREMENT SPECIFICATION MIL-F-18866	SUPERSEDES		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5365

REQUIREMENTS:

1. MATERIAL. STEEL, CARBON SHALL BE IN ACCORDANCE WITH FED-STD-66, 1113, 1117, 1118, 1137 OR 12L14.

   STEEL, CORROSION RESISTANT SHALL BE IN ACCORDANCE WITH QQ-S-763, CLASS 304/316 OR ASTM A 582-80, TYPE 303.

2. FINISH. STEEL, CARBON - CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II, CLASS 3 OR PHOSPHATE COAT IN ACCORDANCE WITH DOD-P-16232, TYPE M, CLASS 1.

   STEEL, CORROSION RESISTANT - CLEAN AND DESCALE IN ACCORDANCE WITH ANSI/ASTM A 380-78.

3. THREADS. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.

4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I AND A CODE LETTER INDICATING MATERIAL AND FINISH.

EXAMPLE: MS51840-21P

- MATERIAL AND FINISH CODE
  - P - CARBON STEEL, PHOSPHATE COAT
  - SS - CORROSION RESISTANT STEEL
  - NO CODE - CARBON STEEL, CADMIUM PLATE
- DASH NUMBER
- BASIC MS NUMBER

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 29 DEC 67 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:
ARMY - CR, ME
NAVY - MC

ACTIVITIES:
ARMY - EA, ER, GL
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AR / Other Cost OS	INTERNATIONAL INTEREST	TITLE: PLUG, MACHINE THREAD, O-RING	MILITARY STANDARD MS51840
PROCUREMENT SPECIFICATION: MIL-F-18866	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5365-0079

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.